

# Miniature Pushbutton Switches

## Specifications:

Contact rating:	250 V AC, 1 A / 125 V AC, 3 A 24 V DC, 2 A
Contact resistance:	< 30 mΩ
Insulation resistance:	> 500 MΩ at 500 V DC
Dielectric strength:	1000 V, 50 Hz for the duration of 1 minute
Operating temperature:	-45 °C to +110 °C
Mechanical life:	minimum 30 000 operations
Contacts:	coin silver, also available gold-plated, version G (see page 4)
Terminals:	solder tags
Material:	phenolformaldehyde MSP 103 B black, MSP 103 C brown
Mounting:	bushing M 6 x 0,75
Soldering conditions:	hand-soldering – max.: 20 W, 3 sec, 350 °C

## Models:


## Switching functions

S P S T

MSP 103 B  
MSP 103 C

on – (mom)  
off – mom

Button colour: orange

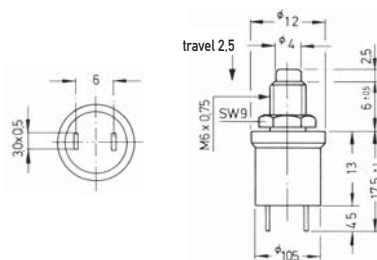

S P S T

MSP 103 BK  
MSP 103 CK

on – (mom)  
off – mom

Buttons see page 38.

