



ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

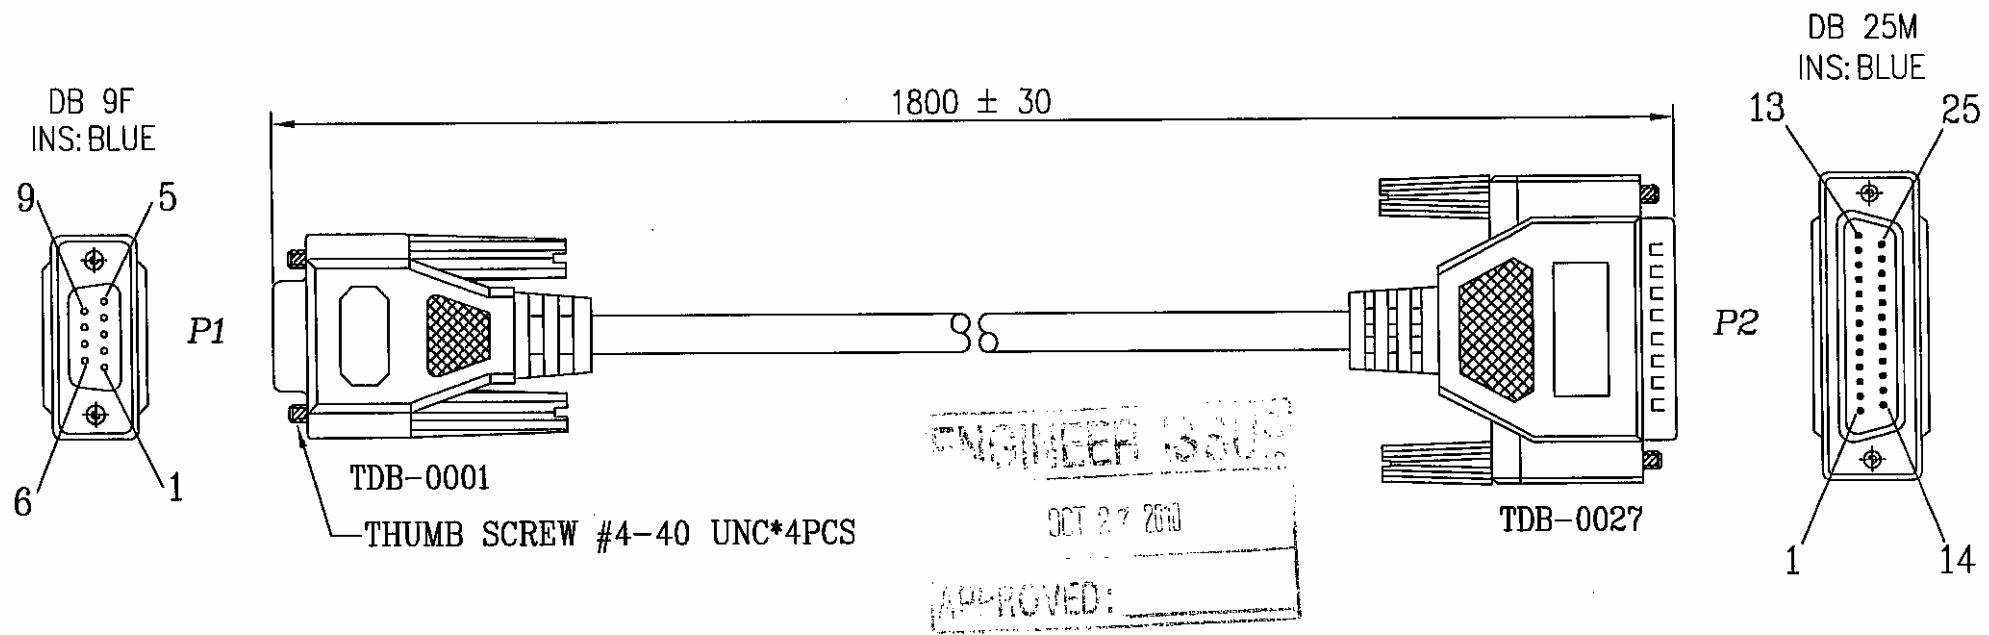

NOTE:

- CABLE: NON-UL 28AWG(7/0.127 T.C)*7C+DRAIN WIRE (26AWG 7/0.16) +AL-FOIL/MYLAR PVC JACKET;
COLOR: BEIGE(NK-A03), OD: $\phi 5.0 \pm 0.2$ mm.
- CONNECTOR:
P1: DB9 FEMALE GOLD FLASH CONTACT,NICKEL PLATED SHELL .
P2: DB25 MALE GOLD FLASH CONTACT,NICKEL PLATED SHELL .
- HOOD: MOLDED TYPE PVC 45P COLOR: BEIGE(NK-A03).
- ELECTRICAL TEST: 100% OPEN SHORT MIS WIRE TEST .
CONTACT RESISTANSE 3 OHMS MAX .
INSULATION RESISTANSE 10M OHMS MIN .
- PACKING: EACH PC / Maxxtro ZIPBAG(L) + LABEL

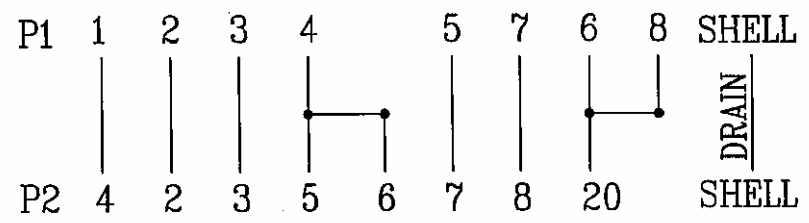

Tolerance Inch M/M			Maxxtro®			
.X	.015	.30	Title			
.XX	.010	.10	DB9F - DB25M CABLE			
.XXX	.005	.05	Customer P/N: 100390			
Draw	FANNIE 10/27/10'		App'd	Customer T-JPC		
Chek	Scale	NONE	Units	m/m	Third Angle Projection	
Engr	Dwg No.	120-3298	REV: A	Sheet	1/1	