

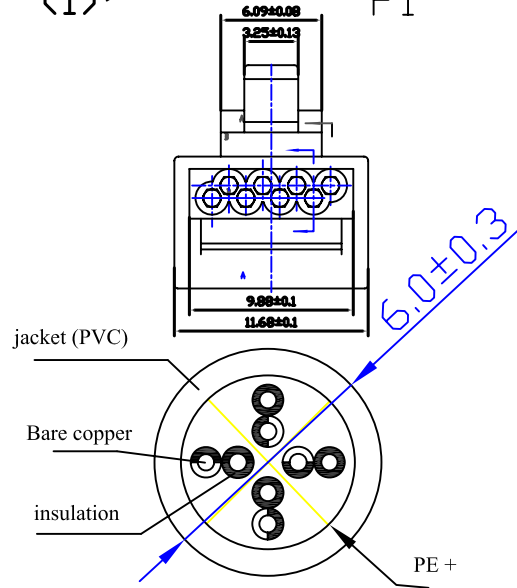


LTR.	REV.	DESCRIPTION	DATE
	A	FIRST ISSUE	2012. 2. 03

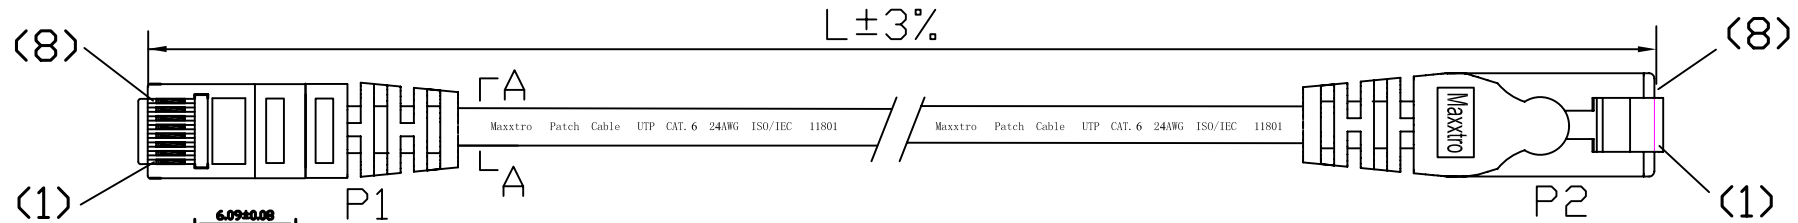

Connecting

P1	568B COLOR	P2
1	WH/ORG	1
2	ORG	2
3	WH/GRN	3
4	BLU	4
5	WH/BLU	5
6	GRN	6
7	WH/BWN	7
8	BWN	8



ITEM No.	LENGTH	PVC COLOR	PACKING
101906	300 ± 20MM	BLUE 567#	ZB-M

SPECIFICATIONS:

- 1. CONDUCTOR:
 - 1.1 CONDUCTORS: 24AWG 7*0.19± 0.015mm
 - 1.2 CONDUCTOR INSULATION COLOR CODING: ONE WHITE/ORANGE, ONE ORANGE, ONE WHITE/GREEN, ONE GREEN, ONE BLUE, ONE WHITE/BLUE, ONE WHITE/BROWN, ONE BROWN.
- 2. CABLE JACKET
 - 2.1 PRINTING ON THE JACKET: Maxxtro Patch Cable UTP CAT. 6 24AWG ISO/IEC 11801
- 3. CABLE ASSEMBLY
 - 3.1 SEE SECTION A-A FOR DIMENSIONS
 - 3.2 CABLE TIE: Assorted upon request
 - 3.3 WIRING T568B COLOR
 - 3.4 CONTACT PLUG: RJ45 8P8CS 15u pc UL 94V-2
- 4. CABLE JACKET COLOR: GY 687#; RED 172#; BLUE 567#; YELLOW 361#; GREEN 273#; BLACK 063#; WHITE 461#; ORANGE 760#; PINK 171#; PURPLE 964#
- 5. LENGTH: L ± 3%mm

				SIGN			REV.		SCALE		Maxxtro®
REMARK NO	CHA.NO	SIGNATURE	DATE								
DRAWN BY	Morgan			A						UTP CAT6 CABLE 24AWG	
CHECKED BY	宋巧										
AUDITED BY	缪传友	APPROVED BY	祁玉军								
CRAFT		DATE	2012. 2. 03	PAGE		OF					