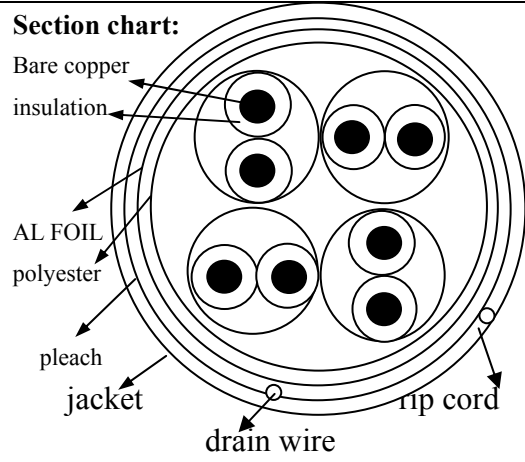


Product specification

Product	CAT5E SFTP SOLID 24AWG×4P	NO.	102066	Page	1/1
Edition		Established Date	2010-03-23	Revised Date	
Approval	XIANGFENG	Checked		Finish	SXF

Configuration & Physical Characters:

1. Conductor	Material	Bare Copper	
	Size	24AWG	
	Construction	1/0.531± 0.015	
2. Insulation	Material	HD-PE	
	Thickness	MIN at any point: 0.23mm MAX AVG:0.25 mm	
	Diameter	1.02 ± 0.01	
	Colors	Blue-White/Blue	
		Orange-White/Orange	
		Green-White/Green	
		Brown-White/Brown	
elongation	MIN 300%		
Tensile strength	MIN 1.682Kg/mm²		
3. stranding	polyester	0.025×20mm	
	AL FOIL	0.065×20mm	
	DRAIN WIRE	1/0.40mm	
	PLEACH	(Wire) 16×4×1/0.12mm	
4. Jacket	Material	PVC	
	Thickness	MIN at any point: 0.53mm MAX AVG: 0.57mm	
	Diameter	6.2± 0.2	
	Colors	Grey	
	Elongation	MIN 100%	
	Tensile strength	MIN 1.407Kg/mm²	
	Aging at 100°C for 168Hrs	MIN ELONGATION RETENTION: 50% MIN TENSILE SUENGTH RETENTION: 75%	
	Package Length	100m/Box	
Section chart: 			
5.Marking	Maxxtro NETWORK Cable SFTP CAT.5E 24AWG ISO/IEC 11801 xxxM		