

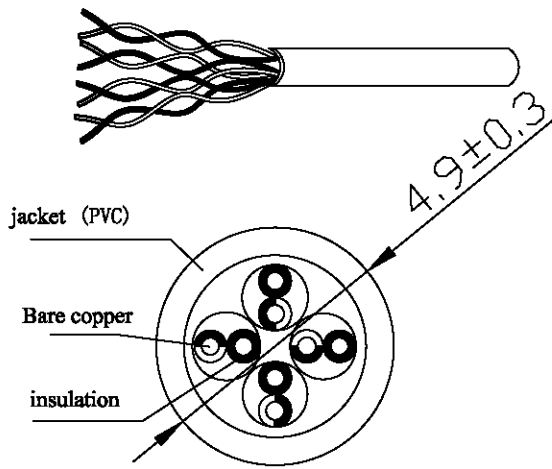


LTR.	REV.	DESCRIPTION	DATE
	A	FIRST ISSUE	2010.12.04

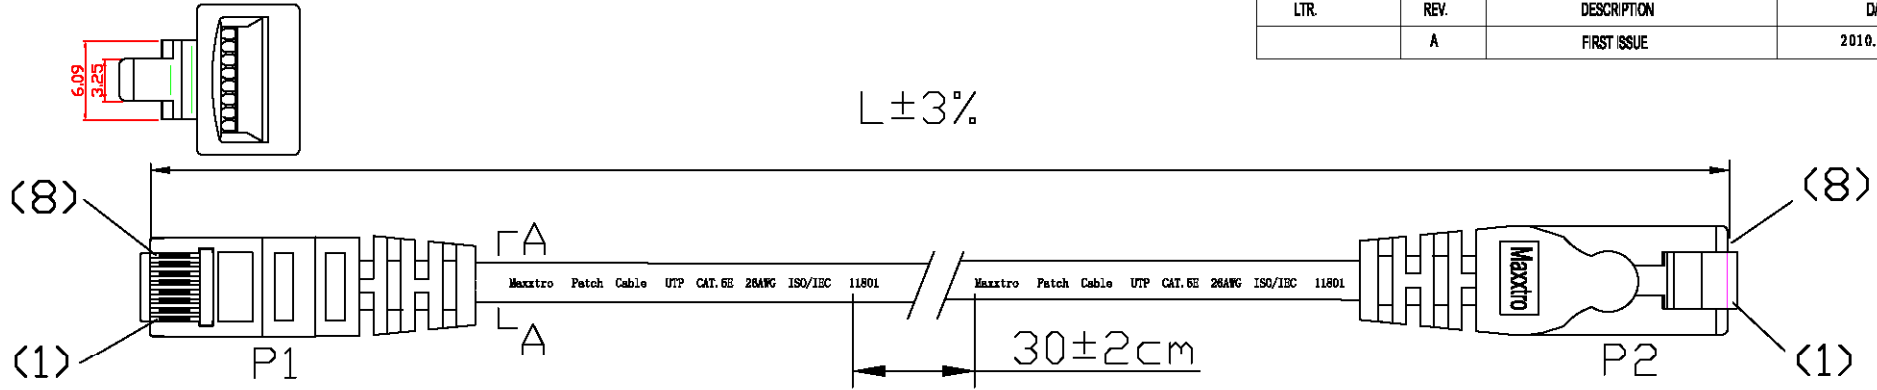

Connecting

P1	568B COLOR	P2
1	WH/ORG	1
2	ORG	2
3	WH/GRN	3
4	BLU	4
5	WH/BLU	5
6	GRN	6
7	WH/BWN	7
8	BWN	8



ITEM No.	LENGTH	PVC COLOR	PACKING
102195	300 ± 15MM	GREY 687#	ZB-M
102196	300 ± 15MM	BLUE 567#	ZB-M
102206	600 ± 20MM	BLUE 567#	ZB-M
102197	300 ± 15MM	YELLOW 361#	ZB-M
102222	3000 ± 60MM	YELLOW 361#	ZB-L
102204	1000 ± 20MM	RED 172#	ZB-M
102214	2000 ± 40MM	RED 172#	ZB-M

SPECIFICATIONS:

- 1. CONDUCTOR:
 - 1.1 CONDUCTORS: 26AWG 7*0.155±0.015mm
 - 1.2 CONDUCTOR INSULATION COLOR CODING: ONE WHITE/ORANGE, ONE ORANGE, ONE WHITE/GREEN, ONE GREEN, ONE BLUE, ONE WHITE/BLUE, ONE WHITE/BROWN, ONE BROWN.
- 2. CABLE JACKET
 - 2.1 PRINTING ON THE JACKET: Maxxtro Patch Cable UTP CAT.5E 26AWG ISO/IEC 11801
- 3. CABLE ASSEMBLY
 - 3.1 SEE SECTION A-A FOR DIMENSIONS
 - 3.2 CABLE TIE: Assorted upon request
 - 3.3 WIRING T568B COLOR
 - 3.4 CONTACT PLUG: RJ45 8P8C 15u pc UL 94V-2
- 4. CABLE JACKET COLOR: GY 687#; RED 172#; BLUE 567#; YELLOW 361#; GREEN 273#; BLACK 063#; WHITE 461#; ORANGE 760#; PINK 171#; PURPLE 964#
- 5. LENGTH: L±3%mm

				Maxxtro®				
REMARK NO	CHA.NO	SIGNATURE	DATE					
DRAWN BY	Morgan			SIGN	REV.	SCALE	UTP CAT5e CABLE 26AWG	
CHECKED BY	宋巧				A			
AUDITED BY	缪传友	APPROVED BY	祁玉军					
CRAFT	DATE	2011.1.6		PAGE OF				