

Maxxtro®




Product specification

Product	SFTP CAT5E SOLID 24AWG×4P	NO.	102284	Page	1/2
Edition		Established Date	2009-04-22	Revised Date	2010 11 4
Approval	RINGBO	Checked		Finish	Lili

Configuration & Physical Characters:

1. Conductor	Material	Bare Copper
	Size	4×2×0.51mm .24AWG
	Construction	1/0.51± 0.01
2. Insulation	Material	HD-PE
	Thickness	MIN at any point: 0.15mm MAX AVG:0.22 mm
	Diameter	0.95 ± 0.02
	Colors	Blue-White/Blue
		Orange-White/Orange
		Green-White/Green
		Brown-White/Brown
elongation	MIN 300%	
Tensile strength	MIN 1.682Kg/mm ²	
3. stranding	polyester	0.025×19mm
	AL FOIL	0.035×19mm
	DRAIN WIRE	1/0.40mm
	PLEACH	16×3×1/0.12mm (AIM)
4. Jacket	Material	PVC
	Thickness	MIN at any point: 0.40mm MAX AVG: 0.58mm
	Diameter	5.8 ± 0.2
	Colors	grey
	Package length	220m/box
5. Marking	Maxxtro NETWORK Cable SFTP CAT.5E 24AWG ISO/IEC 11801 xxxxxxm	

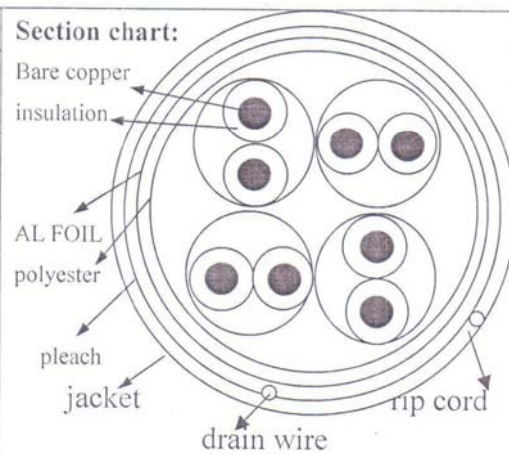

Maxxtro[®]



Product specification

Product	SFTP CAT5E SOLID 24AWG×4P	NO.	102284	Page	2/2
Edition		Established Date	2009-04-22	Revised Date	2010 11 4
Approval	QINGBO	Checked		Finish	Lili

Electric Characters:

90m FLUKE P-link test