

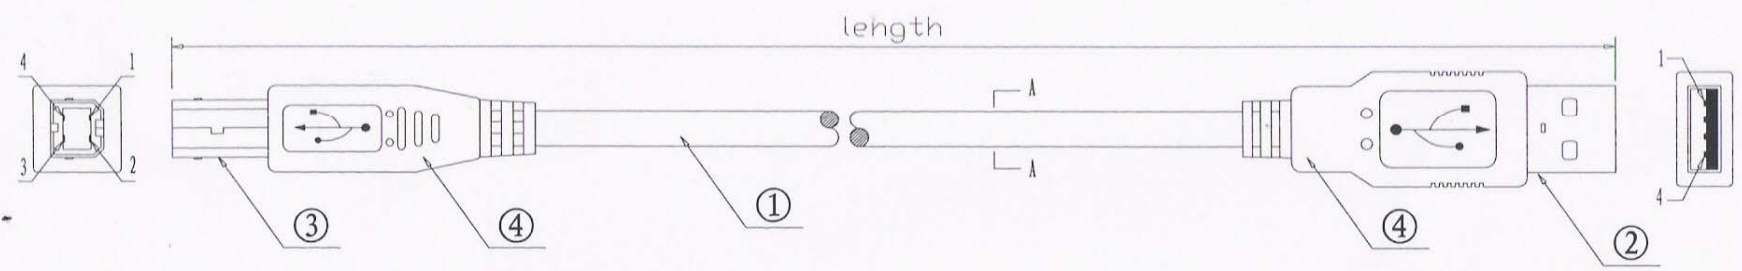



LTR	REV	DESCRIPTION	DATE
	A	FIRST ISSUE	2010.11.6

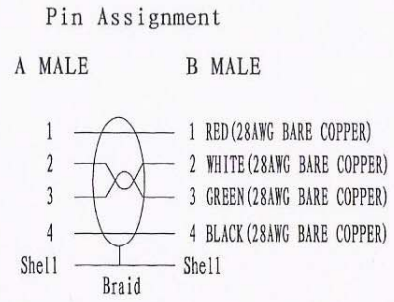

MARKING: Maxxtro AWM STYLE 2725 60° C 30V  
1P/28AWG AND 2C/28AWG USB 2.0



ITEM No.	LENGTH	PVC COLOR	PACKING
102290	1800 ± 30MM	GRAY 687#	ZB-M
102291	3000 ± 50MM	GRAY 687#	ZB-L
102302	3000 ± 50MM	GRAY 687#	BLISTER



④	MOLDING	OUTER MOLD: 45P PVC	9	G
③	USB-BM	USB BMALE CONNECTOR FLASH GOLD ;NICKEL PLATED SHELL	1	SET
②	USB-AM	USB AMALE CONNECTOR FLASH GOLD ;NICKEL PLATED SHELL	1	SET
①	CABLE	USB CABLE 28AWG/1P+28AWG/2C+AL+BRAID(48*0.12mm AL-MG) +PVC JACKET OD: 3.8 ± 0.2mm	L	M
NO	P/N	DESCRIPTION	QTY	UNIT

REMARK/NO	CHANO	SIGNATURE	DATE
DRAWN BY	Jason	SIGN	REV. SCALE
CHECKED BY	<i>[Signature]</i>	APPROVED BY	A
AUDITED BY	<i>[Signature]</i>	DATE	2010.11.6
CRAFT		PAGE	OF

**Maxxtro®**  
USB AM/BM-XXX