
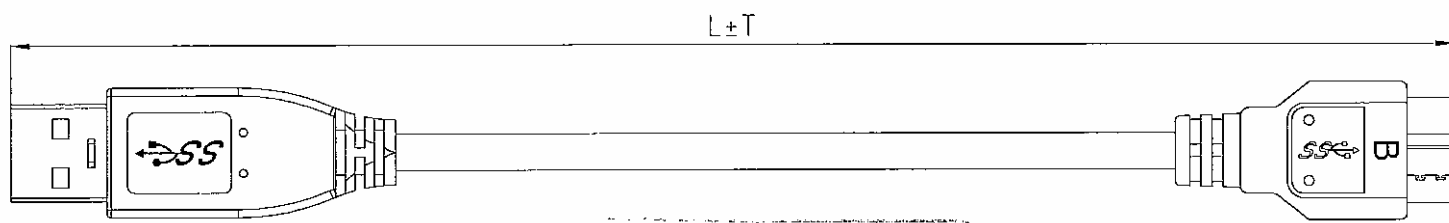



ROHS-COMPLIANT

LTR	REV	DESCRIPTION	DATE
△	B	ECR #100226-2 EDIT TOOLING	02/26/10'


USB 3.0 A/M 9PIN
INS:BLUE(PT 300C)



USB 3.0 MICRO B/M
INS:BLACK




TUSB-0189

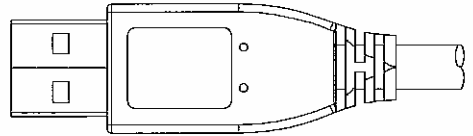

ENCIPHER ISSUE
FEB 26 2010
APPROVED: *[Signature]*

△TUSB-0207

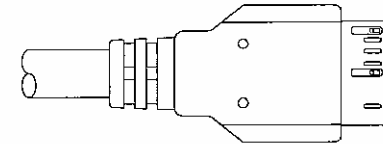

NOTE:

1.CABLE: UL-2725 [#30(7/0.1 T.C)×1P INS:Foam-PE+D.W(7/0.1 T.C)+AL/MY
+Hot-melt-Mylar]×2C+#30(7/0.1 T.C)×1P INS:Polyolefin
+#28(7/0.127 T.C)×2C INS:Polyolefin + AL/MY + B.D(85%)
PVC JACKET; OD:4.8±0.15mm COLOR:BLACK(NK-K01) REV 3.0.

2.CONNECTOR:

P1: USB 3.0 A TYPE MALE 9PIN CONTACT:30u",SHELL:NI-PLATED.
P2: USB 3.0 MICRO B TYPE MALE CONTACT:30u",SHELL:NI-PLATED.

3.HOOD:MOLDED TYPE,PVC 45P, COLOR:BLACK(NK-K01).

4.ELECTRICAL TEST:

- (1)100% OPEN SHORT & MIS WIRE TEST.
- (2)CONTACT RESISTANCE 3 ohm Max .
- (3)INSULATION RESISTANCE 10M ohm Min .
- (4)HI-POT DC300V

**5.PACKING:EACH PC/ MAXXTRO ZIP BAG + BAR CODE LABEL(SIZE:86×55mm)
MINI TIE COLOR:BLACK(NK-K01).**

P1	PIN OUT	P2	CABLE FUNCTION
1	RED	1	PWR
2	WHITE	2	UTP_D-
3	GREEN	3	UTP_D+
4	BLACK	5	GND_PWRrt
5	BLUE	6	SDP1-
6	YELLOW	7	SDP1+
7	D.W	8	SDP1_Drain & SDP2_Drain
8	PURPLE	9	SDP2-
9	ORANGE	10	SDP2+
SHELL	B.D	SHELL	SHELL

Tolerance	Inch	M/M
X	.015	.30
XX	.010	.10
XXX	.005	.05

Maxxtro®

Title			
USB 3.0 A/M - MICRO B/M CABLE			
Customer P/N			
App'd	<i>[Signature]</i>	Customer:	T-JPC
Scale	NONE	Units	M/M
Dwg No. 170-3757		REV:	B
Sheet:		1/2	

170-3757-3	104353	PB-3400-10	3000±30	7612320135077	L	LABEL 3
170-3757-2	104352	PB-3400-06	1800±30	7612320135060	M	LABEL 2
170-3757-1	104351	PB-3400-03	900±20	7612320135053	M	LABEL 1
DWG	PDT P/N	JPC P/N	L±T(mm)	BAR CODE NO.	ZIP BAG TYPE	LABEL