


Video Matrix Switch

4 In/4 Out- Any Combination Goes



Diagram

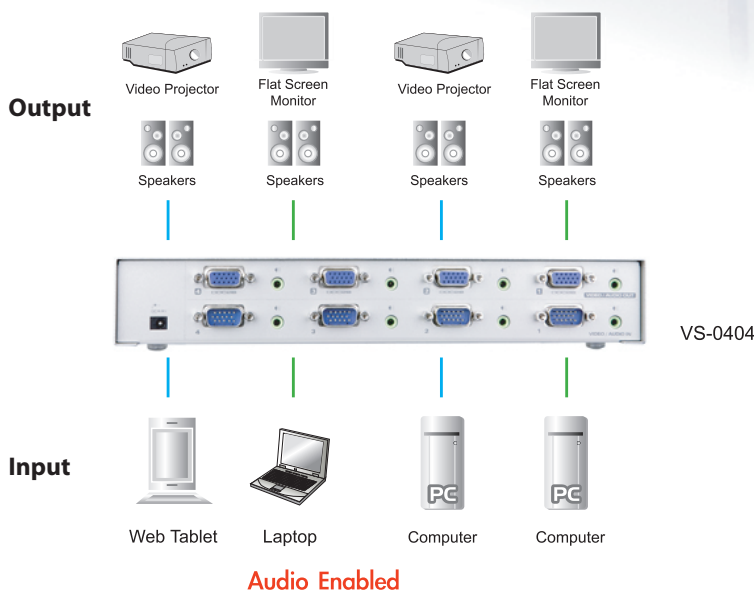

Model: **VS-0404**

Features

- Match any input to any output
- Outputs can be selected by using front panel push buttons
- Cascadable to other ATEN video splitters
- Stereo audio enabled
- Supports high resolution- up to 1920 x 1440@70Hz
- Separate the Video Matrix and monitors by up to 65m

Specifications

Model	VS-0404	
PC - Monitor Connection	4 - 4	
Connectors	Out	4 x HDB-15 (female) 4 x 3.5mm ministereero jack (female)
	In	4 x HDB-15 (male) 4 x 3.5mm ministereero jack (female)
	Power	DC Jack
LEDs	Power	1
	Activity 1	1 (green)
	Activity 2	1 (green)
	Activity 3	1 (green)
	Activity 4	1 (green)
Video1 ~ 4	4 (green)	
Push Buttons	4	
VGA Resolution	1920 x 1440 @70Hz (1.8m)	
VGA DDC2B Support	All Ports	
Signal Type	VGA / SVGA / XGA	
Sync Range	Sync Positive/Negative	
Power Consumption	DC5.3V, 12W	
Cable Distance	65 meters maximum (Video Matrix to monitor)	
Operating Temperature	0°~ 50°C (0 ~ 80% RH, Non-condensing)	
Storage Temperature	-20°~ 60°C (0 ~ 80% RH, Non-condensing)	
Enclosure	Metal	
Weight	890g	
Dimensions (LxWxH)	20 x 7.7 x 4.6 cm	