

# KST™

*Future Connection*

Non-Insulated Terminals



IECQ Certificate No.  
IECQ-H SGSTW 10.0003



## 健和興端子股份有限公司 K.S. TERMINALS INC.

彰化縣線西鄉彰濱工業區東三路8號

No.8, ZHANGBIN E. 3rd ROAD, XIANXI TOWNSHIP,  
CHANGHUA COUNTY 507, TAIWAN

MAIL/P.O. BOX 66, XIANXI, TAIWAN. 507

SALES/TEL:886-4-7582765 FAX:886-4-7582786










ADM./TEL:886-4-7580001 FAX:886-4-7580003

<http://www.ksterminals.com>

E-Mail:exp@ksterminals.com.tw

# TERMINALS

## RING TERMINALS 圓盤端子

mm <sup>2</sup>		ITEM NO.		d2		W		mm <sup>2</sup>		ITEM NO.		d2		W																																																																																																																																																																																																							
1.25				5.5		38		60		125		150		180		200		250		325																																																																																																																																																																																																	
																						2				8		70		80		100		125		150		180		200		250		325																																																																																																																																																																									
																																														3.5				14		100		100		100		125		150		180		200		250		325																																																																																																																																																	
																																																																						5.5				22		100		100		100		125		150		180		200		250		325																																																																																																																									
																																																																																														7.5				22		100		100		100		125		150		180		200		250		325																																																																																																	
																																																																																																																						10				22		100		100		100		125		150		180		200		250		325																																																																									
																																																																																																																																														16				22		100		100		100		125		150		180		200		250		325																																																	
																																																																																																																																																																						25				22		100		100		100		125		150		180		200		250		325																									
																																																																																																																																																																																														35				22		100		100		100		125		150		180		200		250		325	

### WIRE SIZE:

mm <sup>2</sup>	A.W.G.	mm <sup>2</sup>	A.W.G.
1.25	22-16	60	1/0
2	16-14	70	2/0
3.5	14-12	80	3/0
5.5	12-10	100	4/0
8	8	150	250/300 MCM
14	6	180	300/350 MCM
22	4	200	400/500 MCM
38	2	325	500/600 MCM


### STUD SIZE:



M3    M3.5    M4    M5    M6    M8    M10    M12    M16    M22    M24  
 #4    #6    #8    #10    1/4"    5/16"    3/8"    1/2"    5/8"    7/8"    15/16"


# TERMINALS

## SQUARE TONGUE TERMINALS 方型端子



mm <sup>2</sup>	ITEM NO.	d2	W
22	<b>SQNBS22-5</b>	5.3	12.5
	<b>SQNBS22-6</b>	6.4	12.5
	<b>SQNBS22-8</b>	8.4	12.5
38	<b>SQNBS38-5</b>	5.3	13.2
	<b>SQNBS38-6</b>	6.4	13.2
	<b>SQNBS38-8</b>	8.4	13.2
60	<b>SQNBS60-6</b>	6.4	16.0
	<b>SQNBS60-8</b>	8.4	16.0
	<b>SQNBS60-10</b>	10.5	16.0
80	<b>SQNBS80-6</b>	6.4	21.8
	<b>SQNBS80-8</b>	8.4	21.8
	<b>SQNBS80-10</b>	10.5	21.8
	<b>SQNBS80-12</b>	13.0	21.8
100	<b>SQNBS100-8</b>	8.4	21.8
	<b>SQNBS100-10</b>	10.5	21.8
	<b>SQNBS100-12</b>	13.0	21.8
125	<b>SQNBS125-8</b>	8.4	21.8
	<b>SQNBS125-10</b>	10.5	21.8
	<b>SQNBS125-12</b>	13.0	21.8
150	<b>SQNBS150-8</b>	8.4	22.0
	<b>SQNBS150-10</b>	10.5	22.0
	<b>SQNBS150-12</b>	13.0	22.0
180	<b>SQNBS180-10</b>	10.5	30.0
	<b>SQNBS180-12</b>	13.0	30.0
200	<b>SQNBS200-10</b>	10.5	36.0
	<b>SQNBS200-12</b>	13.0	36.0
	<b>SQNBS200-16</b>	13.0	36.0
250	<b>SQNBS250-10</b>	10.5	36.0
	<b>SQNBS250-12</b>	13.0	36.0
325	<b>SQNBS325-12</b>	13.0	37.2
	<b>SQNBS325-16</b>	17.0	37.2
	<b>SQNBS325-18</b>	19.0	37.2


## HEAVY DUTY (HD SERIES) RING TERMINALS 圓盤(重負載)端子



T: 1.3 mm<sup>2</sup>


mm <sup>2</sup>	ITEM NO.	d2	W
2	<b>RNB 2-3.2-HD</b>	3.2	7.2
	<b>RNB 2-3.7-HD</b>	3.7	7.2
	<b>RNBS 2-4-HD</b>	4.3	7.2
	<b>RNBL 2-4-HD</b>	4.3	9.5
	<b>RNB 2-5-HD</b>	5.3	9.5
	<b>RNB 2-6-HD</b>	6.4	12.0
	<b>RNBM 2-6-HD</b>	6.4	12.0
	<b>RNB 2-8-HD</b>	8.4	15.0
	<b>RNB 2-10-HD</b>	10.5	15.0
	<b>RNB 2-12-HD</b>	13.0	19.2
	<b>RNB 2-14-HD</b>	15.0	32.0
	<b>RNB 2-16-HD</b>	17.0	32.0
	<b>RNB 2-18-HD</b>	19.0	32.0
	<b>RNB 2-20-HD</b>	21.0	32.0

## NON-INSULATED SPADE TERMINALS Y型端子




mm <sup>2</sup>	ITEM NO.	d2	W	
1.25	<b>SNB 1-3.2</b>	3.2	5.7	
	<b>SNBS 1-3.7</b>	3.7	5.7	
	<b>SNBL 1-3.7</b>	3.7	6.4	
	<b>SNBLL 1-3.7</b>	3.7	7.2	
	<b>SNBS 1-4</b>	4.3	6.4	
	<b>SNBM 1-4</b>	4.3	7.2	
	<b>SNBL 1-4</b>	4.3	8.1	
	<b>SNBS 1-5</b>	5.3	8.1	
	<b>SNBL 1-5</b>	5.3	9.5	
	<b>SNBS 1-6</b>	6.4	9.5	
	<b>SNBL 1-6</b>	6.4	12.0	
	2	<b>SNB 2-3.2</b>	3.2	5.7
<b>SNBS 2-3.7</b>		3.7	5.7	
<b>SNBL 2-3.7</b>		3.7	6.0	
<b>SNBLL 2-3.7</b>		3.7	7.2	
<b>SNBS 2-4</b>		4.3	6.4	
<b>SNBM 2-4</b>		4.3	7.2	
<b>SNBL 2-4</b>		4.3	8.1	
<b>SNBS 2-5</b>		5.3	8.1	
<b>SNBL 2-5</b>		5.3	9.3	
<b>SNBS 2-6</b>		6.4	9.3	
<b>SNBL 2-6</b>		6.4	12.0	
3.5		<b>SNB 3-3.7</b>	3.7	8.0
	<b>SNB 3-4</b>	4.3	8.0	
	<b>SNB 3-5</b>	5.3	8.0	
	<b>SNB 3-6</b>	6.4	12.0	
	<b>SNBS 5-3.7</b>	3.7	7.2	
5.5	<b>SNBS 5-3.7</b>	3.7	8.3	
	<b>SNBSS 5-4</b>	4.3	7.2	
	<b>SNBS 5-4</b>	4.3	8.3	
	<b>SNBL 5-4</b>	4.3	9.0	
	<b>SNB 5-5</b>	5.3	9.0	
	<b>SNBS 5-6</b>	6.4	9.0	
	<b>SNBL 5-6</b>	6.4	12.0	
	<b>SNB 5-8</b>	8.4	14.0	
	8	<b>SNB 8-5</b>	5.3	10.5
		<b>SNB 8-6</b>	6.4	10.8
14	<b>SNB 14-6</b>	6.4	11.0	
	<b>SNB 14-8</b>	8.4	13.8	

## (2 HOLES) RING TERMINALS 圓盤(2孔)端子




mm <sup>2</sup>	ITEM NO.	2*d2	A
60	<b>RNB60-10-2B</b>	11.0	32.0
	<b>RNB60-12-2B</b>	14.0	40.0
	<b>RNB60-14-2B</b>	16.0	40.0
70	<b>RNB70-10-2B</b>	11.0	32.0
	<b>RNB70-12-2B</b>	14.0	40.0
	<b>RNB70-14-2B</b>	16.0	40.0
80	<b>RNB80-10-2B</b>	11.0	32.0
	<b>RNB80-12-2B</b>	14.0	40.0
	<b>RNB80-14-2B</b>	16.0	40.0
100	<b>RNB100-10-2B</b>	11.0	32.0
	<b>RNB100-12-2B</b>	14.0	40.0
	<b>RNB100-14-2B</b>	16.0	40.0
150	<b>RNB150-12-2B</b>	14.0	40.0
	<b>RNB150-14-2B</b>	16.0	40.0
180	<b>RNB180-12-2B</b>	14.0	40.0
	<b>RNB180-14-2B</b>	16.0	40.0
200	<b>RNB200-12-2B</b>	14.0	40.0
	<b>RNB200-14-2B</b>	16.0	40.0
325	<b>RNB325-12-2B</b>	14.0	40.0
	<b>RNB325-14-2B</b>	16.0	40.0

## PARALLEL & BUTT CONNECTORS 平行&中接管




ITEM NO.	L	ITEM NO.	L
<b>PNT 0.5</b>	5.0	<b>BNT 0.5</b>	12.0
<b>PNT 1</b>	8.0	<b>BNT 1</b>	15.0
		<b>BNT 1-16</b>	16.0
<b>PNT 2</b>	8.0	<b>BNT 2</b>	15.0
		<b>BNT 2-16</b>	16.0
<b>PNT 3</b>	8.5	<b>BNT 3</b>	15.0
<b>PNT 5</b>	8.5	<b>BNT 5</b>	15.0
		<b>BNT 5-20</b>	20.0
<b>PNT 8</b>	9.5	<b>BNT 8</b>	21.0
<b>PNT 14</b>	11.0	<b>BNT 14</b>	26.0
<b>PNT 22</b>	13.5	<b>BNT 22</b>	29.0
		<b>BNT 22-58</b>	58.0
<b>PNT 38</b>	16.5	<b>BNT 38</b>	32.0
		<b>BNT 38-64</b>	64.0
<b>PNT 60</b>	19.0	<b>BNT 60</b>	36.0
		<b>BNT 60-72</b>	72.0
<b>PNT 70</b>	19.0	<b>BNT 70</b>	37.0
<b>PNT 80</b>	19.5	<b>BNT 80</b>	38.0
		<b>BNT 80-76</b>	76.0
<b>PNT 100</b>	20.0	<b>BNT 100</b>	38.0
		<b>BNT 100-76</b>	76.0
<b>PNT 150</b>	27.0	<b>BNT 150</b>	54.0
		<b>BNT 150-108</b>	108.0
<b>PNT 180</b>	28.5	<b>BNT 180</b>	57.0
		<b>BNT 180-114</b>	114.0
<b>PNT 200</b>	32.0	<b>BNT 200</b>	63.0
		<b>BNT 200-126</b>	126.0
<b>PNT 325</b>	37.0	<b>BNT 325</b>	72.0


## LOCKING SPADE TERMINALS 鎖式Y型端子





mm <sup>2</sup>	ITEM NO.	d2	W
1.25	<b>LSNB 1-3.7</b>	3.7	6.4
	<b>LSNBS 1-4</b>	4.3	7.2
	<b>LSNBL 1-4</b>	4.3	8.1
	<b>LSNBS 1-5</b>	5.3	8.1
	<b>LSNBL 1-5</b>	5.3	9.5
2	<b>LSNB 2-3.7</b>	3.7	6.0
	<b>LSNB 2-4</b>	4.3	7.2
	<b>LSNBL 2-4</b>	4.3	8.1
	<b>LSNBS 2-5</b>	5.3	8.1
	<b>LSNBL 2-5</b>	5.3	9.3
5.5	<b>LSNB 5-3.7</b>	3.7	8.3
	<b>LSNB 5-4</b>	4.3	8.3
	<b>LSNB 5-5</b>	5.3	9.0
	<b>LSNB 5-6</b>	6.4	12.0


# TERMINALS

PIN TERMINALS 圓針型端子			
			
mm <sup>2</sup>	ITEM NO.	D	L
1.25	<b>PTNB1-7</b>	1.9	11.8
	<b>PTNB1-9</b>	1.9	13.8
	<b>PTNB1-10</b>	1.9	14.8
	<b>PTNB1-12</b>	1.9	16.8
	<b>PTNB1-13</b>	1.9	17.8
	<b>PTNB1-14</b>	1.9	18.8
	<b>PTNB1-16</b>	1.9	20.8
2	<b>PTNB2-9</b>	1.9	13.8
	<b>PTNB2-10</b>	1.9	14.8
	<b>PTNB2-12</b>	1.9	16.8
	<b>PTNB2-13</b>	1.9	17.8
	<b>PTNB2-16</b>	1.9	21.0
5.5	<b>PTNB5-10</b>	2.8	17.0
	<b>PTNB5-13</b>	2.8	20.0
10	<b>PTNB10-12</b>	4.3	22.0
16	<b>PTNB16-13</b>	5.5	26.0
25	<b>PTNB25-15</b>	6.8	33.5
35	<b>PTNB35-20</b>	8.0	40.5
50	<b>PTNB50-20</b>	9.5	45.0
70	<b>PTNB70-25</b>	11.0	55.0
95	<b>PTNB95-25</b>	12.5	55.0


NON-INSULATED BLADE TERMINALS 平板型端子			
			
mm <sup>2</sup>	ITEM NO.	D	L
0.5	<b>DBNB 0.5-8</b>	1.5	12.0
1.25	<b>DBNB 1-9</b>	2.8	13.8
	<b>DBNB 1-10</b>	2.3	14.8
	<b>DBNB 1-11</b>	3.0	15.8
	<b>DBNB 1-13</b>	3.0	17.8
	<b>DBNB 1-14</b>	3.0	18.8
	<b>DBNB 1-18</b>	2.2	22.8
	<b>DBNBS 1-18</b>	2.0	22.8
2	<b>DBNB 2-9</b>	2.8	13.8
	<b>DBNB 2-10</b>	2.4	14.8
	<b>DBNB 2-13</b>	2.4	17.8
	<b>DBNBL 2-13</b>	3.0	17.8
	<b>DBNBLL2-13</b>	4.5	18.0
	<b>DBNBS 2-14</b>	2.1	18.8
	<b>DBNB 2-14</b>	2.4	18.8
	<b>DBNBL 2-14</b>	3.0	18.8
	<b>DBNBS 2-18</b>	2.0	22.8
	<b>DBNB 2-18</b>	2.2	22.8
	<b>DBNBL 2-18</b>	2.8	22.8
5.5	<b>DBNB 5-10</b>	2.8	16.0
	<b>DBNBS 5-14</b>	4.0	20.0
	<b>DBNB 5-14</b>	4.5	20.0
	<b>DBNBS 5-18</b>	2.0	24.0
	<b>DBNB 5-18</b>	4.5	24.0

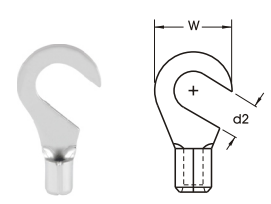NON-INSULATED HOOK TERMINALS 鉤型斜口端子			
			
mm <sup>2</sup>	ITEM NO.	d2	W
1.25	<b>HNB 1-3.7</b>	3.7	8.0
	<b>HNB 1-4</b>	4.3	8.0
	<b>HNB 1-5</b>	5.3	8.0
	<b>HNB 1-6</b>	6.4	11.6
2	<b>HNB 2-3.7</b>	3.7	8.5
	<b>HNB 2-4</b>	4.3	8.5
	<b>HNB 2-5</b>	5.3	9.5
	<b>HNB 2-6</b>	6.4	12.0
5.5	<b>HNB 5-3.7</b>	3.7	7.2
	<b>HNB 5-4</b>	4.3	9.5
	<b>HNB 5-5</b>	5.3	9.5
	<b>HNB 5-6</b>	6.4	12.0
	<b>HNB 5-8</b>	8.4	15.0
8	<b>HNB 2-3.7</b>	8.4	15.0

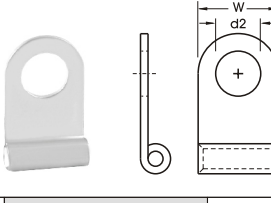
NON-INSULATED FLAG TERMINALS 旗型端子			
			
mm <sup>2</sup>	ITEM NO.	d2	W
1.25	<b>FGNB1-5</b>	5.3	9.6
2	<b>FGNB2-5</b>	5.3	9.6
	<b>FGNB2-6</b>	6.4	9.6
5.5	<b>FGNB5-4</b>	4.3	9.6
	<b>FGNB5-5</b>	5.3	9.6
	<b>FGNB5-6</b>	6.4	9.6
8	<b>FGNB8-5</b>	5.3	12.7
	<b>FGNB8-6</b>	6.4	12.7
	<b>FGNBL8-6</b>	6.4	15.5
	<b>FGNB8-8</b>	8.4	15.5
	<b>FGNB8-10</b>	10.5	15.5
14	<b>FGNB14-6</b>	6.4	12.7
	<b>FGNB14-8</b>	8.4	16.0
22	<b>FGNB22-6</b>	6.4	14.0
	<b>FGNB22-8</b>	8.4	17.5
38	<b>FGNB38-6</b>	6.4	18.3
	<b>FGNB38-8</b>	8.4	18.3
	<b>FGNB38-10</b>	10.5	18.3
60	<b>FGNB60-6</b>	6.4	22.3
	<b>FGNB60-8</b>	8.4	22.3
	<b>FGNB60-10</b>	10.5	22.3
	<b>FGNB60-12</b>	13.0	22.3
70	<b>FGNB70-8</b>	8.4	23.9
	<b>FGNB70-10</b>	10.5	23.9
	<b>FGNB70-12</b>	13.0	23.9
80	<b>FGNB80-10</b>	10.5	27.0
	<b>FGNB80-12</b>	13.0	27.0
100	<b>FGNB100-8</b>	8.4	28.6
	<b>FGNB100-10</b>	10.5	28.6
	<b>FGNB100-12</b>	13.0	28.6


COPPER TUBULAR LUGS (TL SERIES) 銅管單孔壓接端子(TL)			
			
mm <sup>2</sup>	ITEM NO.	d2	W
1.5	<b>TL1.5-5</b>	5.3	8.0
2	<b>TL2.5-4</b>	4.3	8.0
	<b>TL2.5-5</b>	5.3	8.0
	<b>TL2.5-6</b>	6.5	10.0
4	<b>TL4-4</b>	4.3	10.0
	<b>TL4-5</b>	5.3	10.0
	<b>TL4-6</b>	6.5	10.0
6	<b>TL6-4</b>	4.3	10.0
	<b>TL6-5</b>	5.3	10.0
	<b>TL6-6</b>	6.5	10.0
10	<b>TL10-6</b>	6.5	12.6
	<b>TL10-8</b>	8.4	12.6
16	<b>TL16-6</b>	6.5	12.6
	<b>TL16-8</b>	8.4	12.6
25	<b>TL25-6</b>	6.5	15.0
	<b>TL25-8</b>	8.4	15.0
	<b>TL25-10</b>	10.5	15.0
35	<b>TL35-6</b>	6.5	15.2
	<b>TL35-8</b>	8.4	15.2
	<b>TL35-10</b>	10.5	15.2
50	<b>TL50-8</b>	8.4	18.5
	<b>TL50-10</b>	10.5	18.5
	<b>TL50-12</b>	13.0	18.5
70	<b>TL70-8</b>	8.4	21.4
	<b>TL70-10</b>	10.5	21.4
	<b>TL70-12</b>	13.0	21.4
95	<b>TL95-10</b>	10.5	25.5
	<b>TL95-12</b>	13.0	25.5
120	<b>TL120-10</b>	10.5	28.3
	<b>TL120-12</b>	13.0	28.3
	<b>TL120-14</b>	15.0	28.3
	<b>TL120-16</b>	17.0	28.3
150	<b>TL150-12</b>	13.0	31.0
	<b>TL150-14</b>	15.0	31.0
	<b>TL150-16</b>	17.0	31.0
185	<b>TL185-12</b>	13.0	34.2
	<b>TL185-14</b>	15.0	34.2
	<b>TL185-16</b>	17.0	34.2
240	<b>TL240-14</b>	15.0	39.0
	<b>TL240-16</b>	17.0	39.0
	<b>TL240-18</b>	19.0	39.0
300	<b>TL300-14</b>	15.0	44.0
	<b>TL300-16</b>	17.0	44.0
	<b>TL300-18</b>	19.0	44.0
	<b>TL300-20</b>	21.0	44.0
	<b>TL300-22</b>	23.0	44.0
<b>TL300-24</b>	25.0	44.0	
400	<b>TL400-14</b>	15.0	51.0
	<b>TL400-16</b>	17.0	51.0
	<b>TL400-18</b>	19.0	51.0
	<b>TL400-20</b>	21.0	51.0
	<b>TL400-22</b>	23.0	51.0
<b>TL400-24</b>	25.0	51.0	
500	<b>TL500-14</b>	15.0	56.0
	<b>TL500-16</b>	17.0	56.0
	<b>TL500-18</b>	19.0	56.0
	<b>TL500-20</b>	21.0	56.0
	<b>TL500-22</b>	23.0	56.0
<b>TL500-24</b>	25.0	56.0	
630	<b>TL630-14</b>	15.0	63.0
	<b>TL630-16</b>	17.0	63.0
	<b>TL630-18</b>	19.0	63.0
	<b>TL630-20</b>	21.0	63.0
	<b>TL630-22</b>	23.0	63.0
<b>TL630-24</b>	25.0	63.0	

# TERMINALS

COPPER TUBULAR LUGS (TLK SERIES) 銅管單孔壓接端子(TLK)			
			
mm <sup>2</sup>	ITEM NO.	d2	W
0.75	<b>TLK0.75-3</b>	3.2	6.0
	<b>TLK0.75-4</b>	4.3	6.5
	<b>TLK0.75-5</b>	5.3	7.5
1.5	<b>TLK1.5-3</b>	3.2	6.5
	<b>TLK1.5-4</b>	4.3	6.5
	<b>TLK1.5-5</b>	5.3	7.5
	<b>TLK1.5-6</b>	6.4	9.0
2.5	<b>TLK2.5-3</b>	3.2	7.5
	<b>TLK2.5-4</b>	4.3	7.5
	<b>TLK2.5-5</b>	5.3	8.5
	<b>TLK2.5-6</b>	6.4	9.5
	<b>TLK2.5-8</b>	8.4	13.0
4	<b>TLK4-4</b>	4.3	8.5
	<b>TLK4-5</b>	5.3	9.0
	<b>TLK4-6</b>	6.4	10.0
	<b>TLK4-8</b>	8.4	13.0
6	<b>TLK6-4</b>	4.3	10.0
	<b>TLK6-5</b>	5.5	10.0
	<b>TLK6-6</b>	6.5	12.0
	<b>TLK6-8</b>	8.4	15.0
	<b>TLK6-10</b>	10.5	17.0
10	<b>TLK10-4</b>	4.3	12.0
	<b>TLK10-5</b>	5.5	12.0
	<b>TLK10-6</b>	6.4	12.0
	<b>TLK10-8</b>	8.4	15.0
16	<b>TLK16-5</b>	5.5	12.0
	<b>TLK16-6</b>	6.4	12.0
	<b>TLK16-8</b>	8.4	15.0
	<b>TLK16-10</b>	10.5	17.0
25	<b>TLK25-5</b>	5.5	14.0
	<b>TLK25-6</b>	6.4	14.0
	<b>TLK25-8</b>	8.4	16.0
	<b>TLK25-10</b>	10.5	18.0
35	<b>TLK35-6</b>	6.4	17.0
	<b>TLK35-8</b>	8.4	17.0
	<b>TLK35-10</b>	10.5	19.0
	<b>TLK35-12</b>	13.0	21.0
50	<b>TLK50-6</b>	6.4	20.0
	<b>TLK50-8</b>	8.4	20.0
	<b>TLK50-10</b>	10.5	20.0
	<b>TLK50-12</b>	13.0	23.0
	<b>TLK50-14</b>	15.0	23.0
70	<b>TLK70-6</b>	6.4	23.0
	<b>TLK70-8</b>	8.4	23.0
	<b>TLK70-10</b>	10.5	23.0
	<b>TLK70-12</b>	13.0	23.0
	<b>TLK70-14</b>	15.0	23.0
	<b>TLK70-16</b>	17.0	28.0
<b>TLK70-20</b>	21.0	30.0	

mm <sup>2</sup>	ITEM NO.	d2	W
95	<b>TLK95-6</b>	6.4	26.0
	<b>TLK95-8</b>	8.4	26.0
	<b>TLK95-10</b>	10.5	26.0
	<b>TLK95-12</b>	13.0	26.0
	<b>TLK95-14</b>	15.0	26.0
	<b>TLK95-16</b>	17.0	28.0
<b>TLK95-20</b>	21.0	36.0	
120	<b>TLK120-8</b>	8.4	28.0
	<b>TLK120-10</b>	10.5	28.0
	<b>TLK120-12</b>	13.0	28.0
	<b>TLK120-14</b>	15.0	28.0
	<b>TLK120-16</b>	17.0	30.0
	<b>TLK120-20</b>	21.0	36.0
150	<b>TLK150-8</b>	8.4	31.0
	<b>TLK150-10</b>	10.5	31.0
	<b>TLK150-12</b>	13.0	31.0
	<b>TLK150-14</b>	15.0	31.0
	<b>TLK150-16</b>	17.0	31.0
	<b>TLK150-20</b>	21.0	36.0
185	<b>TLK185-10</b>	10.5	35.0
	<b>TLK185-12</b>	13.0	35.0
	<b>TLK185-14</b>	15.0	35.0
	<b>TLK185-16</b>	17.0	35.0
	<b>TLK185-20</b>	21.0	39.0
	240	<b>TLK240-10</b>	10.5
<b>TLK240-12</b>		13.0	39.0
<b>TLK240-14</b>		15.0	39.0
<b>TLK240-16</b>		17.0	39.0
<b>TLK240-20</b>		21.0	39.0
300	<b>TLK300-12</b>	13.0	43.0
	<b>TLK300-14</b>	15.0	43.0
	<b>TLK300-16</b>	17.0	43.0
	<b>TLK300-20</b>	21.0	43.0
400	<b>TLK400-12</b>	13.0	49.0
	<b>TLK400-14</b>	15.0	49.0
	<b>TLK400-16</b>	17.0	49.0
	<b>TLK400-20</b>	21.0	49.0

COPPER TUBULAR LUGS (TCL-2A SERIES) 高壓銅管雙孔壓接端子			
			
mm <sup>2</sup>	ITEM NO.	2*d2	W
70	<b>TCL70-2A</b>	13.0	20.2
95	<b>TCL95-2A</b>	10.5	23.2
150	<b>TCL150-2A</b>	13.0	28.7
300	<b>TCL300-2A</b>	15.0	41.0

COPPER TUBULAR LUGS (TLD SERIES) 中高壓銅管單孔壓接端子			
			
mm <sup>2</sup>	ITEM NO.	d2	W
6	<b>TLD5-6</b>	5.3	8.5
	<b>TLD6-6</b>	6.4	8.5
10	<b>TLD5-10</b>	5.3	9.0
	<b>TLD6-10</b>	6.4	9.0
16	<b>TLD6-16</b>	6.4	13.0
	<b>TLD8-16</b>	8.4	13.0
	<b>TLD10-16</b>	10.5	17.0
25	<b>TLD6-25</b>	6.4	14.0
	<b>TLD8-25</b>	8.4	16.0
	<b>TLD10-25</b>	10.5	17.0
	<b>TLD12-25</b>	13.0	19.0
35	<b>TLD8-35</b>	8.4	17.0
	<b>TLD10-35</b>	10.5	19.0
	<b>TLD12-35</b>	13.0	21.0
50	<b>TLD8-50</b>	8.4	20.0
	<b>TLD10-50</b>	10.5	22.0
	<b>TLD12-50</b>	13.0	24.0
	<b>TLD16-50</b>	17.0	28.0
70	<b>TLD8-70</b>	8.4	24.0
	<b>TLD10-70</b>	10.5	24.0
	<b>TLD12-70</b>	13.0	24.0
	<b>TLD16-70</b>	17.0	30.0
95	<b>TLD10-95</b>	10.5	28.0
	<b>TLD12-95</b>	13.0	28.0
	<b>TLD16-95</b>	17.0	32.0
120	<b>TLD10-120</b>	10.5	32.0
	<b>TLD12-120</b>	13.0	32.0
	<b>TLD16-120</b>	17.0	32.0
	<b>TLD20-120</b>	21.0	38.0
150	<b>TLD10-150</b>	10.5	34.0
	<b>TLD12-150</b>	13.0	34.0
	<b>TLD16-150</b>	17.0	34.0
	<b>TLD20-150</b>	21.0	40.0
185	<b>TLD10-185</b>	10.5	37.0
	<b>TLD12-185</b>	13.0	37.0
	<b>TLD16-185</b>	17.0	37.0
	<b>TLD20-185</b>	21.0	40.0
240	<b>TLD12-240</b>	13.0	42.0
	<b>TLD16-240</b>	17.0	42.0
	<b>TLD20-240</b>	21.0	45.0
300	<b>TLD16-300</b>	17.0	48.0
	<b>TLD20-300</b>	21.0	48.0
400	<b>TLD16-400</b>	17.0	55.0
400	<b>TLD20-400</b>	21.0	55.0
500	<b>TLD20-500</b>	21.0	60.0
625	<b>TLD20-625</b>	21.0	60.0
800	<b>TLD20-800</b>	21.0	75.0
1000	<b>TLD20-1000</b>	21.0	85.0

# TERMINALS

COPPER TUBULAR LUGS (TLK-90D SERIES) 銅管90°壓接端子			
mm <sup>2</sup>	ITEM NO.	d2	W
6	TLK6-5-90D	5.5	10.0
	TLK6-6-90D	6.4	12.0
	TLK6-8-90D	8.4	14.0
	TLK6-10-90D	10.5	17.0
	TLK6-12-90D	13.0	19.0
10	TLK10-5-90D	5.5	12.0
	TLK10-6-90D	6.4	12.0
	TLK10-8-90D	8.4	15.0
	TLK10-10-90D	10.5	17.0
	TLK10-12-90D	13.0	19.0
16	TLK16-5-90D	5.5	12.0
	TLK16-6-90D	6.4	12.0
	TLK16-8-90D	8.4	15.0
	TLK16-10-90D	10.5	17.0
	TLK16-12-90D	13.0	19.0
25	TLK25-5-90D	5.5	14.0
	TLK25-6-90D	6.4	14.0
	TLK25-8-90D	8.4	16.0
	TLK25-10-90D	10.5	18.0
	TLK25-12-90D	13.0	19.0
35	TLK35-6-90D	6.4	17.0
	TLK35-8-90D	8.4	17.0
	TLK35-10-90D	10.5	19.0
	TLK35-12-90D	13.0	21.0
	TLK35-14-90D	15.0	21.0
50	TLK50-6-90D	6.4	20.0
	TLK50-8-90D	8.4	20.0
	TLK50-10-90D	10.5	20.0
	TLK50-12-90D	13.0	23.0
	TLK50-14-90D	15.0	23.0
70	TLK70-6-90D	6.4	23.0
	TLK70-8-90D	8.4	23.0
	TLK70-10-90D	10.5	23.0
	TLK70-12-90D	13.0	23.0
	TLK70-14-90D	15.0	23.0
95	TLK95-8-90D	8.4	26.0
	TLK95-10-90D	10.5	26.0
	TLK95-12-90D	13.0	26.0
	TLK95-14-90D	15.0	26.0
	TLK95-16-90D	17.0	28.0
120	TLK120-8-90D	8.4	28.0
	TLK120-10-90D	10.5	28.0
	TLK120-12-90D	13.0	28.0
	TLK120-14-90D	15.0	28.0
	TLK120-16-90D	17.0	30.0
150	TLK150-8-90D	8.4	31.0
	TLK150-10-90D	10.5	31.0
	TLK150-12-90D	13.0	31.0
	TLK150-14-90D	15.0	31.0
	TLK150-16-90D	17.0	31.0
185	TLK185-10-90D	10.5	35.0
	TLK185-12-90D	13.0	35.0
	TLK185-14-90D	15.0	35.0
	TLK185-16-90D	17.0	35.0
	TLK185-20-90D	21.0	39.0
240	TLK240-10-90D	10.5	39.0
	TLK240-12-90D	13.0	39.0
	TLK240-14-90D	15.0	39.0
	TLK240-16-90D	17.0	39.0
	TLK240-20-90D	21.0	39.0
300	TLK300-12-90D	13.0	43.0
	TLK300-14-90D	15.0	43.0
	TLK300-16-90D	17.0	43.0
	TLK300-20-90D	21.0	43.0
	400	TLK400-12-90D	13.0
TLK400-14-90D		15.0	49.0
TLK400-16-90D		17.0	49.0
TLK400-20-90D		21.0	49.0

COPPER TUBULAR LUGS (TLKF SERIES) 銅管單孔易進壓接端子			
mm <sup>2</sup>	ITEM NO.	d2	W
6	TLKF6-5	5.5	10.0
	TLKF6-6	6.4	12.0
	TLKF6-8	8.4	15.0
	TLKF6-10	10.5	17.0
	TLKF6-12	13.0	19.0
10	TLKF10-5	5.5	12.0
	TLKF10-6	6.4	12.0
	TLKF10-8	8.4	15.0
	TLKF10-10	10.5	17.0
	TLKF10-12	13.0	19.0
16	TLKF16-5	5.5	12.0
	TLKF16-6	6.4	12.0
	TLKF16-8	8.4	15.0
	TLKF16-10	10.5	17.0
	TLKF16-12	13.0	19.0
25	TLKF25-5	5.5	14.0
	TLKF25-6	6.4	14.0
	TLKF25-8	8.4	16.0
	TLKF25-10	10.5	18.0
	TLKF25-12	13.0	19.0
35	TLKF35-6	6.5	17.0
	TLKF35-8	8.5	17.0
	TLKF35-10	10.5	19.0
	TLKF35-12	13.0	21.0
	TLKF35-16	17.0	26.0
50	TLKF50-6	6.4	20.0
	TLKF50-8	8.4	20.0
	TLKF50-10	10.5	20.0
	TLKF50-12	13.0	23.0
	TLKF50-14	15.0	23.0
70	TLKF70-6	6.5	23.0
	TLKF70-8	8.4	23.0
	TLKF70-10	10.5	23.0
	TLKF70-12	13.0	23.0
	TLKF70-14	15.0	23.0
95	TLKF95-8	8.4	26.0
	TLKF95-10	10.5	26.0
	TLKF95-12	13.0	26.0
	TLKF95-14	15.0	26.0
	TLKF95-16	17.0	28.0
120	TLKF120-8	8.4	28.0
	TLKF120-10	10.5	28.0
	TLKF120-12	13.0	28.0
	TLKF120-14	15.0	28.0
	TLKF120-16	17.0	30.0
150	TLKF150-8	8.4	31.0
	TLKF150-10	10.5	31.0
	TLKF150-12	13.0	31.0
	TLKF150-14	15.0	31.0
	TLKF150-16	17.0	31.0

COPPER TUBULAR LUGS (TCLH SERIES) 銅管雙孔壓接端子			
mm <sup>2</sup>	ITEM NO.	2*d2	A
10	TCLH10-2A5	5.3	16.0
10	TCLH10-2A6	6.4	16.0
16	TCLH16-2A4	4.3	19.0
16	TCLH16-2A5	5.3	16.0
16	TCLH16-2A6	6.3	16.0
16	TCLH16-2B6	6.35	25.4
25	TCLH25-2A6	6.35	15.9
25	TCLH25-2A6.5	6.9	15.9
35	TCLH35-2A6.5	6.9	15.9
35	TCLH35-2B6.5	6.9	25.4
50	TCLH50-2A6	6.4	19.05
70	TCLH70-2A6	6.4	16.0
95	TCLH95-2A6	6.4	19.05

COPPER TUBULAR LUGS (TLAPH-2A SERIES) 銅管雙孔壓接端子(短管型)			
mm <sup>2</sup>	ITEM NO.	2*d2	A
38	TLAPH38-2A8	9.0	25.4
60	TLAPH60-2A10	11.0	25.4
80	TLAPH80-2A10	11.0	25.4
100	TLAPH100-2A10	11.0	25.4
125	TLAPH125-2A10	11.0	25.4
150	TLAPH150-2A10	11.0	25.4
180	TLAPH180-2A12	14.0	44.5
200	TLAPH200-2A12	14.0	44.5
250	TLAPH250-2A12	14.0	44.5
325	TLAPH325-2A12	14.0	44.5
400	TLAPH400-2A12	14.0	44.5
500	TLAPH500-2A12	14.0	44.5

TUBULAR LUGS (TCLH-2A-45D SERIES) 銅管雙孔45°壓接端子			
mm <sup>2</sup>	ITEM NO.	2*d2	A
25	TCLH25-2A6-45D	6.5	15.9

# CRIMPING TOOLS

## DELUXE RATCHET CRIMPING TOOL 壓接工具

### KST2000D-1322

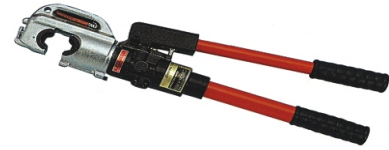
CRIMPING NON-INSULATED TERMINALS

1. 22-16 AWG (1.25mm<sup>2</sup>)
2. 16-14 AWG (2mm<sup>2</sup>)
3. 12-10 AWG (5.5mm<sup>2</sup>)
4. 8 AWG (8mm<sup>2</sup>)



### KSTP-300

FOR CRIMPING CONNECTOR UP TO 400mm<sup>2</sup>  
• 30mm JAW OPENING  
• FIBERGLASS HANDLES



### LY-2045C

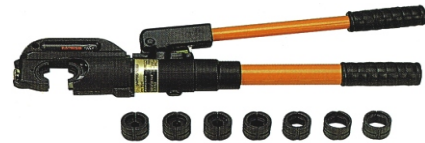
CRIMPING COPPER LUGS & NON-INSULATED TERMINALS

1. 22-16 AWG (1.25mm<sup>2</sup>)
2. 16-14 AWG (2mm<sup>2</sup>)
3. 12-10 AWG (5.5mm<sup>2</sup>)
4. 8 AWG (8mm<sup>2</sup>)



### KSTP-400


FOR CRIMPING CONNECTOR UP TO 400mm<sup>2</sup>  
• 38mm JAW OPENING  
• FIBERGLASS HANDLES



### LY-2045D

CRIMPING COPPER LUGS & NON-INSULATED TERMINALS

1. 22-16 AWG (1.25mm<sup>2</sup>)
2. 16-14 AWG (2mm<sup>2</sup>)
3. 12-10 AWG (5.5mm<sup>2</sup>)
4. 8 AWG (8mm<sup>2</sup>)
5. 6 AWG (14mm<sup>2</sup>)



### KST-HDC38B

HEAVY DUTY CRIMPING TOOL FOR COPPER TERMINALS, LUGS AND SPLICES  
DURABLE FOR:

INSULATED:  
5.5 / 8 / 14 / 22mm<sup>2</sup>  
(12-10 / 8 / 6 / 4 AWG)  
NON-INSULATED:  
8 / 14 / 22 / 38mm<sup>2</sup>  
(8 / 6 / 4 / 2 AWG)



### THX-185-HEAD(U) / (H)

FOR NON-INSULATED TERMINAL  
10 TO 185mm<sup>2</sup>




THX-185-HEAD(U) WITH INDENT DIES



THX-185-HEAD(H) WITH HEXAGONAL DIES

### CO-325A-HEAD

FOR NON-INSULATED TERMINAL  
8 TO 325mm<sup>2</sup>



### CTE-25AS


VOLTAGE 100V-200V / 50-60HZ  
ACCESSORY: WITH 2M HOSE WHICH CAN BE INCREASED LENGTH.

- LOW PRESSURE 200 cuin/min @ 0-200 PSI
- HIGH PRESSURE 20 cuin/min @ 200-10000 PSI




### CO-325B-HEAD

FOR NON-INSULATED TERMINAL  
8 TO 325mm<sup>2</sup>



### CO-400

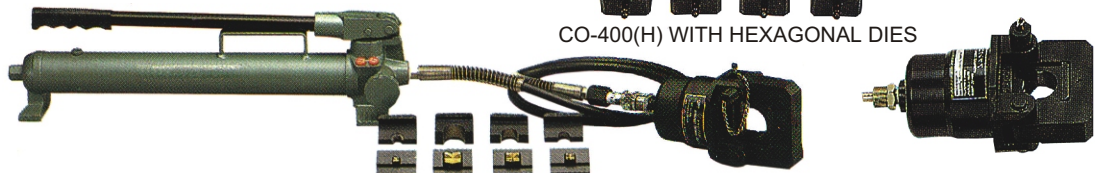HYDRAULIC CRIMPING TOOL FOR NON-INSULATED TERMINALS UP TO 400mm<sup>2</sup>



CO-400(H) WITH HEXAGONAL DIES

CO-400(U) WITH INDENT DIES

# TERMINALS

APPLICATION FIELD  
應用範圍

KS 健興 K.S. 健興 K.S. 健興



• **Solar Energy**  
太陽光電系統



• **Wind Power**  
風力發電



• **Transformer**  
變壓器設備



• **Distribution Box**  
控制配電箱



• **Transmission**  
輸配電工程



• **Electric Motor**  
機電馬達