



### Description

- Chassis:  
PCB mounted, from top
- Line filter in standard and medical version, 1-stage, standard attenuation
- For PCB mounting

### Approvals

- VDE License Number: 40004673
- UL License Number: E72928

### Characteristics

- Aluminum case provides good shielding  
Designed for standard applications
- Protection against interference voltage from the mains  
Possible interferences generated in the equipment are strongly attenuated
- Universal line filter for standard applications
- Qualified for use in equipment according IEC/EN 60950

### Other versions on request

- Medical version M80

### Weblinks

Approvals: <http://www.schurter.com/approvals>

RoHS: <http://www.schurter.com/rohs>


### Technical Data

Ratings IEC	2 - 16 A @ Ta 40 °C / 250 VAC; 50 Hz
Ratings UL/CSA	2 - 16 A @ Ta 40 °C / 125 VAC; 60 Hz
Leakage Current	standard < 0.5 mA (250 V / 60 Hz)
Dielectric Strength	> 1.7 kVDC between L-N > 2.7 kVDC between L/N-PE Test voltage (2 sec)
Allowable Operation Temp.	-25 °C to 100 °C
Climatic Category	25/100/21 acc. to, IEC 60068-1
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	For PCB mounting, tin-plated
Material: Housing	Aluminum

Line Filter	Standard and Medical Version, IEC 60939, IEC 60601-1, UL 1283, UL 544, EN 133 200, CSA C22.2 no. 8 <a href="#">Technical details</a>
MTBF	> 200'000 h acc. to MIL-HB-217 F


### Dimensions

#### Case 72

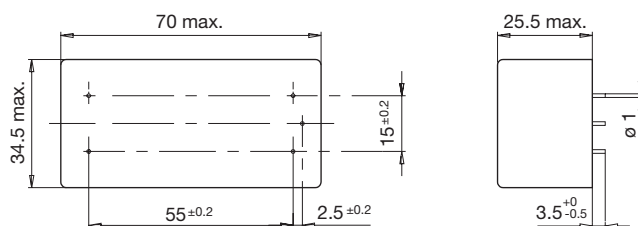

**Diagrams**

Standard version




- 1) Line
- 2) Load

**Attenuation loss**


- - - differential mode    \_\_\_\_\_ common mode

Standard version


2 A




4 A




6 A



10 A




16 A




Medical version (M5)


2 A




4 A




6 A



10 A



16 A



## Variants

Rated Current [A]	Filter-Type	L [mH]	Cx (X2) [nF]	Cy (Y2) [nF]	R [MΩ]	Weight [g]	Case	Order Number
2	Standard Version	2 x 8	100	4.7	1	114	72	5500.2021
4	Standard Version	2 x 3.5	100	4.7	1	114	72	5500.2022
6	Standard Version	2 x 1.8	100	4.7	1	115	72	5500.2023
10	Standard Version	2 x 0.82	100	4.7	1	115	72	5500.2024
16	Standard Version	2 x 0.65	100	4.7	1	115	72	5500.2025
2	Medical Version (M5)	2 x 8	100	-	1	114	72	5500.2106
4	Medical Version (M5)	2 x 3.5	100	-	1	114	72	5500.2107
6	Medical Version (M5)	2 x 1.8	100	-	1	115	72	5500.2108
10	Medical Version (M5)	2 x 0.82	100	-	1	115	72	5500.2109
16	Medical Version (M5)	2 x 0.65	100	-	1	115	72	5500.2110

Packaging unit 10 Pcs