



Coil former

Material: GFR 6-polyamide (UL 94 HB, insulation class to IEC 60085:
B \geq max. operating temperature 130 °C), color code natural
Solderability: to IEC 60068-2-20, test Ta, method 1 (aging 3): 235 °C, 2 s
Resistance to soldering heat: to IEC 60068-2-20, test Tb, method 1B: 350 °C, 3,5 s
Winding: see page 159

| Sections | A_N mm ² | l_N mm | A_R value $\mu\Omega$ | Pins | Ordering code |
|----------|--------------------------|-------------|----------------------------|------|-----------------|
| 1 | 177 | 87 | 17 | 10 | B66242-J1000-R1 |

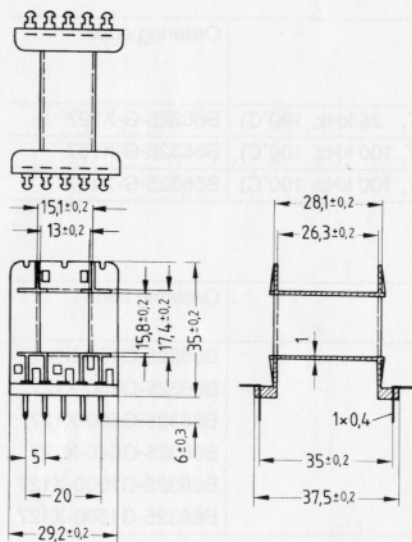

Hole arrangement
View in mounting direction