

3-phase inverter/PDS filtering

- 7 to 250A current ratings
 - 480V/50°C ratings for world compatibility and simple specification
 - slim book-style housing
 - designed for long cable lengths (50m/54yds+)
-
- Nennströme von 7 bis 250A
 - 480V/50°C für weltweite Kompatibilität und einfaches Spezifizieren
 - Schlankes Gehäuse in Buchform
 - Für lange Kabel (50m) ausgelegt
-
- courant de service de 7 et 250A
 - tension 480V (50°C) assurant une compatibilité internationale
 - boîtier vertical étroit taille réduite
 - conçu pour câbles de plus de 50m



Technical specifications

Maximum operating voltage: 480VAC @ 50°C for all standard types
 690VAC @ 50°C (HV-types) up to 130 A
 690VAC @ 50°C (HVIT-types) up to 130 A

Operating frequency: DC to 60Hz @ 50°C

Hipot test voltage: P ⇒ E 2900VDC; P ⇒ P 2800VDC

MTBF at 50°C, 400V per Mil-HB-217F: 220,000 hours

Protection category: IP20

Overload: 4 times rated current at switch on, then 1.5 times rated current for 1 minute, once per hour

Approvals

Standard types:



SL11
EN 133200



up to 180A



up to 180A
(except -180-07)

HV and HVIT types:



(600VAC)

Filter	Current ratings at 50°C (40°) A	Leakage current† (480V/50Hz) mA	Power loss W	Component values/phase					Connections input	Connections output		Weight kg
				ΣL mH	ΣCx μF	ΣCy μF	R1 MΩ	R2 MΩ				
FN 258 - 7 / ??	7 (8)	18.0	9	4.5	4	1.5	1.5	0.68	/29	/07	/29	1.1
FN 258 - 16 / ??	16 (18)	20.0	20	3.0	5.9	1.5	1.5	0.68	/29	/07	/29	1.7
FN 258 - 30 / ??	30 (34)	26.5	19	2.0	6.6	2.2	1.5	0.68	/33	/07	/33	1.8
FN 258 - 42 / ??	42 (47)	28.2	30	1.5	6.6	2.3	1.5	0.68	/33	/07	/33	2.8
FN 258 - 55 / ??	55 (62)	28.2	31	1.1	6.6	2.3	1.5	0.68	/34	/07	/34	3.1
FN 258 - 75 / ??	75 (85)	28.2	23	0.9	6.6	2.3	1.5	0.68	/34	-	/34	4
FN 258 - 100 / ??	100 (113)	28.2	41	0.9	6.6	2.3	1.5	0.68	/35	-	/35	5.5
FN 258 - 130 / ??	130 (145)	32.8	50	0.6	11	2.3	1.5	0.68	/35	-	/35	7.5
FN 258 - 180 / ??	180 (204)	32.8	68	0.13	11	2.3	1.5	0.68	/40	/07	/40	11
FN 258 - 250 / ??	250 (280)	32.8	75	0.13	26.4	2.3	1.5	0.68	/40	/07	/40	12

† Max. leakage under normal circumstances. Note: if two phases are interrupted, worst case leakage current could reach 5.6 times higher levels. Filters with lower leakage current (P [3.5mA] and L [0.8mA] types) are available on request.

Mechanical data


Current	-7	-16	-30	-42	-55	-75	-100	-130	-180	-250	Tol.* mm
A	255	305	335	329		329	379 ± 1.5	439 ± 1.5	438 ± 1.5	478 ± 1.5	±1
B	126 ± 0.8	142 ± 0.8	150 ± 1	185 ± 1		220		240			±1.5
C	50	55	60	70	80	80	90 ± 0.8	110 ± 0.8			±0.6
D	225 ± 0.8	275 ± 0.8	305	300		300	350 ± 1.2	400 ± 1.2		440 ± 1.2	±1
E	240	290	320	314		314	364	414	413	453	±0.5
F	25	30	35	45	55	55	65	80			±0.3
G	6.5										±0.2
H	300		400	500			500			±15	
J	1 ± 0.1		1.5			3		4			±0.2
L	9		12			15			±1		
O	M5			M6			M10			-	
P	AWG 16	AWG 14	AWG 10	AWG 8	AWG 6	50mm²		70mm²		-	

All dimensions in mm; 1 inch = 25.4mm

* Measurements share this common tolerance unless otherwise stated

Electrical schematic


See table for component values

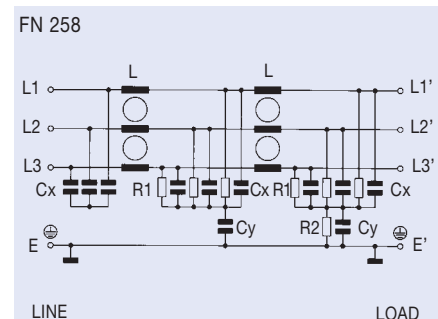


FN 258 insertion loss

Per CISPR 17; A = 50Ω/50Ω sym, B = 50Ω/50Ω asym, C = 0.1Ω/100Ω sym, D = 100Ω/0.1Ω sym


7 amp types

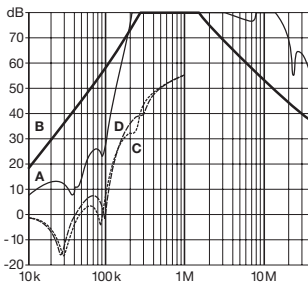


16 amp types

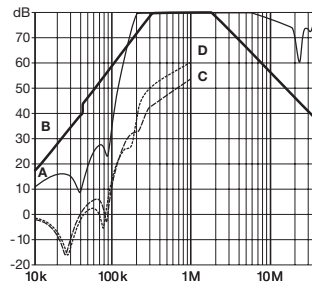


30 amp types

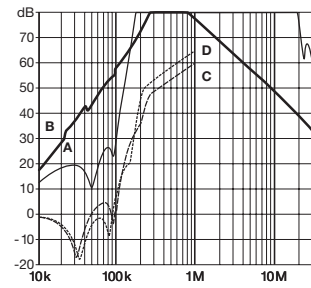


42 amp types

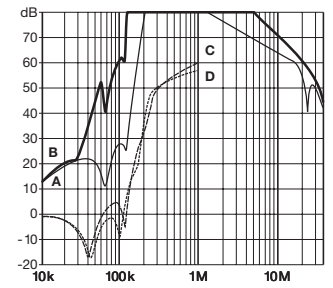


55 amp types

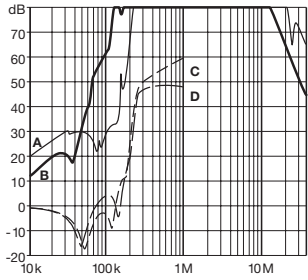


75 amp types

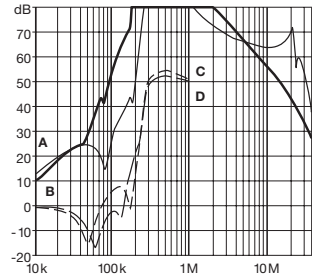


100 amp types

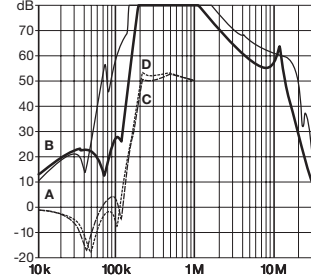


130 amp types

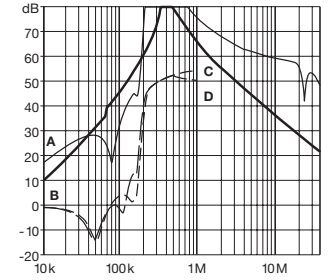

180 amp types

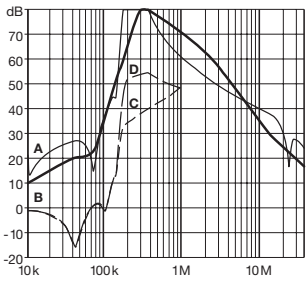

250 amp types

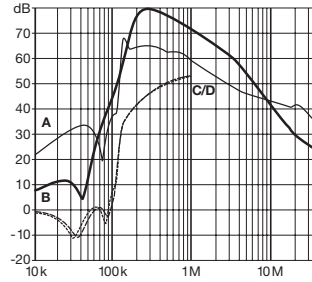


Note: the insertion loss values of the P and L types, as well as the HV and HVIT types, are not identical with those of the standard versions

Mechanical drawings


See mechanical data table for dimensions

BOTTOM VIEW


7 to 55A current ratings
/07 connection

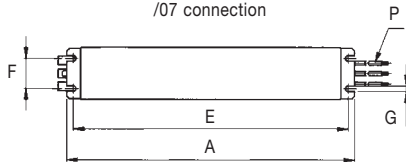

7 to 250A current ratings

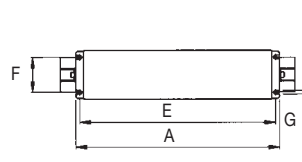

180A and 250A current rating
/07 connection

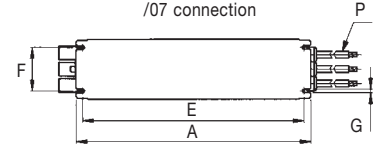

END/SIDE VIEW

