
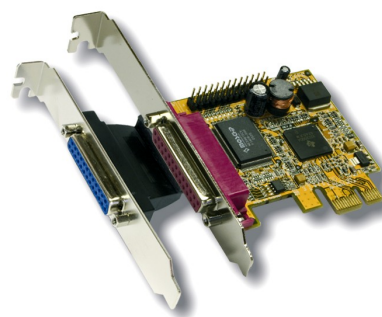


Anwendung/Application :

Operating System (OS):

Geprüft/Approved:

Verpackung/Packing:

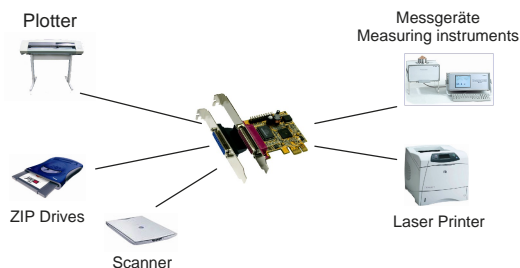

2P Parallel EPP/ECP PCI-Express Karte

Beschreibung :	<ul style="list-style-type: none"> Die EX-44012 PCI Express Parallel Karte stellt zwei Parallele EPP/ECP High Performance Ausgänge zur Verfügung. Er ist entwickelt worden um zwei weitere Parallele Ausgänge für PC's, kleine Workstations oder Server über den PCI Express Bus zu erweitern.
Merkmale :	<ul style="list-style-type: none"> Schnittstelle: EPP (Enhanced Parallel Port), ECP (Enhanced Capacity Port) I/O Adressen: wird vom Betriebs System vergeben Interrupt: wird vom System BIOS vergeben mit Interrupt Sharing PCI Express Schnittstelle kompatibel zu 1.0a Spezifikation
Chip-Set :	<ul style="list-style-type: none"> MosChip MCS9805
Datentransfer-Rate :	<ul style="list-style-type: none"> 2Mbyte/Sek.
Anschlüsse :	<ul style="list-style-type: none"> 1 x 25 Pin D-SUB Parallel Buchse 1 x 25 Pin D-SUB Parallel Buchse als Ableger Kabel
Hardwaresysteme :	<ul style="list-style-type: none"> PCI Express Slot x1 bis x16
Betriebstemperatur : Luftfeuchtigkeit :	<ul style="list-style-type: none"> 0 bis 55°C (32 bis 131°F) 5 bis 95%
Abmessung / Gewicht :	<ul style="list-style-type: none"> 70 x 66 mm / 150g
Lieferumfang :	<ul style="list-style-type: none"> EX-44012 1 x Slot Adapter mit 25 Pin Parallel Anschluss Treiber CD Handbuch



2P Parallel EPP/ECP PCI-Express card

Description :	<ul style="list-style-type: none"> The EX-44012 PCI Express parallel adapter provides 2 EPP/ECP high performance ports. It is designed for PC's, thin clients or server to provide instant LPT port expansion via the PCI Express Bus (PCIe). The card is fully PCI Express Plug-and-Play compatible and no IRQ and I/O address conflict problems.
Feature :	<ul style="list-style-type: none"> Interface: EPP (Enhanced Parallel Port), ECP (Enhanced Capacity Port) I/O addresses: Setting from the operating system Interrupt: Setting from the System BIOS with Interrupt Sharing PCI Express Interface: Fully compliant with PCI-Express Base Specification Revision 1.0a
Chip-Set :	<ul style="list-style-type: none"> MosChip MCS9805
Data transfer rate :	<ul style="list-style-type: none"> 2Mbyte/Sec.
Connectors :	<ul style="list-style-type: none"> 1 x 25 pin D-SUB parallel female connector 1 x 25 pin D-SUB parallel female connector with slot adapter
Hardware system :	<ul style="list-style-type: none"> 1 x PCI Express Slot x1 to x16
Operating Temperature : Humidity :	<ul style="list-style-type: none"> 0 to 55°C (32 to 131°F) 5 to 95%
Size / Weight :	<ul style="list-style-type: none"> 70 x 66 mm / 150g
Packaging contents :	<ul style="list-style-type: none"> EX-44012 1 x Slot adapter with 25 pin female connector Driver CD Manual