

PAGE 1/1

 ISSUE **03/06/15**

 SERIES **Flexible C/A**

 PART NUMBER **R285437000**

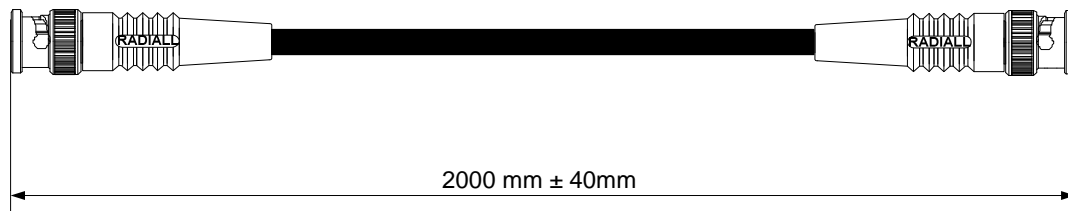
 CUSTOMER : **ALL**

SPECIFICATION :

-

ISSUE : -

DATE : -

All dimensions are in mm
For more details, please see connectors TDS

CONNECTORS DESIGNATION

 Connector 1: **R142085161 + boot**
BNC 75-COM Straight Plug
Nickel plated Brass
Torque wrench : NA

 Connector 2: **R142085161 + boot**
BNC 75-COM Straight Plug
Nickel plated Brass
Torque wrench : NA
CABLE DESIGNATION
Flexible cable 6/75 black
PROTECTIVE JACKET
N/A
OUTER DIAMETER
6,25 mm max
MARKING
N/A
ELECTRICAL CHARACTERISTICS

Characteristic impedance	75 Ohms
Frequency band :	DC - 1 GHz
Dielectric Withstanding Voltage:	1500 Veff mini
Voltage Rating:	500 Vrms maxi
Insulation Resistance	5000 Mohms mini

MECHANICAL CHARACTERISTICS

Min. Static bending radius :	30 mm
Life (Connectors) :	100 Cycles

ENVIRONMENTAL CHARACTERISTICS

Temperature range :	-35°C to +70 °C
---------------------	------------------------

In case of difference between the performances announced into the TDS and the customer specification, the TDS is the document of reference for the order.

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.