


KST™

Future Connection

**HEAT SHRINKABLE
TERMINALS
-- CRIMP TYPE &
SOLDERING TYPE**

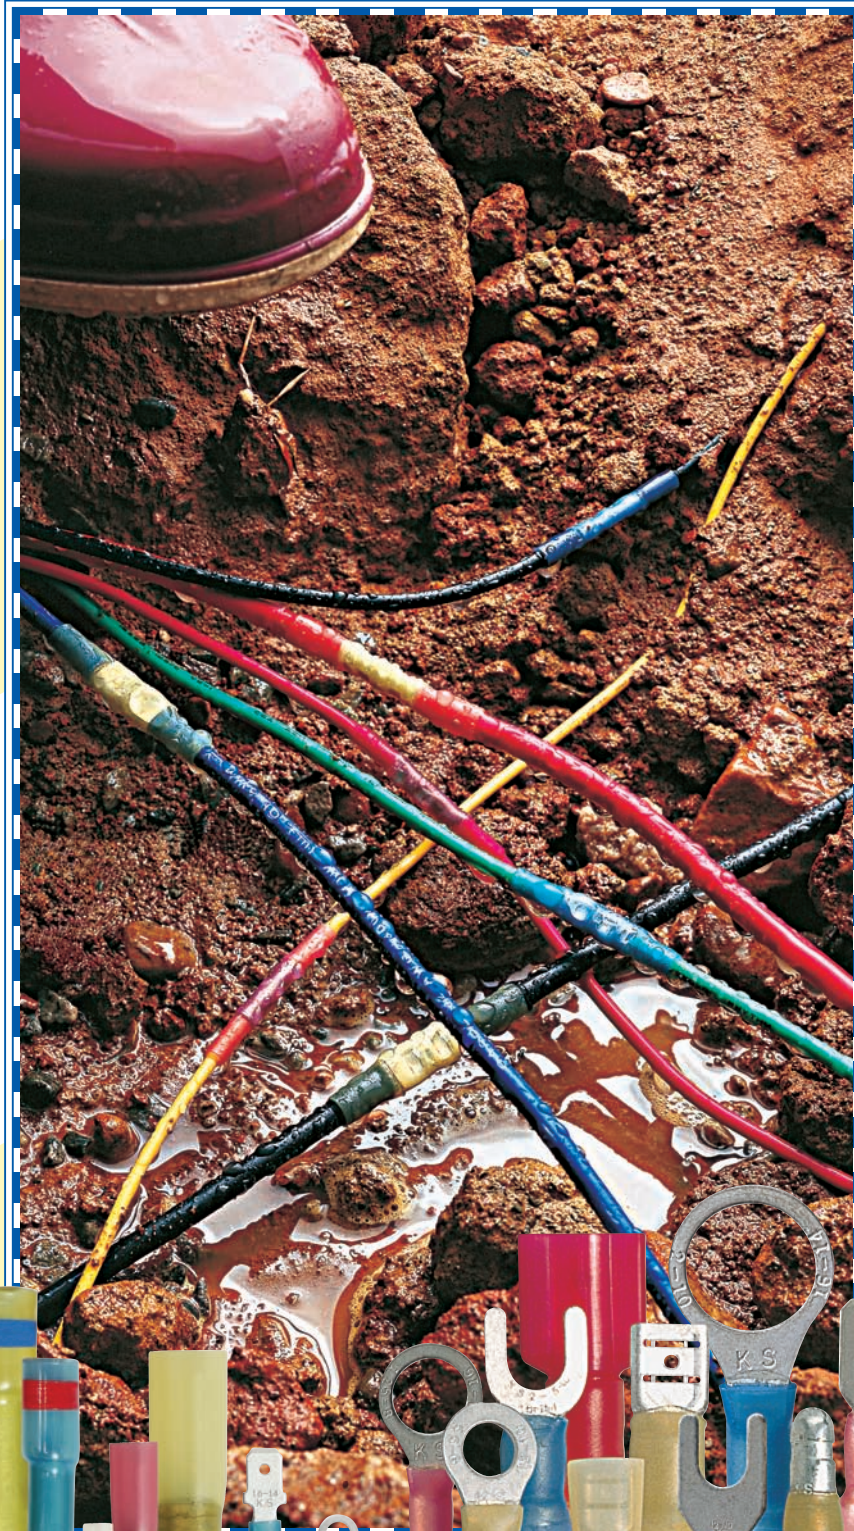

A. CRIMPING TYPE

PE-HEAT SHRINKABLE-RING / SPADE TERMINALS “HB” (BRAZED TYPE) _____	P1-2
PE-HEAT SHRINKABLE-MALE / FEMALE / FULLY FEMALE DISCONNECTORS “HD” (DOUBLE CRIMP TYPE) _____	P2
PE-HEAT SHRINKABLE-BULLET / FULLY NYLON BULLET / FULLY NYLON RECEPTACLE DISCONNECTORS “HD” (DOUBLE CRIMP TYPE) _____	P3
PE-HEAT SHRINKABLE-FULLY NYLON FEMALE / FULLY NYLON MALE DISCONNECTORS “H” (SINGLE CRIMP TYPE) _____	P3
PE-HEAT SHRINKABLE-BUTT SPLICE / CHANGING DOWN BUTT SPLICE CONNECTORS “HT” (TUBULAR TYPE) _____	P4
NYLON-HEAT SHRINKABLE-BUTT SPLICE / CHANGING DOWN BUTT SPLICE CONNECTORS “HT” (TUBULAR TYPE) _____	P4

B. SOLDERING TYPE


PE-INSULATED HEAT SHRINKABLE-RING TERMINALS “SH” (SOLDERING HEATSHRINKABLE) _____	P5
PE-INSULATED HEAT SHRINKABLE-FORK TERMINALS “SH” (SOLDERING HEATSHRINKABLE) _____	P5
PE-INSULATED HEAT SHRINKABLE-MALE / FEMALE DISCONNECTORS “SH” (SOLDERING HEATSHRINKABLE) _____	P6
NYLON-INSULATED HEAT SHRINKABLE-MALE / FEMALE DISCONNECTORS “SH” (SOLDERING HEATSHRINKABLE) _____	P6
PE-INSULATED HEAT SHRINKABLE-PARALLEL CONNECTORS “SHT” (TIN TUBULAR TYPE) _____	P7
NYLON-INSULATED HEAT SHRINKABLE-PARALLEL CONNECTORS “SHT” (TIN TUBULAR TYPE) _____	P7

PE-HEAT SHRINKABLE-RING TERMINALS “HB” (BRAZED TYPE)					
WIRE RANGE A.W.G. / MM ²	ITEM NO.	DIMENSION (mm)			INSULATED COLOR
		d2	W	L	
22-16 / 0.5-1.5	RHBS1-3.7	3.7	5.5	25.0	RED
	RHBL1-4	4.3	8.0	28.5	
	RHB1-5	5.3			
	RHB1-6	6.4	11.6	34.5	
	RHB1-8	8.4			
	RHB1-10	10.5	13.6	37.5	
16-14 / 1.5-2.5	RHBS2-3.7	3.7	6.6	26.5	BLUE
	RHBL2-4	4.3	8.5	30.5	
	RHBL2-5	5.3	9.5		
	RHB2-6	6.4	12.0	35.5	
	RHB2-8	8.4			
	RHB2-10	10.5	13.6	37.5	
12-10 / 4-6	RHBL5-4	4.3	9.5	34.2	YELLOW
	RHB5-5	5.3		34.0	
	RHB5-6	6.4	12.0	37.5	
	RHB5-8	8.4	15.0	42.0	
	RHB5-10	10.5			
	RHB5-12	13.0	19.2	46.5	
8 / 8	RHBS8-6	6.4	12.0	37.0	RED
	RHB8-8	8.4	15.0	43.0	
	RHB8-10	10.5			

PE-HEAT SHRINKABLE-RING TERMINALS “HD” (DOUBLE CRIMP TYPE)					
WIRE RANGE A.W.G. / MM ²	ITEM NO.	DIMENSION (mm)			INSULATED COLOR
		d2	W	L	
22-16 / 0.5-1.5	RHDS1-3.7	3.7	5.5	30.5	RED
	RHDL1-4	4.3	8.0	32.8	
	RHD1-5	5.3			
	RHD1-6	6.4	11.6	38.0	
	RHD1-8	8.4			
	RHD1-10	10.5	13.6	41.6	
16-14 / 1.5-2.5	RHDS2-3.7	3.7	6.6	31.0	BLUE
	RHDL2-4	4.3	8.5	32.8	
	RHDL2-5	5.3	9.5	31.8	
	RHD2-6	6.4	12.0	37.5	
	RHD2-8	8.4		36.0	
	RHD2-10	10.5	13.6	40.2	
12-10 / 4-6	RHDL5-4	4.3	9.5	36.8	YELLOW
	RHD5-5	5.3		39.4	
	RHD5-6	6.4	12.0	44.0	
	RHD5-8	8.4	15.0	44.0	
	RHD5-10	10.5			
	RHD5-12	13.0	19.2	49.2	


ⓘ Above terminals also available in NYLON material , item numbers please add suffix “ -NY ”.
 Example: RHBS1-3.7-NY

PE-HEAT SHRINKABLE-SPADE TERMINALS "HB" (BRAZED TYPE)

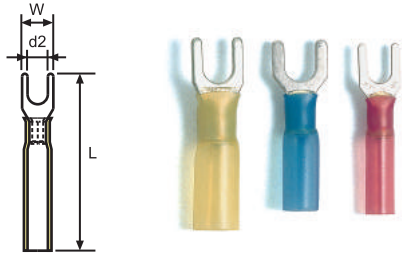

WIRE RANGE A.W.G. / MM ²	ITEM NO.	DIMENSION (mm)			INSULATED COLOR
		d2	W	L	
22-16 / 0.5-1.5	SHBL1-3.7	3.7	6.4	29.3	RED
	SHBM1-4	4.3	7.2	29.6	
	SHBL1-5	5.3	9.5	30.0	
16-14 / 1.5-2.5	SHBL2-3.7	3.7	6.0	28.5	BLUE
	SHBM2-4	4.3	7.2	29.5	
	SHBL2-5	5.3	9.3	30.5	
12-10 / 4-6	SHBL5-4	4.3	9.0	33.5	YELLOW
	SHB5-5	5.3			
	SHBL5-6	6.4			


PE-HEAT SHRINKABLE-SPADE TERMINALS "HD" (DOUBLE CRIMP TYPE)

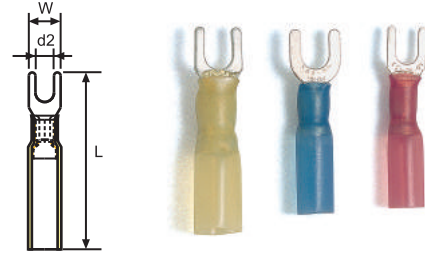

WIRE RANGE A.W.G. / MM ²	ITEM NO.	DIMENSION (mm)			INSULATED COLOR
		d2	W	L	
22-16 / 0.5-1.5	SHDL1-3.7	3.7	6.4	33.0	RED
	SHDM1-4	4.3	7.2		
	SHDL1-5	5.3	9.5		
16-14 / 1.5-2.5	SHDL2-3.7	3.7	6.0	33.5	BLUE
	SHDM2-4	4.3	7.2		
	SHDL2-5	5.3	9.3		
12-10 / 4-6	SHDL5-4	4.3	9.0	38.0	YELLOW
	SHD5-5	5.3			
	SHDL5-6	6.4			


⦿ Above terminals also available in NYLON material , item numbers please add suffix "-NY" . ⦿

PE-HEAT SHRINKABLE-FEMALE DISCONNECTS "HD" (DOUBLE CRIMP TYPE)




WIRE RANGE A.W.G. / MM ²	ITEM NO.	NEMA TAB IN mm	W	D	L	INSULATED COLOR
22-16 / 0.5-1.5	FDHD 1-250	.032 x .250 0.8 x 6.35	6.6	5.5	34.0	RED
16-14 / 1.5-2.5	FDHD 2-250			6.0		BLUE
12-10 / 4-6	FDHD 5-250			8.1	35.0	YELLOW

PE-HEAT SHRINKABLE-MALE DISCONNECTS "HD" (DOUBLE CRIMP TYPE)



WIRE RANGE A.W.G. / MM ²	ITEM NO.	NEMA TAB IN mm	W	D	L	INSULATED COLOR
22-16 / 0.5-1.5	MDHD 1-250	.032 x .250 0.8 x 6.35	6.35	5.5	34.0	RED
16-14 / 1.5-2.5	MDHD 2-250			6.0		BLUE
12-10 / 4-6	MDHD 5-250			8.1	35.0	YELLOW

PE-HEAT SHRINKABLE-FULLY INSULATED FEMALE DISCONNECTS "HD" (DOUBLE CRIMP TYPE)



WIRE RANGE A.W.G. / MM ²	ITEM NO.	NEMA TAB IN mm	W	D	L	INSULATED COLOR
22-16 / 0.5-1.5	FD FHD 1-250	.032 x .250 0.8 x 6.35	6.6	6.5	28.0	RED
16-14 / 1.5-2.5	FD FHD 2-250					BLUE
12-10 / 4-6	FD FHD 5-250			7.5		YELLOW