


# TMCM-110-42

**1-Axis  
Motor Mounted  
Controller / Driver  
1.1A / 34V**

**INFO** The TCMC-110-42 is an intelligent stepper motor controller and driver module to be mounted directly on a 42 mm flange motor. This module converts the motor into a compact mechatronic device with bus oriented or stand-alone control. The motor, switches, power and the multi purpose I/Os can be connected with small pluggable connectors. The TCMC-110-42 comes with the PC based software development environment TMCL-IDE for the Trinamic Motion Control Language (TMCL). Using predefined TMCL high level commands like „move to position“ or „constant rotation“ a rapid and fast development of motion control applications is guaranteed. The TCMC-110-42 can be controlled via an RS-232, RS-485, I2C or CAN interface. Communication traffic is kept very low since all time critical operations, e.g. ramp calculation are performed onboard. The TMCL program can be stored in the on board EEPROM for stand-alone operation. The firmware of the module can be updated via the serial interface. With the optional stallGuard™ feature it is possible to detect motor overload or motor stall.

### MAIN CHARACTERISTICS

- ELECTRICAL DATA**
  - up to 1.1A coil current RMS (1.5A peak)
  - 7V to 34V motor supply voltage
- SUPPORTED MOTORS**
  - two-phase bipolar motors with 0.3A to 1.1A coil current
- INTERFACE**
  - RS232, RS485, I<sup>2</sup>C or CAN 2.0b host interface
  - 2 inputs for reference and stop switches
  - 1 general purpose input and 1 output
- FEATURES**
  - up to 16 times microstepping
  - memory for 2048 TMCL commands
  - automatic ramp generation in hardware
  - on the fly alteration of motion parameters (e.g. position, velocity, acceleration)
  - stallGuard™ for sensorless motor stall detection
  - full step frequencies up to 20kHz
  - dynamic current control
  - TRINAMIC driver technology:
  - no heatsink required
- SOFTWARE**
  - stand-alone operation using TMCL or remote controlled operation
  - PC-based application development software TMCL-IDE included
- OTHER**
  - pluggable JST connectors
  - RoHS compliant
  - size: 42x42 mm<sup>2</sup>

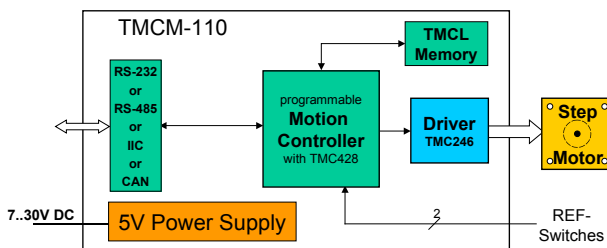

ORDER CODE	DESCRIPTION
<b>TMCM-110-42 (-option)</b>	1-axis controller / driver module 1.1A / 34V
<b>TMCM-110-CABLE</b>	Cable loom (3pcs)
<b>OPTIONS</b>	
<b>232</b>	RS-232 interface
<b>485</b>	RS-485 interface
<b>IIC</b>	I <sup>2</sup> C interface
<b>CAN</b>	CAN interface