

# Rectifier diode

SMAF 100 V



## FEATURES:

For surface mounted applications

Low profile package


Glass passivated chip junction

Easy to pick and place

Fast reverse recovery time

## SPECIFICATION:

Peak off-state voltage	100 V
Forward current	3 A
Recovery time	150 ns
Housing type	SMAF
Configuration	Single
Operating temperature	+55...+150 °C
Conducting-state voltage	1.3 V

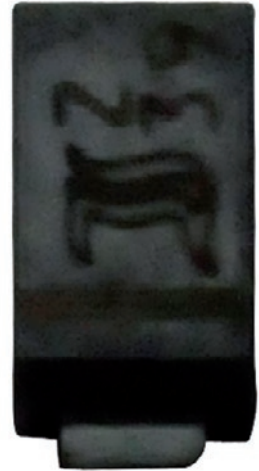

Art. Nr.

**RND RS3BCAT**

For more information and technical drawings, please contact us at [info@distrelec.com](mailto:info@distrelec.com).