


Multilayer Capacitors, SMD



Capacitor, 0805

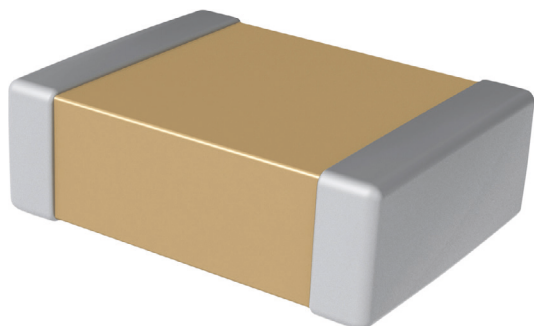

SPECIFICATION:

Construction form	0805
Ceramic type	X7R
Temperature range	-55...+125 °C
Length	2 mm
Width	1.25 mm

PRODUCT RANGE:

Art. Nr.	Capacitance	Rated voltage	Capacitance tolerance	Dimensions L x H x W	Height
RND1500805B101K201	100 pF	200 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B151K201	150 pF	200 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B221K500	220 pF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B221K101	220 pF	100 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B271K500	270 pF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B331K500	330 pF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B331K101	330 pF	100 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B391K500	390 pF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B471K500	470 pF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B471K101	470 pF	100 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B471K201	470 pF	200 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B561K500	560 pF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B681K500	680 pF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B681K101	680 pF	100 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B821K500	820 pF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B102J500	1 nF	50 VDC	±5%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B102K500	1 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B102K101	1 nF	100 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B102K201	1 nF	200 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B122K500	1.2 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B152K500	1.5 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B152K101	1.5 nF	100 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B182K500	1.8 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B222J500	2.2 nF	50 VDC	±5%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B222K500	2.2 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B222J101	2.2 nF	100 VDC	±5%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B222K101	2.2 nF	100 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B222K201	2.2 nF	200 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B272K500	2.7 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B332K500	3.3 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B332K201	3.3 nF	200 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm

Art. Nr.	Capacitance	Rated voltage	Capacitance tolerance	Dimensions L x H x W	Height
RND1500805B392K500	3.9 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B472J500	4.7 nF	50 VDC	±5%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B472K500	4.7 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B472K101	4.7 nF	100 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B562K500	5.6 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B682K500	6.8 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B682K101	6.8 nF	100 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B103J500	10 nF	50 VDC	±5%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B103K500	10 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B103K101	10 nF	100 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B103K201	10 nF	200 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B123K500	12 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B153K500	15 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B183K500	18 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B223J500	22 nF	50 VDC	±5%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B223K500	22 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B223K101	22 nF	100 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B223K201	22 nF	200 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B273K500	27 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B333K500	33 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B333K101	33 nF	100 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B393K500	39 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B473K160	47 nF	16 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B473K250	47 nF	25 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B473J500	47 nF	50 VDC	±5%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B473K500	47 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B473K101	47 nF	100 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B563K500	56 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B683K250	68 nF	25 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B683K500	68 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B823K500	82 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B104K160	100 nF	16 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B104K250	100 nF	25 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B104K500	100 nF	50 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B104J500	100 nF	50 VDC	±5%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B104K101	100 nF	100 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B124K160	120 nF	16 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B124K250	120 nF	25 VDC	±10%	2 x 0.8 x 1.25 mm	0.8 mm
RND1500805B154K160	150 nF	16 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B154K250	150 nF	25 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B184K250	180 nF	25 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B224K160	220 nF	16 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B224J250	220 nF	25 VDC	±5%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B224K250	220 nF	25 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B224K500	220 nF	50 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B274K160	270 nF	16 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B334K160	330 nF	16 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B334K250	330 nF	25 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B334K500	330 nF	50 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B394K160	390 nF	16 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B474K160	470 nF	16 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B474K250	470 nF	25 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B474K500	470 nF	50 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B105K100	1 µF	10 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B105K160	1 µF	16 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B105K250	1 µF	25 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B225K250	2.2 µF	25 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B475K100	4.7 µF	10 VDC	±10%	2 x 1.25 x 1.25 mm	1.25 mm

Art. Nr.	Capacitance	Rated voltage	Capacitance tolerance	Dimensions L x H x W	Height
RND1500805B475K160	4.7 μ F	16 VDC	\pm 10%	2 x 1.25 x 1.25 mm	1.25 mm
RND1500805B106K6R3	10 μ F	6.3 VDC	\pm 10%	2 x 1.25 x 1.25 mm	1.25 mm