

HF Connectors



Male Connector SMA 50 Ω, straight







SPECIFICATION:

Housing Material	Brass/Gold-plated
Series	SMA
Frequency	12.4 GHz
Gender	Male
Insulation material	Teflon
Impedance	50 Ω
CAT Catalogue Description 2	Crimp Ferrule - Brass, Gold-plated - Gasket - Silicone, Red - Washer - Stainless Steel
Connector Design	straight
Connection, attachment	Crimp 0.92 mm
Connection, shield	Crimp 5.5 mm
Cable type	RG-58U
Contacts	Brass/gold-plated

PRODUCT RANGE:

Art. Nr.

RND 205-00450

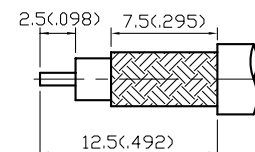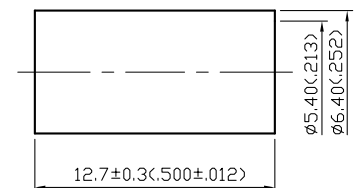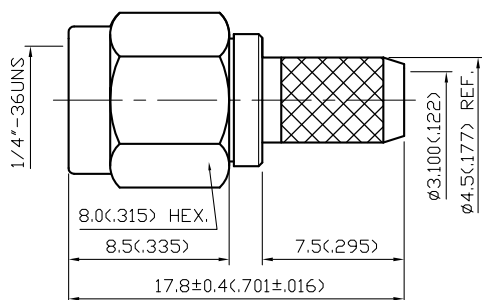

STRIPPING DIMENSION
SCALE 3:1