
HF Connectors



Male Connector SMA 50 Ω , angled

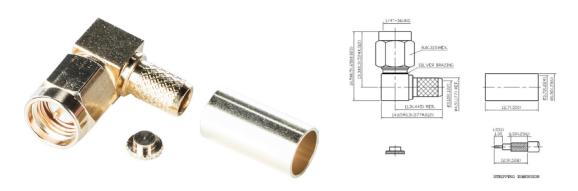

SPECIFICATION:

Housing Material	Brass/Gold-plated
Series	SMA
Frequency	12.4 GHz
Gender	Male
Insulation material	Teflon
Impedance	50 Ω
CAT Catalogue Description 2Crimp Ferrule - Brass, Gold-plated - Gasket – Silicone, Red - Washer - Stainless Steel - Cap - Brass, Gold-	
	plated
Connector Design	angled
Connection, attachment	Solder
Connection, shield	Crimp 5.6 mm
Cable type	RG-142U
Contacts	gold-plated

PRODUCT RANGE:

Art. Nr.

RND 205-00487

Distrelec Group AG, Grabenstrasse 6, 8606 Nänikon, Switzerland, T+41 44 944 99 11, info@distrelec.com, distrelec.com

Untitled-15 2 7/6/2016 10:57:00 AM