

# Power Strip

8x F (CEE 7/3), 3 m, CEE/Protective contact



Reconnectable with internal supply terminals  
Impact resistant and halogen-free case  
Flexible positioning in racks, rear walls and housing frame  
Fastening clips included


## SPECIFICATION:

No. of sockets	8
Socket type	F (CEE 7/3)
Plug version	2P+E
Colour	black
Cable length	3 m
Plug type	CEE/Protective contact
Rated output	4 kW
Load capacity	16 A/230 VAC
Dimensions L x W x H	434 x 44.4 x 44.45 mm
Socket arrangement	Diagonal
Connecting cable	H05VV-F, 3G 1.5 mm <sup>2</sup>
Material	Aluminium/Polypropylene
Assembly type	19" System
Mounting	Horizontal/Vertical



**Art. Nr.**

**RND 465-00211**

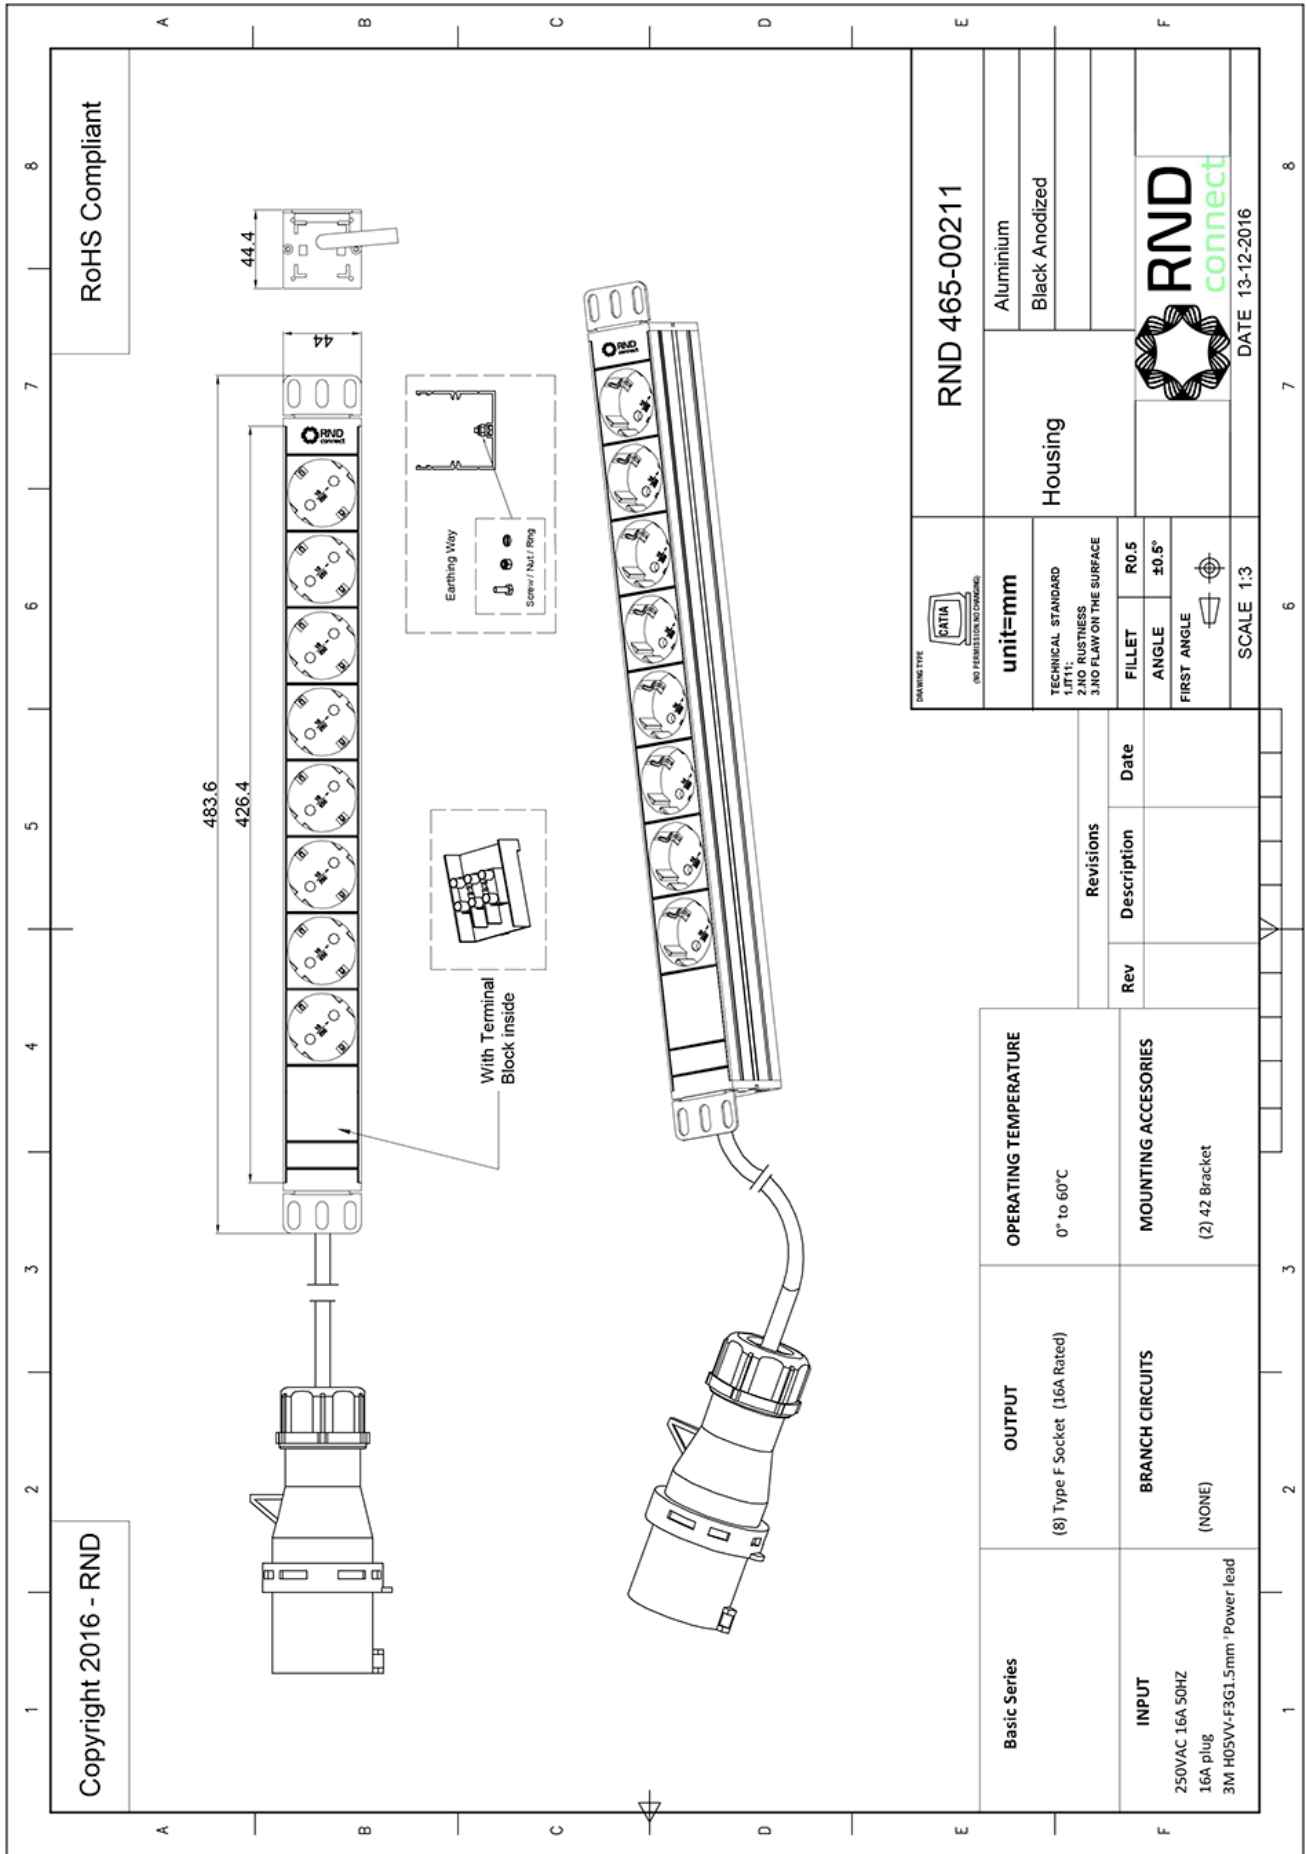

DRAWING TYPE RND / PERMISSION TO DRAWING	RND 465-00211	
	unit=mm	Housing
TECHNICAL STANDARD	Aluminium	
1. NO. RUSTINESS	Black Anodized	
2. NO. FLAW ON THE SURFACE		
3. NO. FLAW ON THE SURFACE		
FILLET	R0.5	
ANGLE	±0.5°	
FIRST ANGLE		
SCALE 1:3		DATE 13-12-2016

Revisions		
Rev	Description	Date

<b>Basic Series</b>	<b>OUTPUT</b>	<b>OPERATING TEMPERATURE</b>
	(8) Type F Socket (16A Rated)	0° to 60°C
<b>INPUT</b>	<b>BRANCH CIRCUITS</b>	<b>MOUNTING ACCESSORIES</b>
250VAC 16A 50HZ 16A plug 3M H05VV-F3G1.5mm Power lead	(NONE)	(2) 42 Bracket