

Power Strip

6xC19, 3 m, Type 23/Protective contact



Reconnectable with internal supply terminals
Impact resistant and halogen-free case
Flexible positioning in racks, rear walls and housing frame
Fastening clips included

SPECIFICATION:

No. of sockets	6
Socket type	C19
Colour	black
Cable length	3 m
Plug type	Type 23/Protective contact
Rated output	4 kW
Load capacity	16 A/230 VAC
Dimensions L x W x H	434 x 44.4 x 44.45 mm
Socket arrangement	Lengthwise
Connecting cable	H05VV-F. 3G 1.5 mm ²
Material	Aluminium/Polypropylene
Assembly type	19" System
Mounting	Horizontal/Vertical




Art. Nr.

RND 465-00226

Copyright 2016 - RND

RoHS Compliant

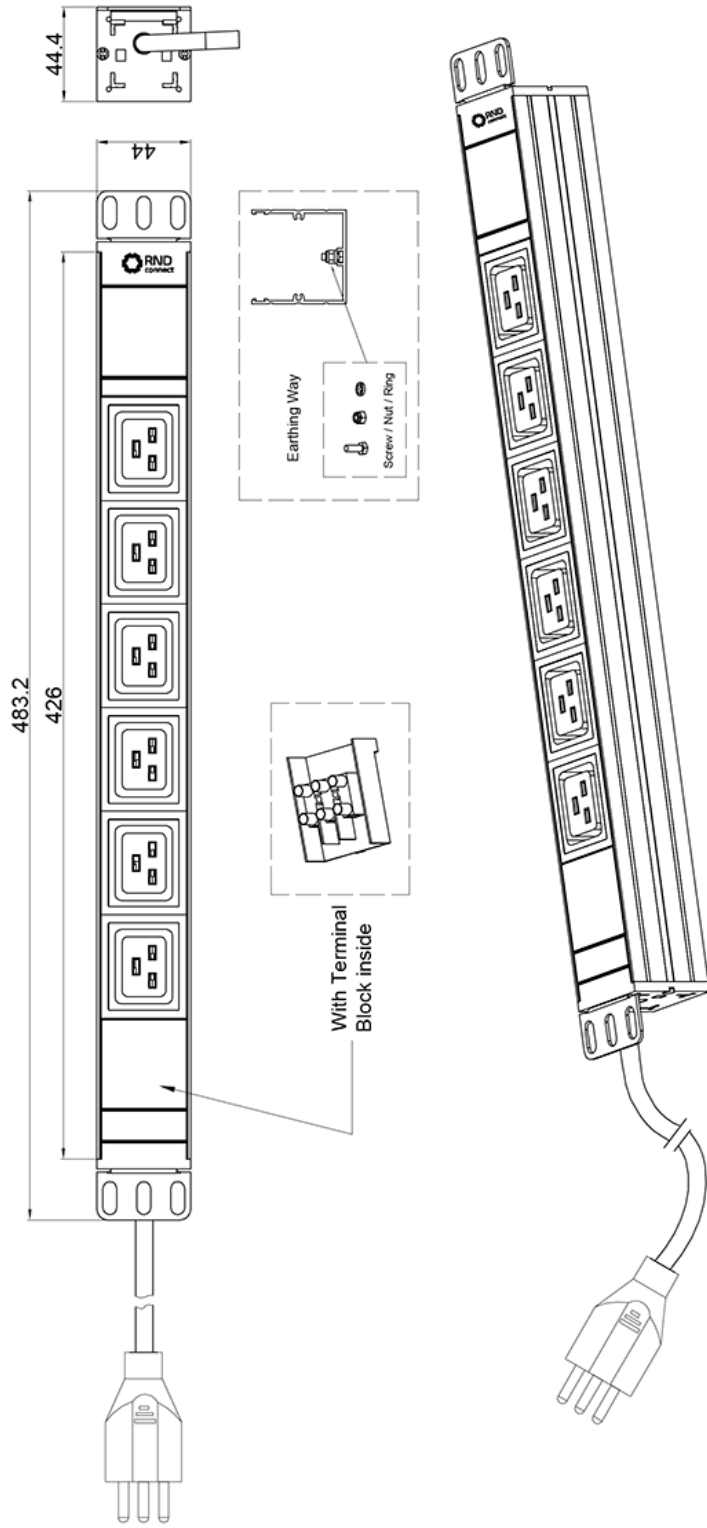

DRAWING TYPE CATIA (NO FEMERITION NO DRAWING)		RND 465-00226	
unit=mm		Aluminium Black Anodized	
TECHNICAL STANDARD 1. NO. RUSTINESS 2. NO. FLAW ON THE SURFACE 3. NO. FLAW ON THE SURFACE		Housing	
FILLET	R0.5		DATE 13-12-2016
ANGLE	±0.5°		
FIRST ANGLE			
SCALE 1:3			

Revisions			
Rev	Description	Date	

Basic Series	OUTPUT	OPERATING TEMPERATURE
	(6) IEC C19 In black (16A Socket)	0° to 60°C
INPUT	BRANCH CIRCUITS	MOUNTING ACCESSORIES
250VAC 16A 50HZ T23 plug 3M H05VV-F3G1.5mm Power lead	(NONE)	(2) 42 Bracket