

# Power Strip

6xC19, 3 m, C20/Protective contact



Reconnectable with internal supply terminals  
Impact resistant and halogen-free case  
Flexible positioning in racks, rear walls and housing frame  
Fastening clips included


## SPECIFICATION:

No. of sockets	6
Socket type	C19
Colour	black
Cable length	3 m
Plug type	C20/Protective contact
Rated output	4 kW
Load capacity	16 A/230 VAC
Dimensions L x W x H	434 x 44.4 x 44.45 mm
Socket arrangement	Lengthwise
Connecting cable	H05VV-F. 3G 1.5 mm <sup>2</sup>
Material	Aluminium/Polypropylene
Assembly type	19" System
Mounting	Horizontal/Vertical



**Art. Nr.**

**RND 465-00227**

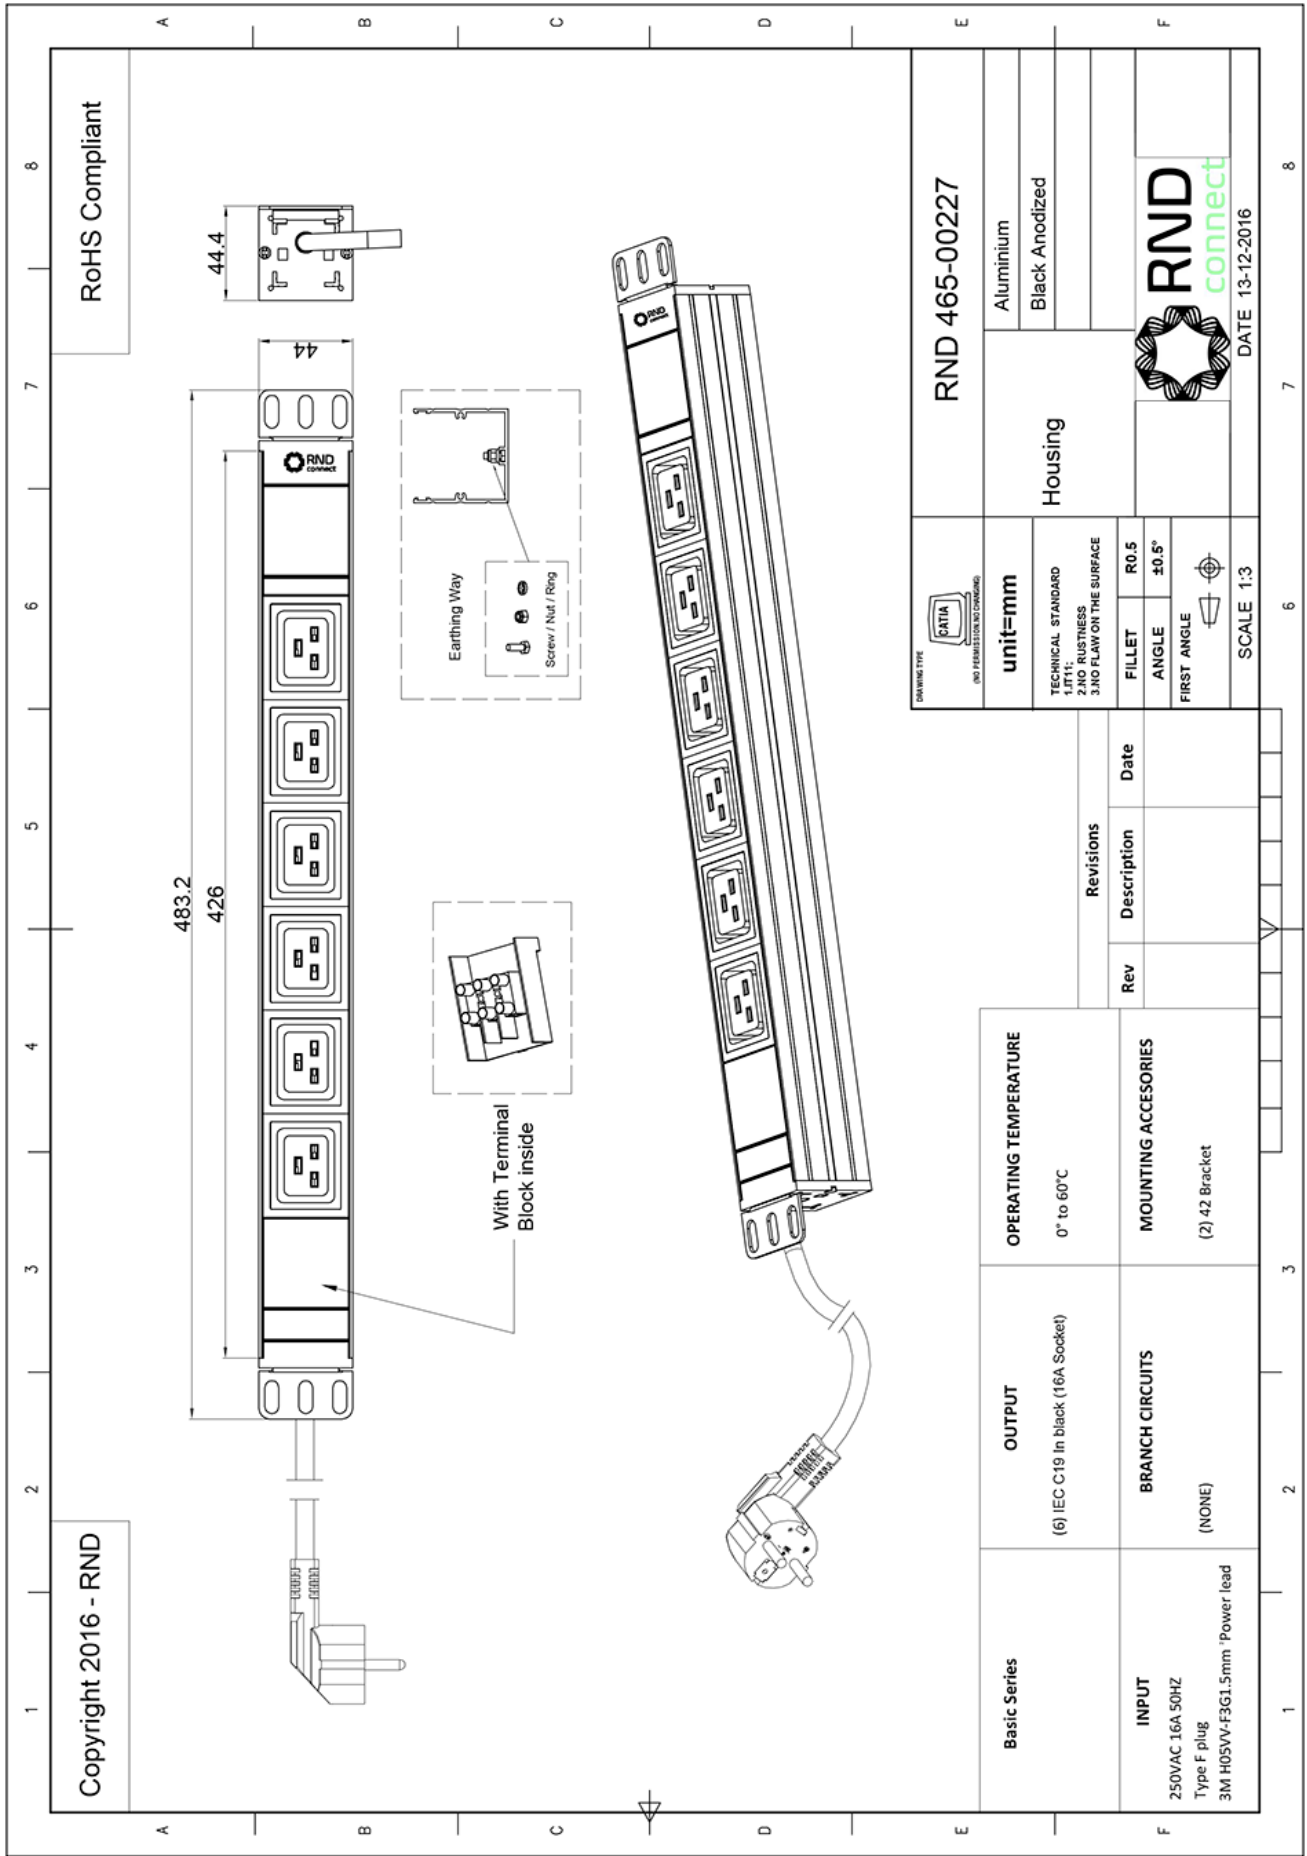

	<b>RND 465-00227</b>
<b>unit=mm</b>	Aluminium
TECHNICAL STANDARD 1. NO. RUSTINESS 2. NO. FLAW ON THE SURFACE 3. NO. FLAW ON THE SURFACE	Black Anodized
FILLET R0.5	
ANGLE ±0.5°	
FIRST ANGLE	
SCALE 1:3	
DATE 13-12-2016	

Revisions		
Rev	Description	Date

<b>Basic Series</b>	<b>OUTPUT</b>	<b>OPERATING TEMPERATURE</b>
INPUT 250VAC 16A 50HZ Type F plug 3M H05VV-F3G1.5mm Power lead	(6) IEC C19 In black (16A Socket)	0° to 60°C
	<b>BRANCH CIRCUITS</b>	<b>MOUNTING ACCESSORIES</b>
	(NONE)	(2) 42 Bracket