

# Power Strip

8xC19, 3 m, Type 23/Protective contact



Reconnectable with internal supply terminals  
Impact resistant and halogen-free case  
Flexible positioning in racks, rear walls and housing frame  
Fastening clips included

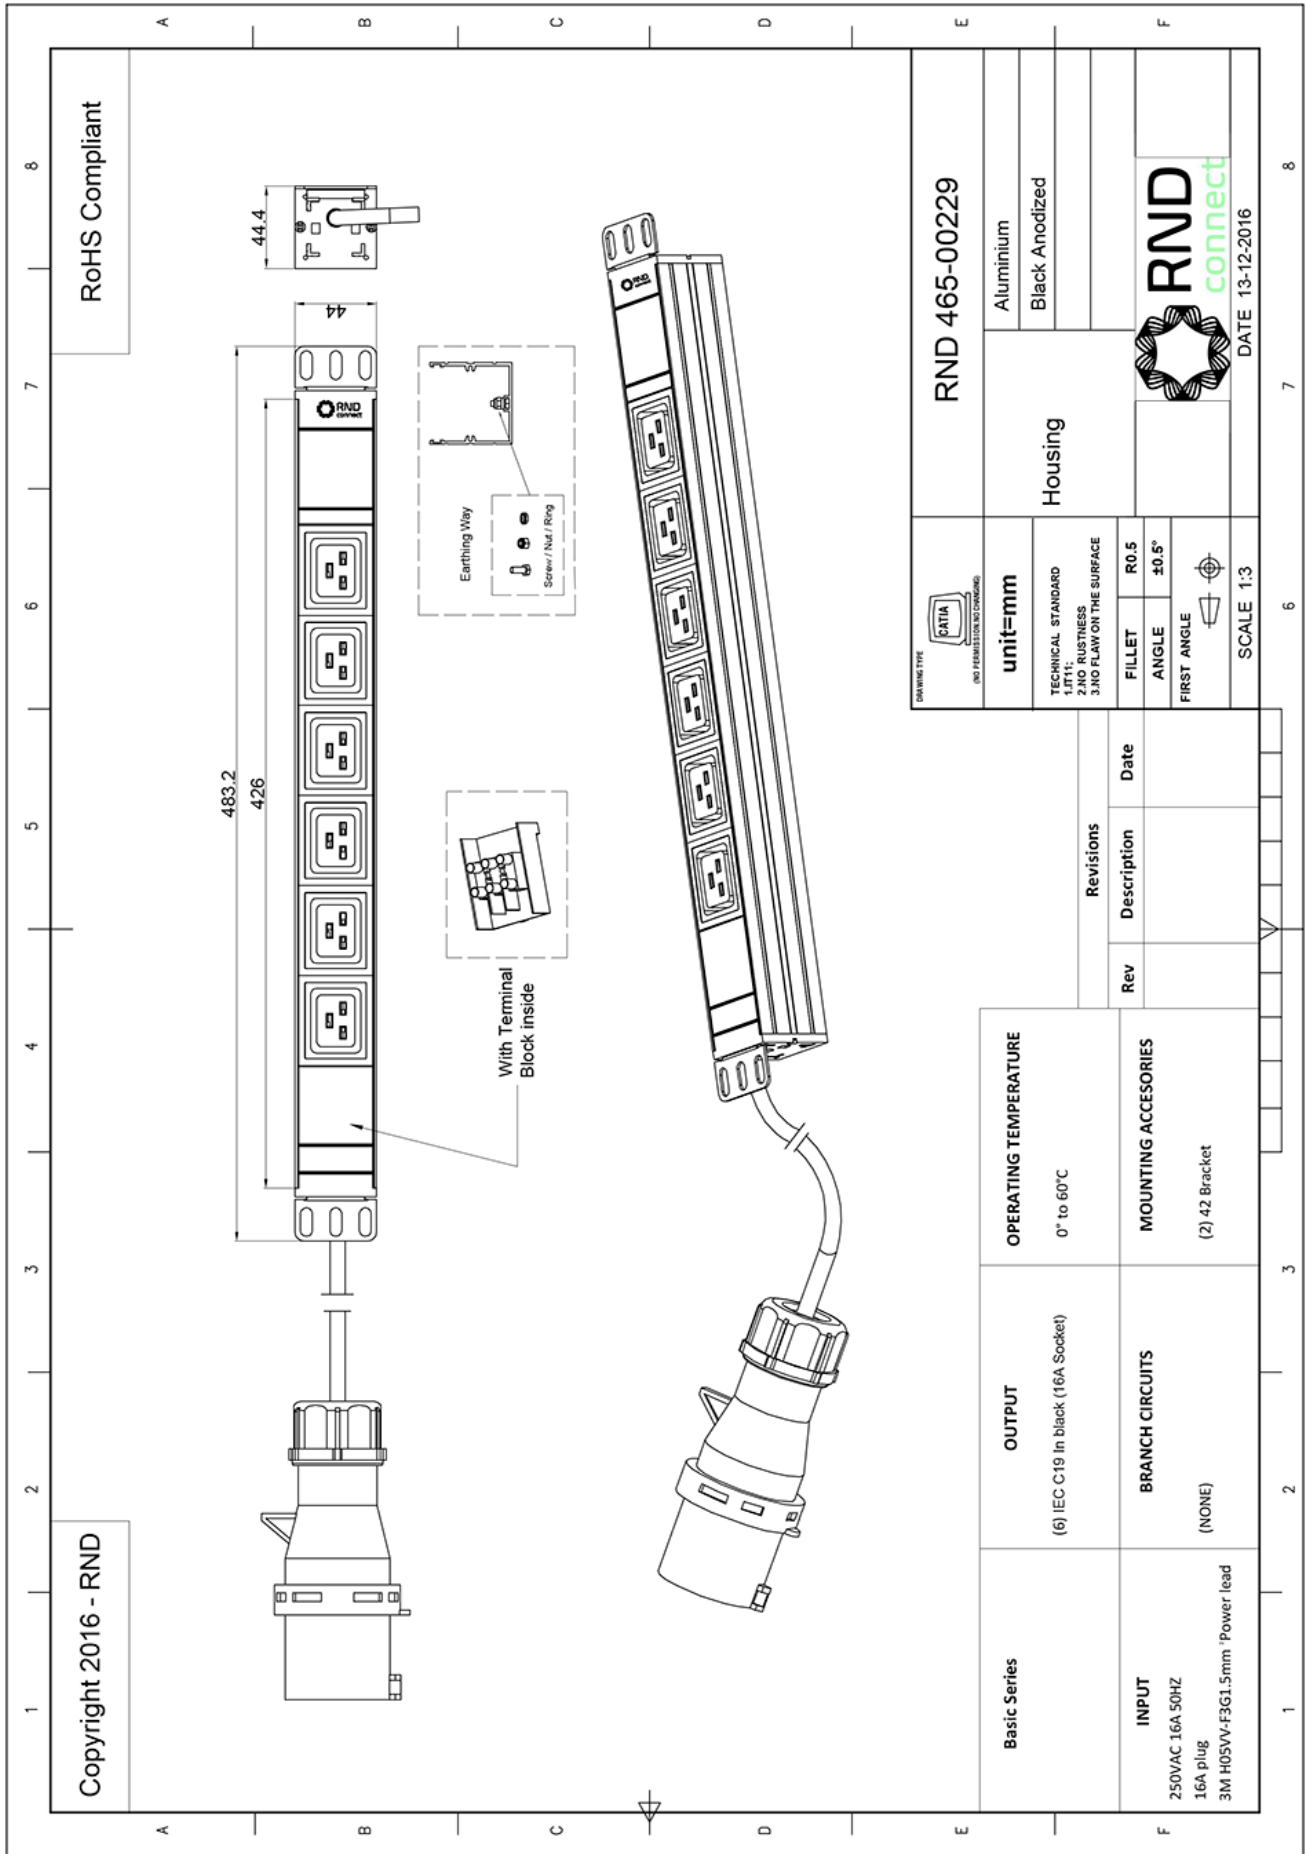
#### SPECIFICATION:



No. of sockets	8
Socket type	C19
Colour	black
Cable length	3 m
Plug type	Type 23/Protective contact
Rated output	4 kW
Load capacity	16 A/230 VAC
Dimensions L x W x H	435.8 x 44.4 x 44.45 mm
Socket arrangement	Lengthwise
Connecting cable	H05VV-F, 3G 1.5 mm <sup>2</sup>
Material	Aluminium/Polypropylene
Assembly type	19" System
Mounting	Horizontal/Vertical



**Art. Nr.**

**RND 465-00229**



DRAWING TYPE CATIA (NO / PERMISSION TO CHANGE)		RND 465-00229	
unit=mm		Aluminium Black Anodized	
TECHNICAL STANDARD 1. NO. RUSTINESS 2. NO. FLAW ON THE SURFACE 3. NO. FLAW ON THE SURFACE		Housing	
FILLET	R0.5	 <b>RND</b> connect DATE 13-12-2016	
ANGLE	±0.5°		
FIRST ANGLE			
SCALE 1:3		6	8

Revisions		
Rev	Description	Date

<b>Basic Series</b>	<b>OUTPUT</b>	<b>OPERATING TEMPERATURE</b>
INPUT 250VAC 16A 50HZ 16A plug 3M H05VV-F3G1.5mm Power lead	(6) IEC C19 In black (16A Socket)	0° to 60°C
<b>BRANCH CIRCUITS</b>	<b>MOUNTING ACCESSORIES</b>	
(NONE)	(2) 42 Bracket	