

# Pluggable Terminal Blocks

## 3.81 mm Pitch, Reversed



### FEATURES:

Reversed (Latches are on wire entry side)

Polarised mouldings

Guided pin alignment

Withstand Voltage - AC2000V/1min

Tin plated wire protector

Screw/Torque - M2 Steel, Tin plated 0.2Nm



### SPECIFICATION:

Gender of contacts	Female
Rated current to EN	8 A
Pitch	3.81 mm
Termination type	Screw Connection
Connection direction	vertical
Rated voltage to EN	125 V
Combustibility class	UL 94 V-0
Colour	green
Temperature range	-33...+120 °C
Cross-section max.	1.31 mm <sup>2</sup>
Cross-section min.	0.13 mm <sup>2</sup>
Connection cross-section	0.13-1.31 mm <sup>2</sup> (26-16AWG)



### PRODUCT RANGE:

Art. Nr.	Poles	A	Length
RND 205-00320	2	8.62 mm	8.62 mm
RND 205-00321	3	12.43 mm	12.43 mm
RND 205-00322	4	16.24 mm	16.24 mm
RND 205-00323	5	20.05 mm	20.05 mm
RND 205-00324	6	23.86 mm	23.86 mm
RND 205-00326	8	31.48 mm	31.48 mm
RND 205-00327	9	35.29 mm	35.29 mm

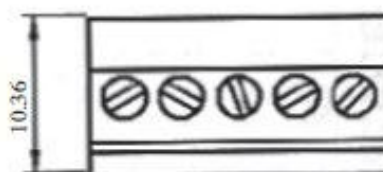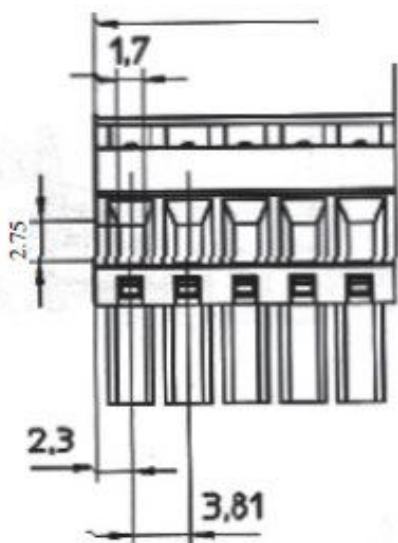

L= Length

