


Pluggable Terminal Blocks

5.08 mm Pitch, Reversed

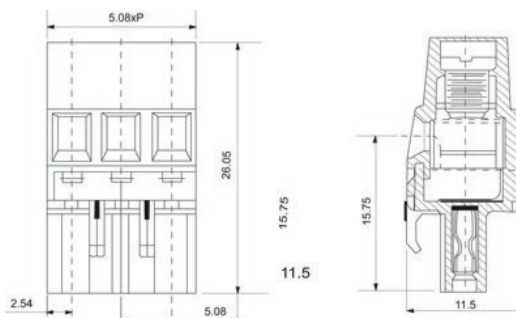

Reversed (Latches are on wire entry side)

Polarised Mouldings

Withstand Voltage - AC2000V/1Min

Guided pin alignment

SPECIFICATION:

Gender of contacts	Female
Rated current to EN	15 A
Pitch	5.08 mm
Component type	Wire socket straight
Termination type	Screw Connection
Connection direction	vertical
Rated voltage to EN	250 V
Combustibility class	UL 94 V-0
Colour	green
Temperature range	-33...+120 °C
Cross-section max.	2.0 mm ²
Cross-section min.	0.33 mm ²
Connection cross-section	0.33-2 mm ² (22-14AWG)

PRODUCT RANGE:

Art. Nr.	Poles	A	Length
RND 205-00375	2	10.2 mm	10.2 mm
RND 205-00376	3	15.2 mm	15.2 mm
RND 205-00377	4	20.3 mm	20.3 mm
RND 205-00378	5	25.4 mm	25.4 mm
RND 205-00379	6	30.5 mm	30.5 mm
RND 205-00381	8	40.6 mm	40.6 mm
RND 205-00382	9	45.7 mm	45.7 mm