


# Pluggable Terminal Blocks

Clamp Terminal 3.5 mm Pitch

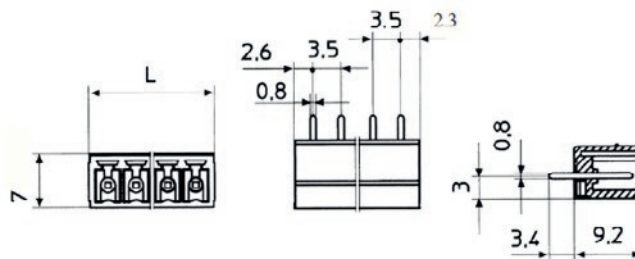

## FEATURES:

Closed ended

Closed headers

Polarised mouldings

Guided pin alignment

Pin/terminal - Tinned phosphor bronze

Rising clamp - Nickel copper flash brass

Screw/torque - M2 steel Tin plated, 0.3Nm

Recommended PCB hole size  $\varnothing 1.2$  mm

cUL approved

## SPECIFICATION:

Pitch	3.5 mm
Gender housing	Male
Termination type	Clamp Terminals/Screw Connection
Connection cross-section	0.13-1.3 mm <sup>2</sup> (26-16AWG)
Colour	green
Rated voltage to EN	200 V
Rated current to EN	10 A
Rated voltage to UL	200 V
Rated current to UL	10 A
Temperature range	-33...+120 °C

---

**PRODUCT RANGE:**

<b>Art. no.</b>	<b>Pole no.</b>	<b>Connection direction</b>
RND 205-00100	2	vertical
RND 205-00101	3	vertical
RND 205-00102	4	vertical
RND 205-00103	5	vertical
RND 205-00104	6	vertical
RND 205-00106	8	vertical
RND 205-00107	9	vertical
RND 205-00111	2	horizontal
RND 205-00112	3	horizontal
RND 205-00113	4	horizontal
RND 205-00114	5	horizontal
RND 205-00115	6	horizontal
RND 205-00117	8	horizontal
RND 205-00118	9	horizontal