


# Pluggable Terminal Blocks

Clamp Terminal 3.81 mm Pitch

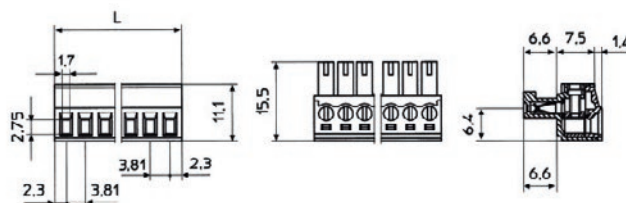

## FEATURES:

Closed headers

Polarised mouldings

Withstand Voltage - AC2000V/1min

Guided pin alignment

Tin plated wire protector

Screw/Torque - M2 Steel, Tin Plated 0.2Nm

Recommended PCB hole size  $\varnothing$ 1.4mm

cUL approved

## SPECIFICATION:

Pitch	3.81 mm
Gender housing	Female
Termination type	Clamp Terminals/Screw Connection
Connection cross-section	0.13-1.31 mm <sup>2</sup> (26-16AWG)
Colour	green
Rated voltage to EN	125 V
Rated current to EN	8 A
Rated voltage to UL	125 V
Rated current to UL	8 A
Temperature range	-33...+120 °C

## PRODUCT RANGE:

Art. no.	Pole no.
RND 205-00122	2
RND 205-00123	3
RND 205-00124	4
RND 205-00125	5
RND 205-00126	6
RND 205-00128	8
RND 205-00129	9