


Pluggable Terminal Blocks

Clamp Terminal 5 mm Pitch

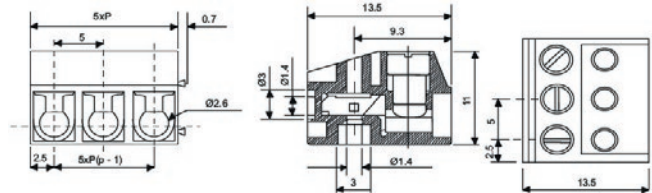

FEATURES:

- 2 & 3 pole interlocking
- Wire protector terminals
- Withstand Voltage - AC1500V/1min
- Tin plated brass terminal
- Tin plated copper wire protector
- Screw/Torque - M2.5 Steel, Nickel Plated 0.4Nm
- Guided pin alignment
- cUL approved

SPECIFICATION:

Pitch	5 mm
Gender housing	Male
Connection direction	vertical or 90°
Termination type	Clamp Terminals/Screw Connection
Connection cross-section	0.33-2 mm ² (22-14AWG)
Colour	black
Rated voltage to EN	250 V
Rated current to EN	10 A
Rated voltage to UL	250 V
Rated current to UL	10 A
Temperature range	-33...+120 °C

PRODUCT RANGE:

Art. no.	Pole no.
RND 205-00210	2
RND 205-00211	3
RND 205-00212	4
RND 205-00213	5
RND 205-00214	6
RND 205-00216	8
RND 205-00217	9