


# Pluggable Terminal Blocks

Clamp Terminal 3.81 mm Pitch

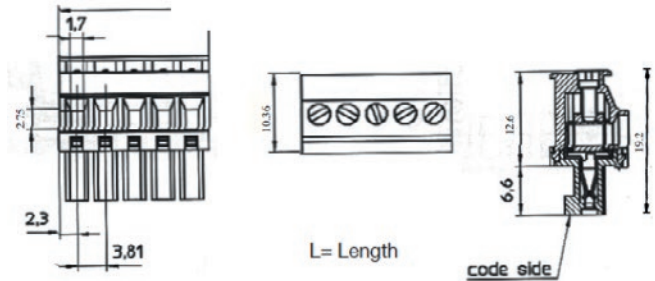

## FEATURES:

- Reversed
- Closed headers
- Polarised mouldings
- Guided pin alignment
- Withstand Voltage - AC2000V/1min
- Tin plated wire protector
- Screw/Torque - M2 Steel, Tin Plated 0.2Nm
- Recommended PCB hole size  $\varnothing 1.4\text{mm}$
- cUL approed

## SPECIFICATION:

Pitch	3.81 mm
Gender housing	Female
Connection direction	vertical
Termination type	Clamp Terminals/Screw Connection
Connection cross-section	0.13-1.31 mm <sup>2</sup> (26-16AWG)
Colour	green
Rated voltage to EN	125 V
Rated current to EN	8 A
Rated voltage to UL	125 V
Rated current to UL	8 A
Temperature range	-33...+120 °C

## PRODUCT RANGE:

Art. no.	Pole no.
RND 205-00320	2
RND 205-00321	3
RND 205-00322	4
RND 205-00323	5
RND 205-00324	6
RND 205-00326	8
RND 205-00327	9