


Pluggable Terminal Blocks

Clamp Terminal 5 mm Pitch

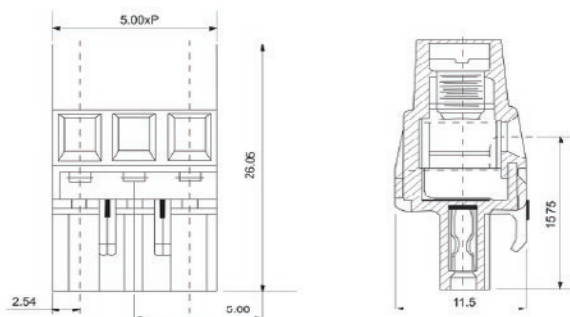

FEATURES:

Standard

Polarised mouldings

Guided pin alignment

Withstand Voltage - AC1500V/1min

cUL approved

SPECIFICATION:

Pitch	5 mm
Gender housing	Female
Connection direction	vertical
Termination type	Clamp Terminals/Screw Connection
Connection cross-section	2.5 mm ²
Colour	green
Rated voltage to EN	250 V
Rated current to EN	15 A
Rated voltage to UL	250 V
Rated current to UL	15 A
Temperature range	-33...+120 °C

PRODUCT RANGE:

Art. no.	Pole no.
RND 205-00331	2
RND 205-00332	3
RND 205-00333	4
RND 205-00334	5
RND 205-00335	6
RND 205-00337	8
RND 205-00338	9