


Pluggable Terminal Blocks

Clamp Terminal 5 mm Pitch

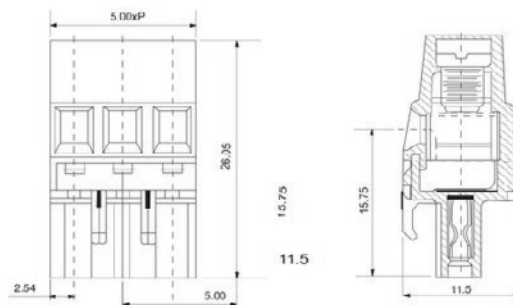

FEATURES:

Reversed

Polarised mouldings

Withstand Voltage - AC2000V/1Min

Guided pin alignment

cUL approved

SPECIFICATION:

Pitch	5 mm
Gender housing	Female
Connection direction	vertical
Termination type	Clamp Terminals/Screw Connection
Connection cross-section	2.5 mm ²
Colour	green
Rated voltage to EN	250 V
Rated current to EN	15 A
Rated voltage to UL	250 V
Rated current to UL	15 A
Temperature range	-33...+120 °C

PRODUCT RANGE:

Art. no.	Pole no.
RND 205-00342	2
RND 205-00343	3
RND 205-00344	4
RND 205-00345	5
RND 205-00346	6
RND 205-00348	8
RND 205-00349	9