

Accessories – Connectors

Connectors, 3-pin



05592043


- Used for mains/line voltage supplies
- Male connector with advanced earth protection contact (B)

Order Information

| Item | Description | Qty/PU | Part no. |
|------|---|--------|------------------|
| 1 | Male connector | 1 | 69001-651 |
| 2 | Female connector strip | 1 | 69001-652 |
| 3 | Mounting plate for fixing in subrack, socket terminal strip mounts on z-rail (with threaded holes to EN 60603, DIN 41612) | 1 | 30812-002 |


Technical data

| | |
|-----------------------------|--|
| Nominal current per contact | 10 A |
| Air gap | ≥ 4.4 mm |
| Creepage distance | ≥ 7.6 mm |
| Test voltage | 3 kV (eff) |
| Contact resistance | approx. 10 mΩ |
| Connection | solder eye connection up to 1 mm |
| Ambient temperature | 23 °C ... 130 °C |
| Contact pins, sockets | galvanically silver-plated |
| Housing material | Keripol red (type 802 in accordance with DIN 16911) |
| Flammability | UL 94-HB |

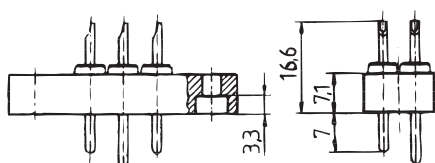


A4-5316

Dimensional drawing of multi-pin connector

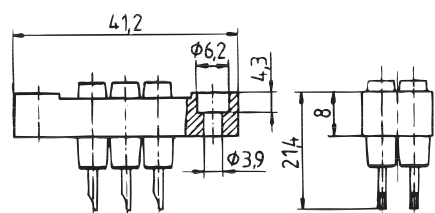


Dimensional drawing of socket terminal strip

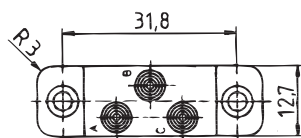

05009052

Dimension drawing of mounting plate



A4-2486a

3: Mounting plate

2: Socket terminal strip

A4-5317



For further information www.schroff.biz/oneclick
oneClick search code = Part no.