


OGU 005 P2K-TSSL Optical Label Sensor


- Metal casing
- Integrated electronic module
- Sensitivity adjustable
- High operating frequency
- Dark switching
- Bright ring LED
- High protection class
- 5-year warranty

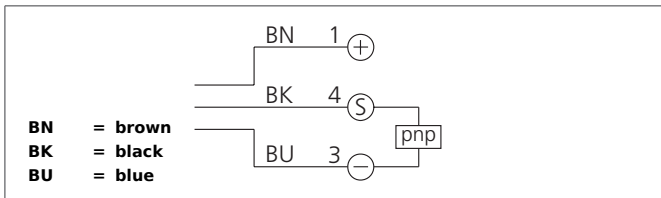

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.

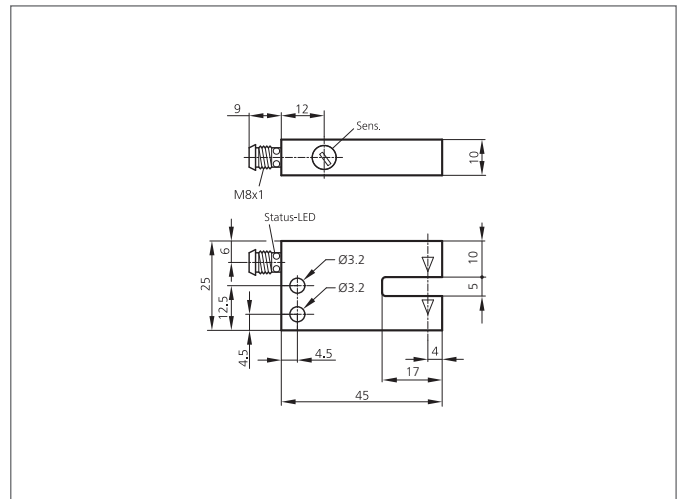

TECHNICAL INFORMATION (typ.)	+20°C, 24V DC
Operating principle	Optical
Evaluation	digital
Size	25 x 45 x 10 mm (Dimensions)
Design	fork
Fork opening	5 mm
Branch length inside	17 mm
Emitted light	Infrared, clocked
Service voltage	10 ... 35 V DC (Supply Class 2)
No-load current	< 35 mA
Resolution	Ø 0,5 mm
Sensitivity adjustment	potentiometer
Switching output	pnp, 200 mA, NO
Switching hysteresis	< 0,2 mm
Voltage drop	< 2,5 V
Switching frequency	1000 Hz
Reproducibility	0,01 mm
Ambient temperature, operation	-10 ... +60 °C
Ambient light immunity	20 kLx
Insulation voltage endurance	500 V
Protection class	IP 67
Protection degree	III, operation on protective low voltage
Casing material	Aluminium black anodized
Connection	Connector, M8, 3-poled

OGU 005 P2K-TSSL
Optical Label Sensor



TECHNICAL INFORMATION (typ.)

+20°C, 24V DC

Connecting cable

TK ...