


Male to Male Ø 4mm Stackable Safety Patchcord

4mm Stackable Safety Test Leads

Electro PJP – Standardised IEC 1010 Version


Photograph

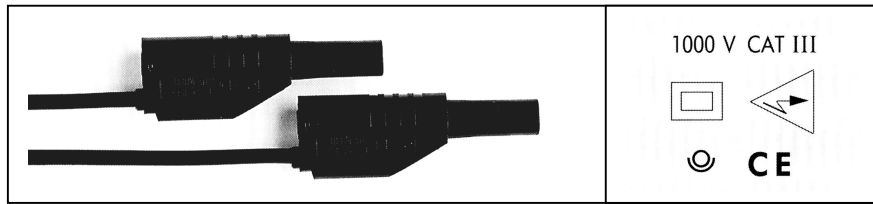

Specification

Cable insulation material	:	PVC
Connector insulation material	:	Polyamide
Connector contact material	:	Brass and bronze Ni
Cable cross sectional surface area	:	1.00mm ²
Voltage	:	1,000 V (Test 50/60 Hz 1mn > 7,400 V)
Maximum current	:	20 A
Overall contact resistance	:	25cm 12mΩ, 50cm 15mΩ, 100cm 20mΩ, 200cm 30mΩ
Temperature range	:	-20°C to +80°C

Technical Drawing

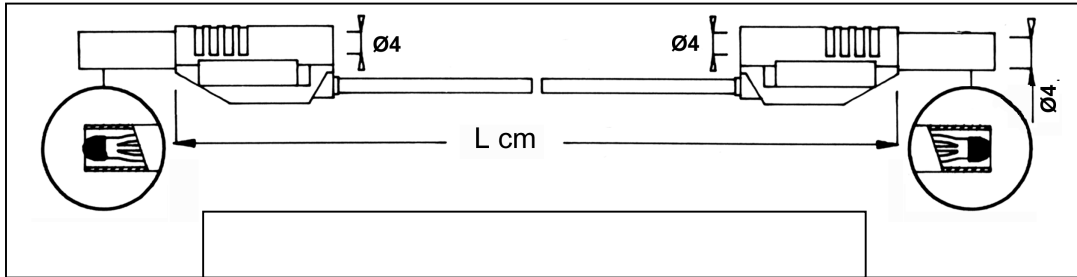

PJP Ref No.	Description	Length (cm)	Colour
2612-IEC-25-R	4mm Stackable Safety Test Lead	25	Red
2612-IEC-50-R	4mm Stackable Safety Test Lead	50	Red
2612-IEC-100-R	4mm Stackable Safety Test Lead	100	Red
2612-IEC-200-R	4mm Stackable Safety Test Lead	200	Red
2612-IEC-25-N	4mm Stackable Safety Test Lead	25	Black
2612-IEC-50-N	4mm Stackable Safety Test Lead	50	Black
2612-IEC-100-N	4mm Stackable Safety Test Lead	100	Black
2612-IEC-200-N	4mm Stackable Safety Test Lead	200	Black
2612-IEC-100-BI	4mm Stackable Safety Test Lead	100	Blue
2612-IEC-100-V	4mm Stackable Safety Test Lead	100	Green
2612-IEC-100-J	4mm Stackable Safety Test Lead	100	Yellow