
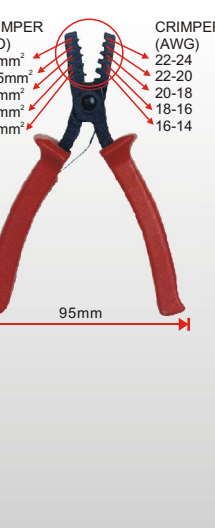




CRIMPING TOOL

 <p>CRIMPER (ISO) 0.1-0.25mm² CRIMPER (AWG) 24-30 18-22</p> <p>WITH SIX SECTIONS PRESSURE ADJUSTMENT</p> <p>PUSH TO RELEASE</p> <p>CLOSE TO RELEASE</p> <p>76mm</p> <p>203mm</p>	 <p>CRIMPER (ISO) 0.5-0.7mm² CRIMPER (AWG) 22-20 18-16 16-14 14-12 12-10</p> <p>WITH SIX SECTIONS PRESSURE ADJUSTMENT</p> <p>PUSH TO RELEASE</p> <p>CLOSE TO RELEASE</p> <p>76mm</p> <p>203mm</p>	 <p>CRIMPER (ISO) 6.0mm² CRIMPER (AWG) 12-10 8-6 6-4</p> <p>WITH SIX SECTIONS PRESSURE ADJUSTMENT</p> <p>PUSH TO RELEASE</p> <p>CLOSE TO RELEASE</p> <p>76mm</p> <p>203mm</p>	 <p>CRIMPER 6P6C 6P4C 6P2C</p> <p>CRIMPER 4P4C 4P2C</p> <p>STRIPPER</p> <p>CRIMPER 8P8C 8P6C 8P4C 8P2C</p> <p>CUTTER</p> <p>94mm</p> <p>208mm</p>																														
<p>YAC-4 D-SUB CONTACT CRIMPING TOOL</p> <table border="1"> <tr><td>CRIMPING</td><td>JIS SNCM21</td></tr> <tr><td>BODY</td><td>JIS G4051 S50C</td></tr> <tr><td>PLASTIC GRIP</td><td>30% GLASS FIBER REINFORCED NYLON 6</td></tr> <tr><td>CRIMPING SIZE</td><td>(ISO) 0.1-0.25mm², 0.5-1.0mm² (AWG) 24-30, 18-22</td></tr> </table>	CRIMPING	JIS SNCM21	BODY	JIS G4051 S50C	PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6	CRIMPING SIZE	(ISO) 0.1-0.25mm ² , 0.5-1.0mm ² (AWG) 24-30, 18-22	<p>YAC-5 CABLE FERRULES CRIMPING TOOL</p> <table border="1"> <tr><td>CRIMPING</td><td>JIS SNCM21</td></tr> <tr><td>BODY</td><td>JIS G4051 S50C</td></tr> <tr><td>PLASTIC GRIP</td><td>30% GLASS FIBER REINFORCED NYLON 6</td></tr> <tr><td>CRIMPING SIZE</td><td>(ISO) 0.5-0.75mm², 1.0-1.5mm², 2.5mm², 4mm², 6mm² (AWG) 22-20, 18-16, 16-14, 14-12, 12-10</td></tr> </table>	CRIMPING	JIS SNCM21	BODY	JIS G4051 S50C	PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6	CRIMPING SIZE	(ISO) 0.5-0.75mm ² , 1.0-1.5mm ² , 2.5mm ² , 4mm ² , 6mm ² (AWG) 22-20, 18-16, 16-14, 14-12, 12-10	<p>YAC-6 CABLE FERRULES CRIMPING TOOL</p> <table border="1"> <tr><td>CRIMPING</td><td>JIS SNCM21</td></tr> <tr><td>BODY</td><td>JIS G4051 S50C</td></tr> <tr><td>PLASTIC GRIP</td><td>30% GLASS FIBER REINFORCED NYLON 6</td></tr> <tr><td>CRIMPING SIZE</td><td>(ISO) 6mm², 10mm², 16mm² (AWG) 12-10, 8-6, 6-4</td></tr> </table>	CRIMPING	JIS SNCM21	BODY	JIS G4051 S50C	PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6	CRIMPING SIZE	(ISO) 6mm ² , 10mm ² , 16mm ² (AWG) 12-10, 8-6, 6-4	<p>YTT-02 MODULAR CONNECTOR CRIMPING TOOL</p> <table border="1"> <tr><td colspan="2">STRIPPING BLADES & CRIMPING</td></tr> <tr><td>STEEL BODY</td><td>30% GLASS FIBER REINFORCED NYLON 6</td></tr> <tr><td>SPECIFICATION</td><td>4P4C, 4P2C, 6P6C, 6P4C, 6P2C, 8P8C, 8P6C, 8P4C, 8P2C PLUGS</td></tr> </table>	STRIPPING BLADES & CRIMPING		STEEL BODY	30% GLASS FIBER REINFORCED NYLON 6	SPECIFICATION	4P4C, 4P2C, 6P6C, 6P4C, 6P2C, 8P8C, 8P6C, 8P4C, 8P2C PLUGS
CRIMPING	JIS SNCM21																																
BODY	JIS G4051 S50C																																
PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6																																
CRIMPING SIZE	(ISO) 0.1-0.25mm ² , 0.5-1.0mm ² (AWG) 24-30, 18-22																																
CRIMPING	JIS SNCM21																																
BODY	JIS G4051 S50C																																
PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6																																
CRIMPING SIZE	(ISO) 0.5-0.75mm ² , 1.0-1.5mm ² , 2.5mm ² , 4mm ² , 6mm ² (AWG) 22-20, 18-16, 16-14, 14-12, 12-10																																
CRIMPING	JIS SNCM21																																
BODY	JIS G4051 S50C																																
PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6																																
CRIMPING SIZE	(ISO) 6mm ² , 10mm ² , 16mm ² (AWG) 12-10, 8-6, 6-4																																
STRIPPING BLADES & CRIMPING																																	
STEEL BODY	30% GLASS FIBER REINFORCED NYLON 6																																
SPECIFICATION	4P4C, 4P2C, 6P6C, 6P4C, 6P2C, 8P8C, 8P6C, 8P4C, 8P2C PLUGS																																

 <p>CRIMPER (ISO) 0.75mm² CRIMPER (AWG) 22-10 18-16 16-14</p> <p>CRIMPER (ISO) 4.0mm² CRIMPER (AWG) 14-12 12-10 10-8</p> <p>180mm</p> <p>100mm</p>	 <p>CRIMPER (ISO) 0.5mm² CRIMPER (AWG) 22-24 22-20 20-18 18-16 16-14</p> <p>CRIMPER (ISO) 0.75mm² CRIMPER (AWG) 22-20 20-18 18-16 16-14</p> <p>CRIMPER (ISO) 1.0mm² CRIMPER (AWG) 20-18 18-16 16-14</p> <p>CRIMPER (ISO) 1.5mm² CRIMPER (AWG) 18-16 16-14</p> <p>CRIMPER (ISO) 2.5mm² CRIMPER (AWG) 16-14</p> <p>150mm</p> <p>95mm</p>	 <p>CRIMPER FOR CABLE FERRULES</p> <p>CRIMPER (ISO) 0.08-6.0mm² CRIMPER (AWG) 28-10</p> <p>PRESSURE ADJUSTMENT (WITH SIX SECTIONS)</p> <p>PUSH TO RELEASE</p> <p>175mm (7")</p> <p>80mm (3 1/8")</p>	 <p>CRIMPER FOR CABLE FERRULES</p> <p>CRIMPER (ISO) 0.08-5.0mm² CRIMPER (AWG) 28-10</p> <p>PRESSURE ADJUSTMENT (WITH SIX SECTIONS)</p> <p>PUSH TO RELEASE</p> <p>175mm (7")</p> <p>80mm (3 1/8")</p>																																								
<p>YYT-21 CRIMPING PLIER FOR CABLE FERRULES</p> <table border="1"> <tr><td>CRIMPING</td><td>JIS SNCM21</td></tr> <tr><td>BODY</td><td>JIS G4051 S50C</td></tr> <tr><td>PLASTIC GRIP</td><td>PVC</td></tr> <tr><td>CRIMPING SIZE</td><td>(ISO) 0.75mm², 1.5mm², 2.5mm², 4.0mm², 6.0mm², 10.0mm² (AWG) 22-20, 18-16, 16-14, 14-12, 12-10, 10-8</td></tr> </table>	CRIMPING	JIS SNCM21	BODY	JIS G4051 S50C	PLASTIC GRIP	PVC	CRIMPING SIZE	(ISO) 0.75mm ² , 1.5mm ² , 2.5mm ² , 4.0mm ² , 6.0mm ² , 10.0mm ² (AWG) 22-20, 18-16, 16-14, 14-12, 12-10, 10-8	<p>YYT-22 CRIMPING PLIER FOR CABLE FERRULES</p> <table border="1"> <tr><td>CRIMPING</td><td>JIS SNCM21</td></tr> <tr><td>BODY</td><td>JIS G4051 S50C</td></tr> <tr><td>PLASTIC GRIP</td><td>PVC</td></tr> <tr><td>CRIMPING SIZE</td><td>(ISO) 0.5mm², 0.75mm², 1.0mm², 1.5mm², 2.5mm² (AWG) 24-22, 22-20, 20-18, 18-16, 16-14</td></tr> </table>	CRIMPING	JIS SNCM21	BODY	JIS G4051 S50C	PLASTIC GRIP	PVC	CRIMPING SIZE	(ISO) 0.5mm ² , 0.75mm ² , 1.0mm ² , 1.5mm ² , 2.5mm ² (AWG) 24-22, 22-20, 20-18, 18-16, 16-14	<p>YAC-8 CABLE FERRULES CRIMPING TOOL</p> <table border="1"> <tr><td>CRIMPING</td><td>JIS SNCM 21</td></tr> <tr><td>HANDLE</td><td>JIS G4051 S50C</td></tr> <tr><td>PLASTIC GRIP</td><td>30% GLASS FIBER REINFORCED NYLON 6</td></tr> <tr><td>CRIMPING SIZE</td><td>(ISO) 0.08-6.0mm² (AWG) 28-10</td></tr> <tr><td>LENGTH</td><td>175mm (7")</td></tr> <tr><td>WIDTH</td><td>80mm (3 1/8")</td></tr> </table>	CRIMPING	JIS SNCM 21	HANDLE	JIS G4051 S50C	PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6	CRIMPING SIZE	(ISO) 0.08-6.0mm ² (AWG) 28-10	LENGTH	175mm (7")	WIDTH	80mm (3 1/8")	<p>YAC-9 CABLE FERRULES CRIMPING TOOL</p> <table border="1"> <tr><td>CRIMPING</td><td>JIS SNCM 21</td></tr> <tr><td>HANDLE</td><td>JIS G4051 S50C</td></tr> <tr><td>PLASTIC GRIP</td><td>30% GLASS FIBER REINFORCED NYLON 6</td></tr> <tr><td>CRIMPING SIZE</td><td>(ISO) 0.08-5.0mm² (AWG) 28-10</td></tr> <tr><td>LENGTH</td><td>175mm (7")</td></tr> <tr><td>WIDTH</td><td>80mm (3 1/8")</td></tr> </table>	CRIMPING	JIS SNCM 21	HANDLE	JIS G4051 S50C	PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6	CRIMPING SIZE	(ISO) 0.08-5.0mm ² (AWG) 28-10	LENGTH	175mm (7")	WIDTH	80mm (3 1/8")
CRIMPING	JIS SNCM21																																										
BODY	JIS G4051 S50C																																										
PLASTIC GRIP	PVC																																										
CRIMPING SIZE	(ISO) 0.75mm ² , 1.5mm ² , 2.5mm ² , 4.0mm ² , 6.0mm ² , 10.0mm ² (AWG) 22-20, 18-16, 16-14, 14-12, 12-10, 10-8																																										
CRIMPING	JIS SNCM21																																										
BODY	JIS G4051 S50C																																										
PLASTIC GRIP	PVC																																										
CRIMPING SIZE	(ISO) 0.5mm ² , 0.75mm ² , 1.0mm ² , 1.5mm ² , 2.5mm ² (AWG) 24-22, 22-20, 20-18, 18-16, 16-14																																										
CRIMPING	JIS SNCM 21																																										
HANDLE	JIS G4051 S50C																																										
PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6																																										
CRIMPING SIZE	(ISO) 0.08-6.0mm ² (AWG) 28-10																																										
LENGTH	175mm (7")																																										
WIDTH	80mm (3 1/8")																																										
CRIMPING	JIS SNCM 21																																										
HANDLE	JIS G4051 S50C																																										
PLASTIC GRIP	30% GLASS FIBER REINFORCED NYLON 6																																										
CRIMPING SIZE	(ISO) 0.08-5.0mm ² (AWG) 28-10																																										
LENGTH	175mm (7")																																										
WIDTH	80mm (3 1/8")																																										

PROFESSIONAL CRIMPING TOOL RATCHET TYPE



HT-533FM
(Frame Only)
9.4" (239mm)

HT-336FM
(Frame Only) 8.7" (220mm)

Die sets are interchangeable, except HT-311M, HT-301X and HT-301



ITEM NO.	HT-301	HT-236H	HT-5332H	HT-236W	HT-5332W
DESCRIPTION	 ※with HT-336FM				
DIE ITEM NO.	HT-301 DIE is unchangeable	HT-236H DIE	HT-5332H DIE	HT-236W DIE	HT-5332W DIE
Specifications	AWG 22-18/16-14/12-10 DIN 0.5-1.0/1.5-2.5/4-6 mm ²	AWG 22-18/16-14/12-10 DIN 0.5-1.0/1.5-2.5/4-6 mm ²		AWG 22-18/16-14/12-10 DIN 0.5-1.0/1.5-2.5/4-6 mm ²	
Crimping cable size	Insulated Terminal 	Insulated Terminal 		Insulated Terminal 	

ITEM NO.	HT-236R	HT-5332R	HT-236F	HT-5332F	HT-236F1	HT-5332F1
DESCRIPTION						
DIE ITEM NO.	HT-236R DIE	HT-5332R DIE	HT-236F DIE	HT-5332F DIE	HT-236F1 DIE	HT-5332F1 DIE
Specifications	AWG 22-18/16-14/12-10 JIS 1.25/2.0/5.5 mm ²		AWG 22-18/16-14 DIN 0.5-1.0/1.5-2.5 mm ²		AWG 22-18/16-14 DIN 0.5-1.0/1.5-2.5 mm ²	
Crimping cable size	Vinyl Insulated w/o Copper Sleeve 		Insulated Flag Terminal 		Non-Insulated Flag Terminal 	

PROFESSIONAL CRIMPING TOOL RATCHET TYPE

ITEM NO.	HT-236E	HT-5332E	HT-236E1	HT-5332E1	HT-236E2	HT-5332E2	HT-236E3	HT-5332E3
DESCRIPTION								
DIE ITEM NO.	HT-236E DIE	HT-5332E DIE	HT-236E1 DIE	HT-5332E1 DIE	HT-236E2 DIE	HT-5332E2 DIE	HT-236E3 DIE	HT-5332E3 DIE
Specifications	AWG 22/20/18/16/14/12 JIS 0.5/0.75/1.0/1.5/2.5/4 mm ²		AWG 10/8/6 DIN 6/10/16 mm ²		AWG 22/20/18/16/14/12/10/8/6 DIN 0.5/0.75/1.0/1.5/2.5/4/6/10/ 16 mm ²		AWG 22/20/18/16/14/12/10 DIN 0.5/0.75/1.0/1.5/2.5/4/6 mm ²	
Crimping cable size	Pin Terminal Insulated or Non-Insulated Ferrules		Pin Terminal Insulated or Non-Insulated Ferrules		Terminal Insulated or Non-Insulated Ferrules		Terminal Insulated or Non-Insulated Ferrules	


ITEM NO.	HT-5335D	HT-5335D1	HT-5335D2
DESCRIPTION			
DIE ITEM NO.	HT-5335D DIE	HT-5335D1 DIE	HT-5335D2 DIE
Specifications	AWG 4/2/6 DIN 25/35/16 mm ²	AWG 4/1 DIN 25/50 mm ²	AWG 6/4/2 DIN 16/25/35 mm ²
Crimping cable size	Pin Terminal Insulated or Non-Insulated Ferrules	Pin Terminal Insulated or Non-Insulated Ferrules	Pin Terminal Insulated or Non-Insulated Ferrules

ITEM NO.	HT-236U	HT-5332U	HT-236C	HT-5332C	HT-236N	HT-5332N
DESCRIPTION						
DIE ITEM NO.	HT-236U DIE	HT-5332U DIE	HT-236C DIE	HT-5332C DIE	HT-236N DIE	HT-5332N DIE
Specifications	AWG 14-22 DIN 2.5-0.5 mm ²	AWG 20-18/16-14/12-10 DIN 0.5-1/1.5-2.5/4-6 mm ²	AWG 20-18/16-14/12-10 DIN 0.5-1/1.5-2.5/4-6 mm ²	AWG 20-18/16-14/12-10/8 DIN 1.5/2.5/6/10 mm ² JIS 1.25/2.0/5.5/8mm ²	AWG 20-18/16-14/12-10/8 DIN 1.5/2.5/6/10 mm ² JIS 1.25/2.0/5.5/8mm ²	AWG 20-18/16-14/12-10/8 DIN 1.5/2.5/6/10 mm ² JIS 1.25/2.0/5.5/8mm ²
Crimping cable size	Non-Insulated, Open Barrel & D-sub, V.35 Terminal	Non-Insulated Terminal or Open Barrel Terminal	Non-Insulated Terminal or Open Barrel Terminal	Non-Insulated Terminal	Non-Insulated Terminal	Non-Insulated Terminal

TERMINAL CRIMPING TOOL



Crimper made of carbon steel and hardened.

ITEM NO.	Crimping insulated terminal size			
HT-303 Economic Type	AWG mm ²	Red	Blue	Yellow
		22-18	16-14	12-10
		0.5-1	1.5-2.5	4-6

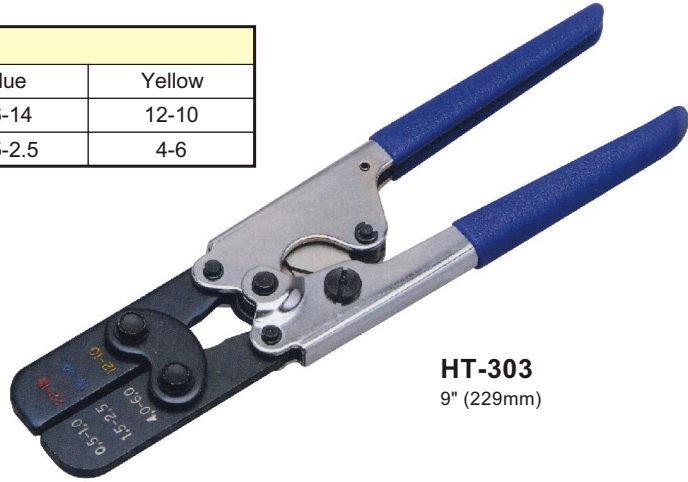


HT-303
9" (229mm)

ITEM NO.	Description
HT-202A	For computer pins & sockets, D-Sub 26-28 AWG wire. For butt-insulated connectors, 22-26 AWG wire. For telephone piercing spade lugs, 22-26 AWG wire. For open barrel connectors, 20-22 AWG wire. For open barrel connectors, 14-18 AWG wire.
HT-202B	For computer pins & sockets, D-Sub 26-28 AWG wire. For butt-insulated connectors, 22-26 AWG wire. For telephone piercing spade lugs, 22-26 AWG wire. For open barrel connectors, 20-22 AWG wire. For open barrel connectors, 14-18 AWG wire. For non-insulated terminals, 10-14, 16-18 and 20-22 AWG wire.

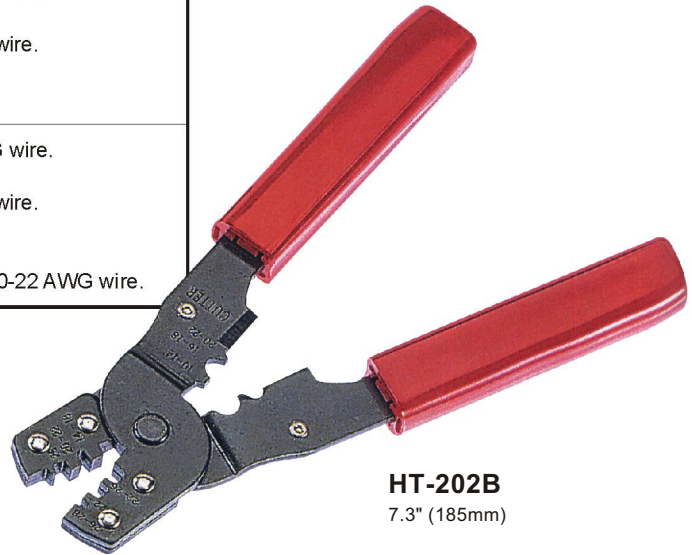

HT-202B
7.3" (185mm)

ITEM NO.	Description
HT-213	For crimping D-Sub AWG : 20-24-28

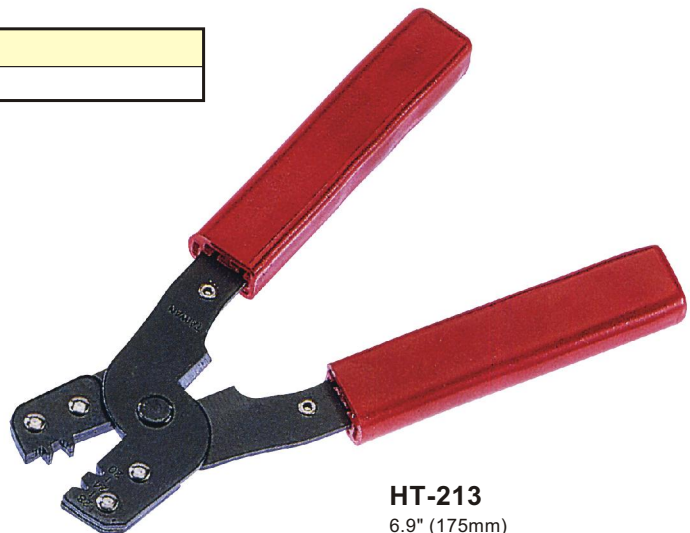

HT-213
6.9" (175mm)

PRECISE CUTTER & STRIPPER

- 6.6" 5 in 1, precise cutter & stripper with comfortable thickness handle.
- Made by CNC grinding.
- Wire stripper, wire cutter, steel wire cutter, pliers, wire loop with grinding blades for sharp cutter & stripper.
- Laser marked gauges including AWG mm.

ITEM NO.	Applicable for stripping wire size								
HT-5021	AWG	Stranded	12	14	16	18	20	22	24
		Single	10	12	14	16	18	20	22
HT-5021R		mm	2.6	2.0	1.6	1.3	1.0	0.8	0.6
HT-5022	AWG	Stranded		16	18	20	22	24	26
		Single		14	16	18	20	22	24
HT-5022R		mm		1.6	1.3	1.0	0.8	0.6	0.5
HT-5023	AWG	Stranded		22	24	26	28	30	--
		Single		20	22	24	26	28	30
HT-5023R		mm		0.8	0.6	0.5	0.4	0.32	0.25

Special stripping sizes are welcomed.

NEW



HT-5021R
7" (177mm)
With ergonomically designed handles



HT-5021
6.6" (168mm)



HT-1041
6.8" (173mm)

- 6.8" 7 in 1 crimping tools.
- Wire stripper, wire cutter, steel wire cutter, pliers, wire loop, scale mm & inch, crimping tool.

ITEM NO.	Stripping wire size					
HT-1041	AWG	10	12	14	16	18
	mm ²	5.5	3.5	2.0	1.25	0.9
HT-1042	AWG	16	18	20	22	24.26
	mm ²	1.25	0.9	0.5	0.35	0.2
HT-1043	AWG	22	24	26	28	30
	mm	0.65	0.5	0.4	0.32	0.25



HT-206
6.5" (167mm)



HT-502C
6.6" (168mm)

ITEM NO.	For cutting
HT-502C	For cutting ribbon cable, max. 30mm width use.
HT-206	6.5" Length, cuts wire O.D up to 0.41" (10.5mm ϕ)