

Rittal – The System.

Faster – better – everywhere.

Cable duct for TS IT – DK 5502.101

Date : Jan 24, 2020

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Cable duct for TS IT – DK 5502.101

created: 24.01.2020 on www.rittal.com/com-en

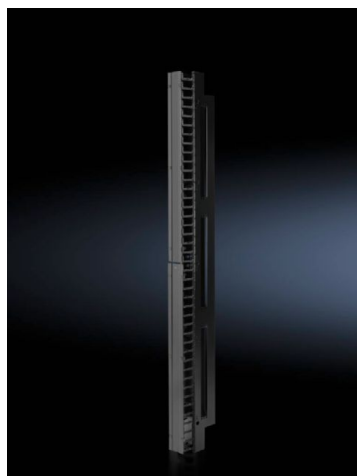

Product description

Description: Cable duct for concealed cable routing. Convenient access to the cabling at any time via the hinged duct cover, optionally removable. The duct has cable entry options to the enclosure interior and through the rear panel of the duct. The cable retaining bars enclosed with the duct are snap-mounted onto the cable fingers of the duct with variable depth to support cable routing. Alternatively, the cable duct may also be screw-fastened. For optimum air routing, it may be combined with the brush kit for TS IT.

Benefits:

- Simple assembly with tool-free quick-release fastening
- High packing density due to U-based cable routing
- Suitable for back-to-back baying
- Cable duct may be used as a shielding element to prevent air short-circuits within cold aisle containment
- Lockable cable glands, may be fitted with installation components on the 1 U mounting standard

Material: Sheet steel
Plastic to UL 94-HB

Colour: RAL 9005

Supply includes: Cover and assembly parts
incl. 4 cable retainers for spare cables

Product features

To fit: Enclosure type: TS IT
Enclosure type: TE 8000
Enclosure type: Data Rack

Dimensions: Width: 95 mm
Height: 1866 mm
Depth: 150 mm

Installation options: In TS IT with 482.6 mm (19") mounting angles, height 2200 mm
In TS IT with 482.6 mm (19") mounting frame, height 2000 mm
In the Data Rack with 45 U

Units:	42 U
Packs of:	1 pc(s).
Copper weight (kg per piece):	0
EAN:	4028177814448
Customs tariff number:	94039010
ETIM 7.0:	EC000012
ETIM 6.0:	EC000012
eCl@ss 8.0/8.1:	27400703
eCl@ss 6.0/6.1:	27400703
Product description:	DK Cable duct, 42 U, for TS IT, Height 2000 mm: with mountingframe, Height 2200 mm: with profiles