



[Company Profile](#) [News](#) [Products](#) [Technology Support](#) [CSR](#) [Contact Us](#)



[Home](#) > [Products](#) > [Electrical Terminals](#)

## Products

### Electrical Terminals

NON-INSULATED  
COPPER TERMINALS

INSULATED COPPER  
TERMINALS

INSULATED QUICK  
DISCONNECTORS

VINYL-INSULATED  
DISCONNECTORS (V SERIES)

NYLON-INSULATED  
DISCONNECTORS (NY SERIES)

PC-INSULATED  
DISCONNECTORS (NI SERIES)

## INSULATED QUICK DISCONNECTORS

[Product Overview](#)

[Barrel Types](#)

[Terminals Type](#)

[Wire Range](#)

[Stud Size](#)

» [INSULATED QUICK DISCONNECTORS](#) » [NYLON-INSULATED DOUBLE CRIMP TERMINALS \(NYD SERIES\)](#)

### NYLON-INSULATED DOUBLE CRIMP BULLET DISCONNECTORS



VINYL-INSULATED DOUBLE CRIMP TERMINALS (D SERIES)

NYLON-INSULATED DOUBLE CRIMP TERMINALS (NYD SERIES)

PC-INSULATED DOUBLE CRIMP DISCONNECTORS (NID SERIES)

VINYL-INSULATED (MOLDED EASY ENTRY) DOUBLE CRIMP DISCONNECTORS (VYDX SERIES)

NYLON-INSULATED DOUBLE CRIMP DISCONNECTORS (NYDX SERIES)

PC-INSULATED DOUBLE CRIMP DISCONNECTORS TERMINALS (NIDX SERIES)

FLAG FEMALE DISCONNECTORS


## DIN TERMINALS

## CORD END TERMINALS

## WATER PROOF HEAT SHRINKABLE TERMINALS (WITH ADHESIVE TUBING)

## BUTT SPLICE & OTHER CONNECTORS

## STAINLESS STEEL TIE

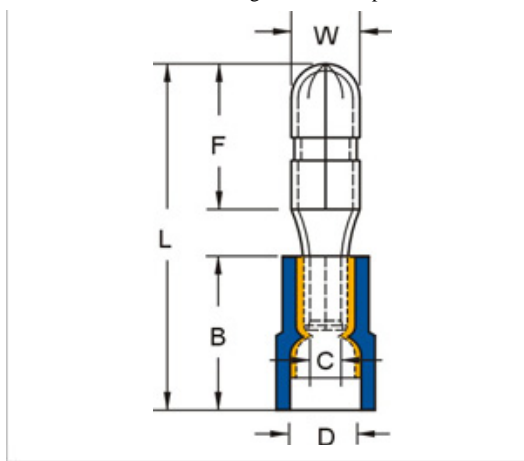

### MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16	14	12	10
AMP.	3	4	7	10	15	20	24

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

INSULATION MATERIAL: NYLON

INSULATION COLOR:

22-16A.W.G.: RED  16-14A.W.G.: BLUE

12-10A.W.G.: YELLOW

DOUBLE CRIMP: WITH COPPER SLEEVE ON BARREL

TERMINAL MATERIAL: BRASS

### TERMINAL BARREL I.D:

22-16A.W.G. : C=1.7mm 16-14A.W.G. : C=2.3mm 12-10A.W.G. : C=3.4mm

Product List (Total: 10 records)

Data Source Page NO. : [P.205](#),

WIRE RANGE A.W.G.	ITEM NO.	DIMENSION inch(mm)						Q'TY BOX
		W	F	L	B	D	T	

	mm <sup>2</sup>								
Nylon Cable Ties	22-16 A.W.G.	MPNYD1-156	0.157 4	0.335 8.5	0.866 22	0.433 11	0.157 4.000	0.016 0.4	1000
JIS TERMINALS	0.5-1.5 mm <sup>2</sup>	MPNYDL1-156	0.157 4	0.413 10.5	0.945 24	0.433 11	0.157 4.000	0.016 0.4	1000
BATTERY MODULAR CONNECTORS		MPNYD1-180	0.177 4.5	0.335 8.5	0.866 22	0.433 11	0.157 4.000	0.016 0.4	1000
TOOLS		MPNYDL1-180	0.177 4.5	0.425 10.8	0.953 24.2	0.433 11	0.157 4.000	0.016 0.4	1000
CONTINUAL TYPE TERMINALS	16-14 A.W.G.	MPNYD2-156	0.157 4	0.335 8.5	0.866 22	0.433 11	0.197 5.000	0.016 0.4	1000
WHITE GOODS TERMINALS & HOUSINGS	1.5-2.5 mm <sup>2</sup>	MPNYDL2-156	0.157 4	0.413 10.5	0.945 24	0.433 11	0.197 5.000	0.016 0.4	1000
		MPNYD2-180	0.177 4.5	0.335 8.5	0.866 22	0.433 11	0.197 5.000	0.016 0.4	1000
AUTOMOTIVE CONNECTORS		MPNYDL2-180	0.177 4.5	0.425 10.8	0.953 24.2	0.433 11	.197 5.0	0.016 0.4	1000
		MPNYD2-195	0.197 5	0.335 8.5	0.866 22	0.433 11	0.197 5.000	0.016 0.4	1000
	12-10 A.W.G. 4-6 mm <sup>2</sup>	MPNYD5-195	0.197 5	0.335 8.5	0.925 23.5	0.512 13	0.256 6.500	0.016 0.4	500

Data Source Page NO. : [P.205](#),



Township, Changhua County 507, Taiwan  
(R.O.C.)

Tel: 886-4-7582765

Fax: 886-4-7582786

E-mail: [exp@ksterminals.com.tw](mailto:exp@ksterminals.com.tw)

• [Contact Us](#)



COPYRIGHT © K.S.TERMINALS INC. Design By e-Giant, B2B Global-Trade, Global Machine, Global Bicycle, Shopping HiGo.