



Identification	Type	socket type 2
	Part-No.	700499
General		
Housing material	Luranyl KR 2456-3	
Colour	grey, RAL 7035	
Class of flammability according to UL 94	V1	
Surface	smooth	
Operation temperature range	-40 °C – 80 °C	
Storage temperature range	-20 °C – 60 °C	
Dimensions (w x h x d)	7.0x39.5x20.7 mm	
Weight (kg/piece)	0.002	
Termination	attachable to TS 35 (EN50022)	

24.07.2012 – Subject to technical modification

Part-No. 700499

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Dimensions

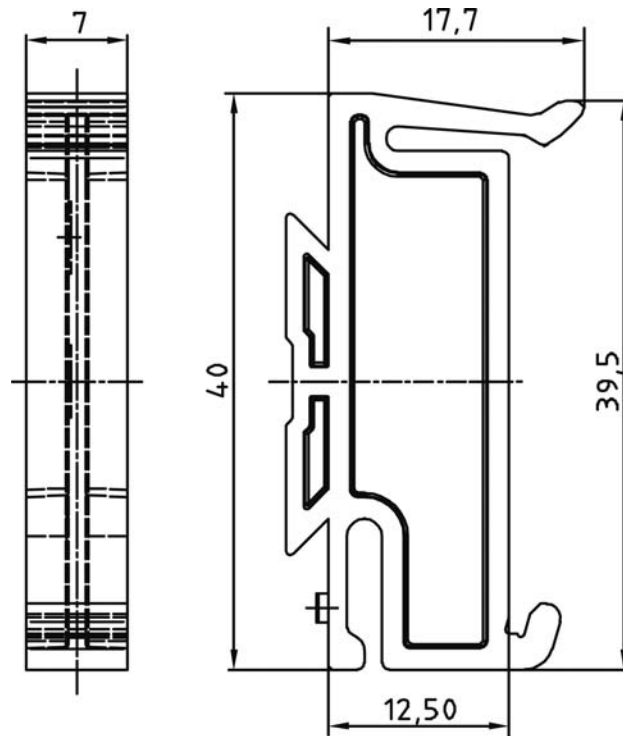

24.07.2012 – Subject to technical modification

Part-No. 700499

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY