



## CP 216

# Piezoelectric pressure transducer

### FEATURES

---

- » From the Vibro-Meter® product line
- » Extreme temperature capability:  
–70 to 520°C
- » High-pressure capability:  
up to 350 bar
- » Pressure sensitivity:  
200 pC/bar
- » Frequency range:  
2 Hz to 15 kHz
- » Internal case insulation
- » Certified for use in potentially explosive atmospheres



CP 216



### APPLICATIONS

---

- » Dynamic pressure monitoring over a wide temperature range, requiring high reliability

### DESCRIPTION

---

The use of man-made piezoelectric material in the CP 216 a compression-mode dynamic pressure transducer produces an extremely stable device.

The CP 216 is designed for long-term monitoring or development testing over wide temperature ranges in extreme environments, such as gas turbines.

The transducer is fitted with an integral mineral insulated cable (twin conductors) that can be terminated with either a LEMO connector or a high-temperature connector developed by Vibro-Meter. Cable assemblies are available to connect the transducer to an IPC 704 signal conditioner.



Information contained in this document may be subject to Export Control Regulations of the European Union, USA or other countries. Each recipient of this document is responsible for ensuring that transfer or use of any information contained in this document complies with all relevant Export Control Regulations. ECN N/A.

## SPECIFICATIONS

---

### General

Input power requirements	: None
Signal transmission	: 2-pole system insulated from casing, charge output
Signal processing	: Charge converter

### Operating

(at +23°C ±5°C, +73°F ±9°F)	
Sensitivity (typical, at 2 Hz)	: 200 pC/bar (13.8 pC / psi)
Sensitivity deviation	: See Typical response curves on page 3
Dynamic measuring range (random)	: 0.0005 bar to 250 bar (0.007 psi to 3626 psi)
Overload capacity (spikes)	: Up to 350 bar (5076 psi) (static + dynamic components)
Linearity	: < ±1% over dynamic measuring range
Acceleration sensitivity	: ≤ 0.5 pC/g (0.0025 bar/g, 0.036 psi/g)
Resonant frequency	: > 80 kHz
Frequency response	: 2 to 15000 Hz ±5%. The lower cutoff frequency is determined by the electronics used.
Capacitance (nominal)	
• Pole to pole	: 320 pF for transducer + 200 pF/m of cable
• Pole to casing	: 13 pF for transducer + 300 pF/m of cable
Internal insulation resistance	: > 10 <sup>9</sup> Ω. > 5x10 <sup>4</sup> at 450 °C (842 °F).

### Environmental

Transducer temperature range	
• Continuous	: -54 to 470 °C (-65 to 878 °F)
• Extreme applications	: -70 to 520 °C (-94 to 968 °F). See Typical response curves on page 3.
Connector temperature range	
• Vibro-Meter high-temperature connector	: -70 to 650 °C (-94 to 1202 °F)
• LEMO connector	: -55 to 155 °C (-67 to 311 °F)
Shock acceleration	: < 2000 g peak (half sine, 1 ms duration) along sensitive axis
Corrosion, humidity	: NIMONIC® alloy 90, hermetically welded. (INCONEL® alloy 600 for the cable.)
Radiations	
• Gamma flux	: 10 <sup>10</sup> erg/g no effect
• Neutron flux	: 10 <sup>17</sup> n/cm <sup>2</sup> no effect

**SPECIFICATIONS** (continued)

**Explosive atmospheres**

Available in Ex approved versions for use in hazardous locations

Type of protection Ex i: intrinsic safety		
Europe	EC type examination certificate	LCIE 02 ATEX 6106 X II 2 G (Zones 1, 2) Ex ib IIC T6 ... 530°C Gb

Type of protection Ex nA: type of protection "n" (non sparking)		
Europe	Voluntary type examination certificate	LCIE 09 ATEX 1040 X II 3G (Zone 2) Ex nA IIC T6 ... 530°C Gc
International	IECEx certificate of conformity*	IECEx LCI 10.0014X Ex nA IIC T6 ... 530°C Gc

\*Not engraved on the product marking.

**⚠ For specific parameters of the mode of protection concerned and special conditions for safe use, please refer to the certificates that are available from Meggitt SA on demand.**



**Calibration**

Dynamic calibration at factory at 1 bar peak and 2 Hz (+23°C). No subsequent calibration necessary.

**Mechanical**


- Dimensions : See Mechanical drawings on page 4
- Weight
  - Transducer : 12 g
  - Cable : 25 g/m
- Cable : Mineral insulated (MI) cable, two conductors
- Connector : LEMO or Vibro-Meter high temperature
- Mounting : See the mounting adaptors in Accessories on page 5 and refer to the CP xxx piezoelectric pressure transducers installation manual

**TYPICAL RESPONSE CURVES**

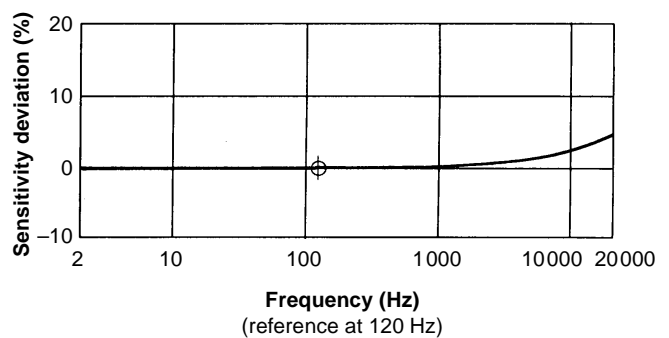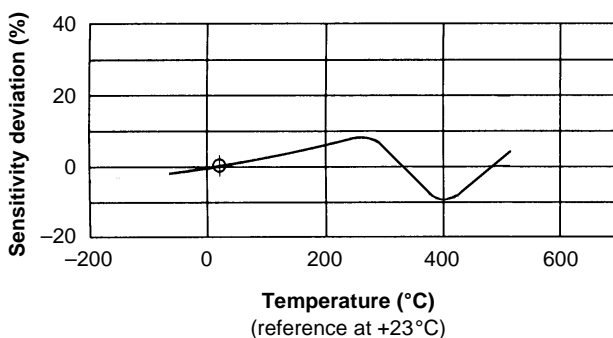


MECHANICAL DRAWINGS


CP 216 with LEMO connector

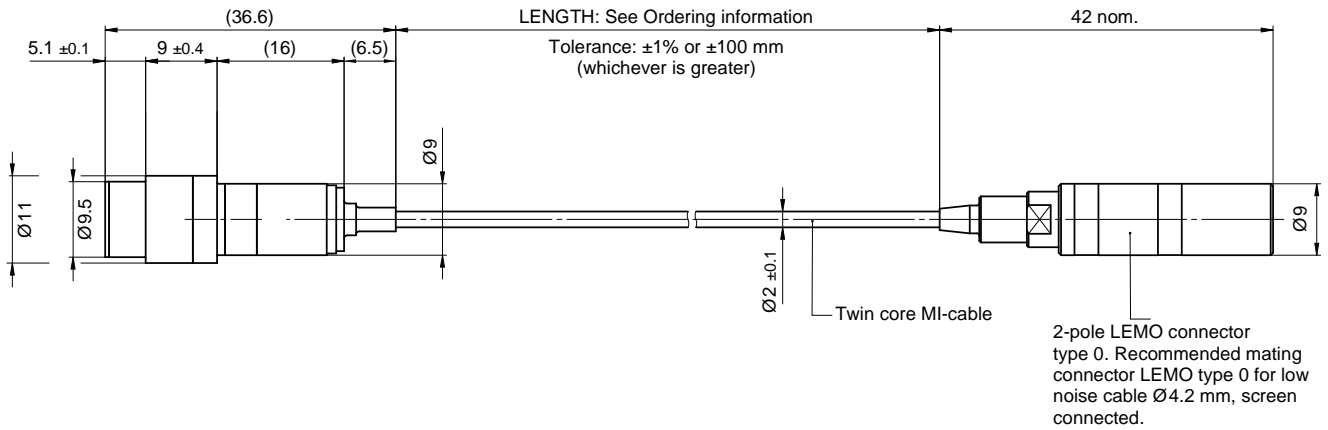


Note: All dimensions in mm unless otherwise stated.



CP 216 with Vibro-Meter high-temperature connector

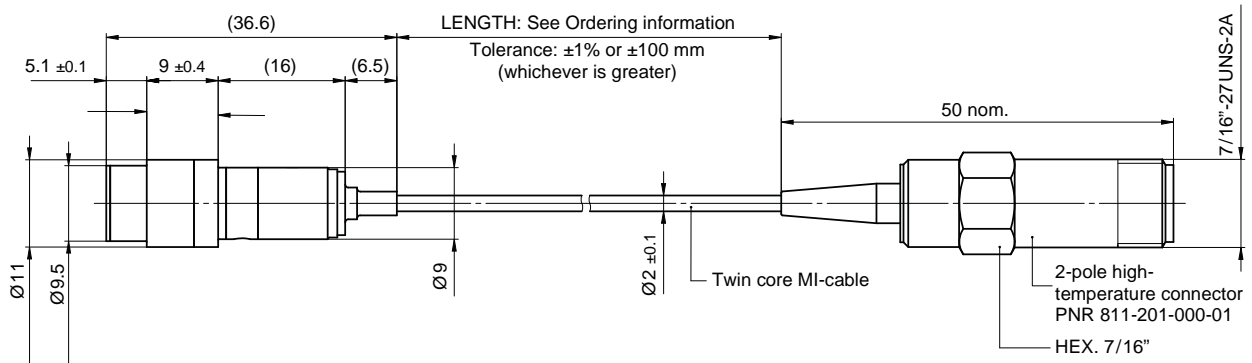

Note: All dimensions in mm unless otherwise stated.




ORDERING INFORMATION

To order please specify

Type	Designation	Cable length	Ordering number
CP 216	Piezoelectric pressure transducer with LEMO connector	Defined when ordering	143-216-000-011
		0.5 m	143-216-000-021
		1 m	143-216-000-031
		2 m	143-216-000-041
		3 m	143-216-000-051
CP 216	Piezoelectric pressure transducer with Vibro-Meter high-temperature connector	Defined when ordering	143-216-000-111
		0.5 m	143-216-000-121
		1 m	143-216-000-131
		2 m	143-216-000-141
		3 m	143-216-000-151
		5 m	143-216-000-161

ACCESSORIES

MA 104 mounting adaptor for CP 216 with LEMO connector

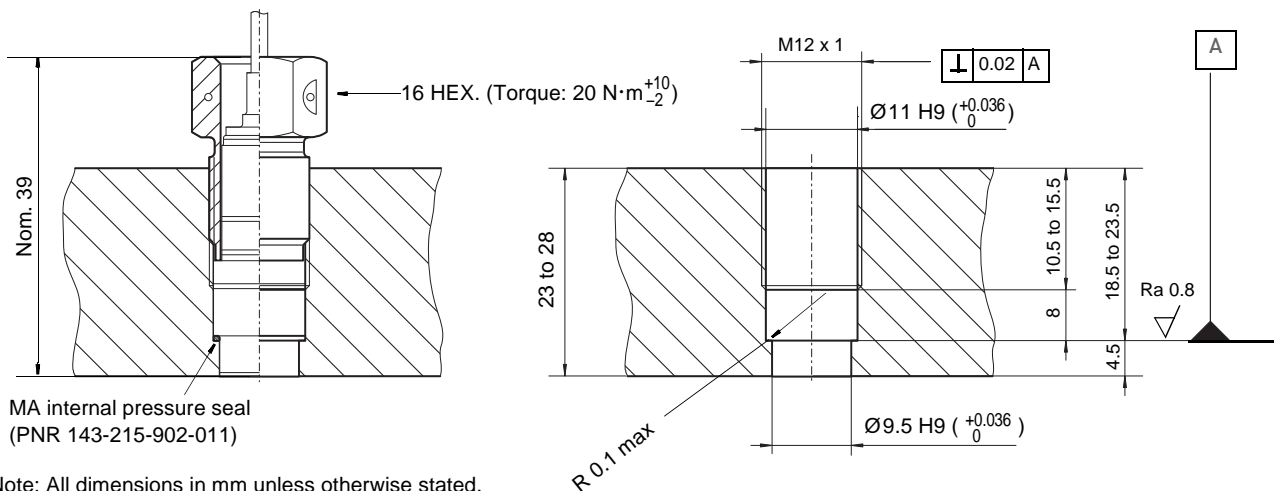


Ordering information

Type	Designation	Ordering number
MA 104	Mounting adaptor Note: The MA 104 mounting adaptor does not include the MA seal below.	809-104-000-011
MA seal	MA internal pressure seal	143-215-902-011

ACCESSORIES (continued)

MA 126 mounting adaptor for CP 216 with Vibro-Meter high-temperature connector

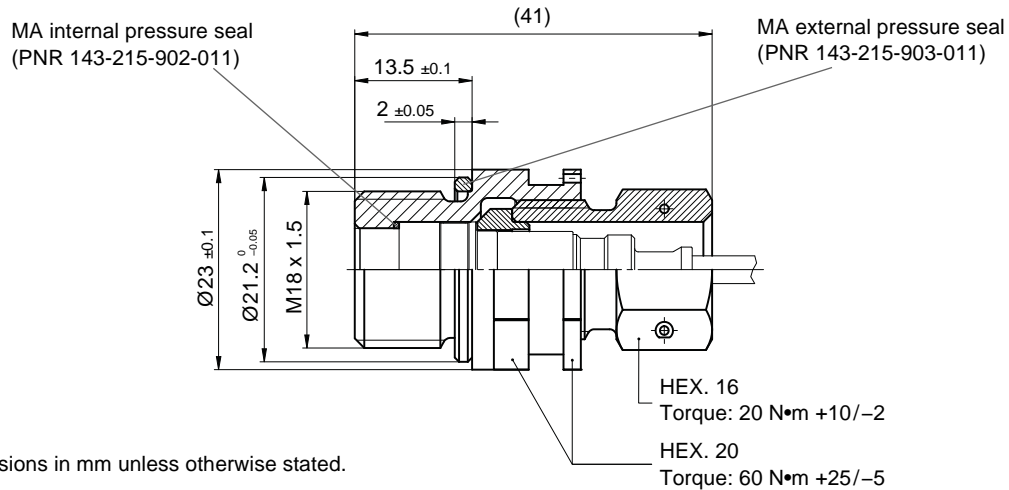

Note: All dimensions in mm unless otherwise stated.

Ordering information

Type	Designation	Ordering number
MA 126	Mounting adaptor	809-126-000-511
Note: The MA 126 mounting adaptor includes the MA seals below.		
MA seal	MA internal pressure seal	143-215-902-011
MA seal	MA external pressure seal	143-215-903-011

Cable assemblies

EC 153	Refer to the data sheet
EC 222	Refer to the data sheet
EC 119	Refer to the data sheet

Signal conditioner

IPC 704	Refer to the data sheet
---------	-------------------------

Galvanic separation

GSI 127	Refer to the data sheet
---------	-------------------------

Headquartered in the UK, Meggitt PLC is a global engineering group specializing in extreme environment components and smart sub-systems for aerospace, defence and energy markets.

Meggitt Sensing Systems is the operating division of Meggitt specializing in sensing and monitoring systems, which has operated through its antecedents since 1927 under the names of ECET, Endevco, Ferroperm Piezoceramics, Lodge Ignition, Sensorex, Vibro-Meter and Wilcoxon Research. Today, these operations are integrated under one strategic business unit called Meggitt Sensing Systems, headquartered in Switzerland and providing complete systems, using these renowned brands, from a single supply base.

The Meggitt Sensing Systems facility in Fribourg, Switzerland was formerly known as Vibro-Meter SA, but is now Meggitt SA. This site produces a wide range of vibration and dynamic pressure sensors capable of operation in extreme environments, leading-edge microwave sensors, electronics monitoring systems and innovative software for aerospace and land-based turbo-machinery.



All statements, technical information, drawings, performance rates and descriptions in this document, whilst stated in good faith, are issued for the sole purpose of giving an approximate indication of the products described in them, and are not binding on Meggitt SA unless expressly agreed in writing. Before acquiring this product, you must evaluate it and determine if it is suitable for your intended application. Unless otherwise expressly agreed in writing with Meggitt SA, you assume all risks and liability associated with its use. Any recommendations and advice given without charge, whilst given in good faith, are not binding on Meggitt SA.

Meggitt Sensing Systems takes no responsibility for any statements related to the product which are not contained in a current Meggitt Sensing Systems publication, nor for any statements contained in extracts, summaries, translations or any other documents not authored by Meggitt Sensing Systems. We reserve the right to alter any part of this publication without prior notice.

In this publication, a dot (.) is used as the decimal separator and thousands are separated by thin spaces. Example: 12345.67890.

## Sales offices

Meggitt Sensing Systems has offices in more than 30 countries. For a complete list, please visit our website.



ISO 9001  
FS 584089



## Your local agent

## Head office

Meggitt SA  
Route de Moncor 4  
PO Box 1616  
CH - 1701 Fribourg  
Switzerland

Tel: +41 26 407 11 11  
Fax: +41 26 407 13 01

[www.meggittsensingystems.com](http://www.meggittsensingystems.com)  
[www.vibro-meter.com](http://www.vibro-meter.com)