

Elastische Einpresszone / *compliant pressfit zone*

Isolierwerkstoff / *housing material* : PBT GF30

Bauart 7 / *type 7*

Anforderungsstufe 2 = 400 Steckzyklen / *performance class 2 = 400 mating cycles*

Fehlende Masse und Angaben gemäß IEC 60 603-2 / *DIN EN 60 603-2*

Missing information and dimensions according to IEC 60 603-2 / DIN EN 60 603-2


Schichtaufbau im metallisierten Loch siehe Zeichnung 114124

diameter of drilled hole see drawing 114124


- 1) $\varnothing 1,0 \pm 0,09$ Durchmesser des metallisierten Loches
- $\varnothing 1,0 \pm 0,09$ Diameter of finished plated-through hole
- $\varnothing 1,15 \pm 0,025$ Bohrungsdurchmesser des Loches
- $\varnothing 1,15 \pm 0,025$ Diameter of drilled hole

Bestückungsplan / *contact layout*

■ bestückt / *assemble*

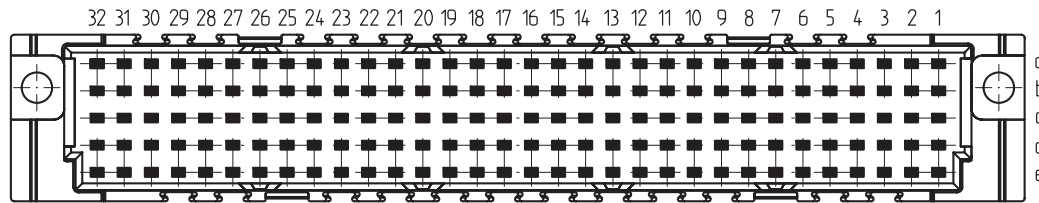

Leiterplatten-Lochbild / *PCB drillhole pattern*

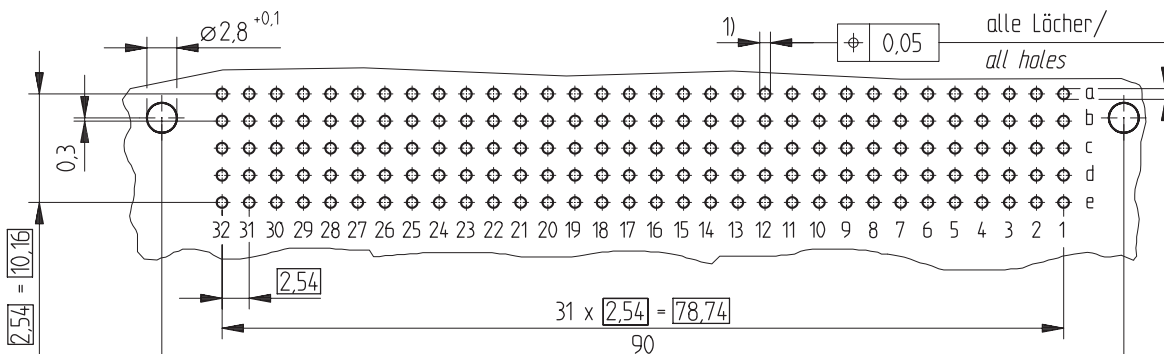

Information:	Tolerances	 All Dimensions in mm	Scale	2:1
	All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Designation Federleiste E 160 EE <i>Fem. Connector E 160 Pressfit</i>	
Consider protection memo from DIN 34 a Index	Subject to modification without prior notice. Drawing will not be updated.		www.ERNI.com 254006	
	Date	23.02.2007	H:00061003.SZA STVE	