


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

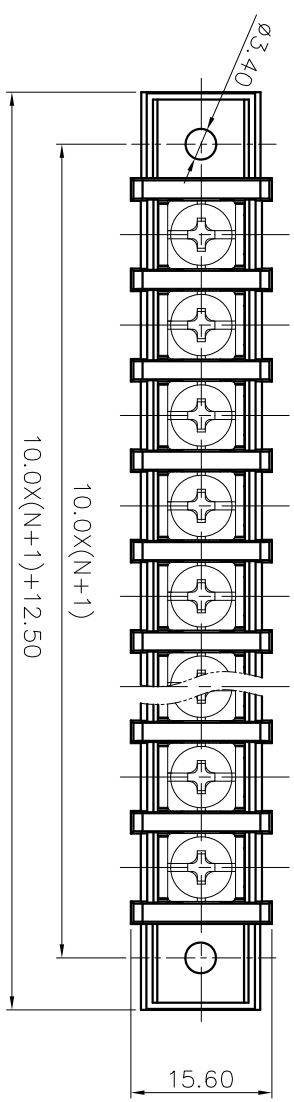

10.0X(N+1)+12.50




10.0X(N+1)

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 20A
- 2. Torque value : M4 , 10.53lbf.in
- 3. Wire range : 22~12AWG

NOTES2:



- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 10.0mm, Poles : N=02~24P
- 3. Withstanding voltage : AC1600V/1Min
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

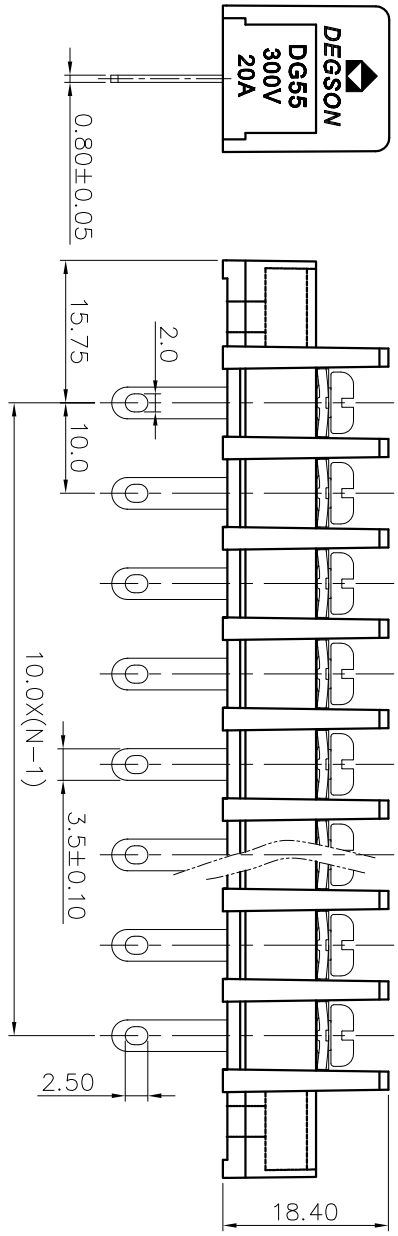

12.40±0.30

Pitch	range	in mm	Nominal dimension	range	in mm	tolerance
Over	6	10	30	60	100	150
TO	10	24	30	60	100	150
6	10	24	30	60	100	150
±0.15±0.20±0.30±0.30±0.50±0.70±1.00±1.30 ±2°						

6. RoHS Compliance

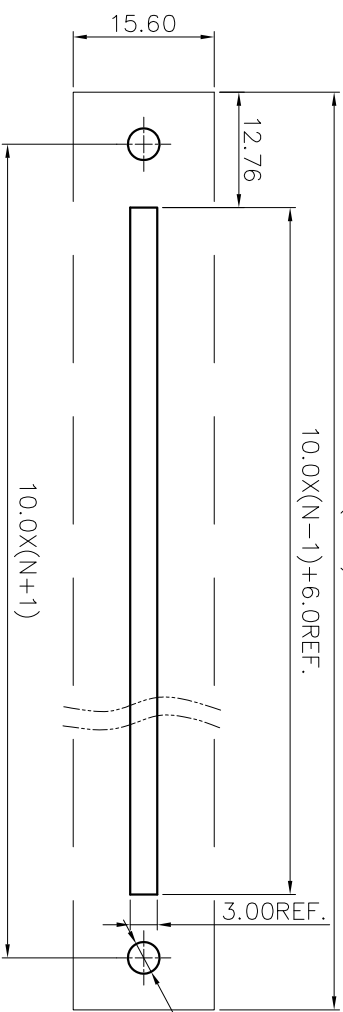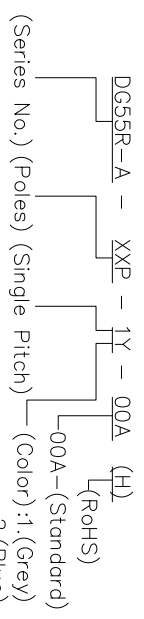

10.0X(N-1)+6.0REF.

10.0X(N+1)+12.50

10.0X(N+1)

- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1