

PRODUKTINFORMATION

Vi reserverar oss mot fel samt förbehåller oss rätten till ändringar utan föregående meddelande


ELFA artikelnr

| | |
|--------------------------------|----------------------------|
| 37-085-18 Relä M15M-12V | M15 MAH 001 8 12VDC |
| 37-085-26 Relä M15M-24V | M15 MAH 001 8 24VDC |
| 37-085-67 Relä M15F-12V | M15 FAH 001 8 12VDC |
| 37-085-75 Relä M15F-24V | M15 FAH 001 8 24VDC |
| 37-086-17 Relä M15E-12V | M15 EAH 001 8 12VDC |
| 37-086-25 Relä M15E-24V | M15 EAH 001 8 24VDC |

Miniature Power Relays Series M15

Type M15 . . . 100/001

Monostable

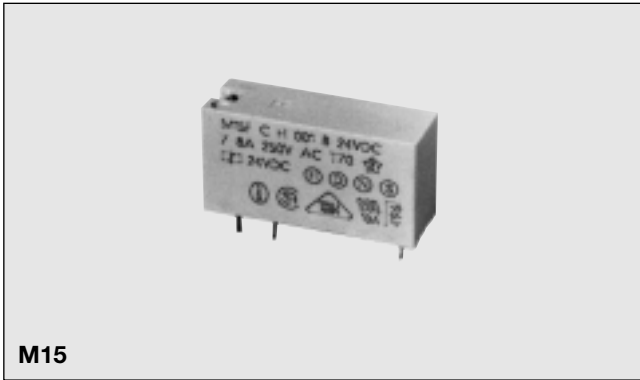


- Miniature size 15 mm high
- PCB mounting
- 4 kV / 8 mm insulation
- Switching capability 8 A / 250 VAC
- DC coils 2 to 147 VDC
- General purpose, industrial electronics
- Sealed according IP 67 standard
- 4 different pin layout configurations
- Low coil power consumption

Product Description

Miniature sealed relay according to IP 67. Suitable for automatic soldering. Produced on fully automated production line.

Space saving design for compact packages. Very low contact noise due to short bounce time (NO contact)

Ordering Key **M15 M A H 001 8 24VDC**

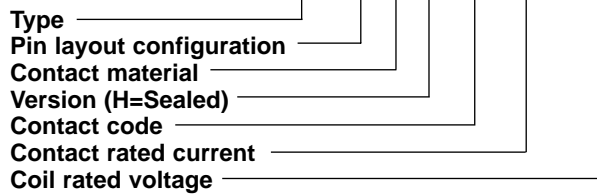

Pin layout configuration
 M = 3.5 mm
 B = 5.0 mm
 F = 2.5 mm
 E = 3.2 mm / 5.0 mm

Contact material
 A = Ag CdO
 B = Ag Ni
 C = Ag CdO, Au plated
 D = Ag CdO, gilded
 E = AgNi, Au plated
 F = Ag, gilded
 S = Ag SnO₂

Type Selection

| Contact configuration | Contact rating | Contact code |
|--|----------------|--------------|
| 1 normally open contact (SPST-NO {1-form A}) | 8 A | 100 |
| 1 change over contact (SPDT-CO {1-form C}) | 8 A | 001 |

Coil Characteristics, DC (20 °C)

| Rated voltage VDC | Winding resistance $\Omega \pm 10\%$ | Operating range | | Drop out voltage \geq VDC |
|-------------------|--------------------------------------|-----------------|----------|-----------------------------|
| | | Min. VDC | Max. VDC | |
| 3.0 | 40 | 2.00 | 5.3 | 0.150 |
| 5.0 | 115 | 3.40 | 9.0 | 0.250 |
| 6.0 | 160 | 4.00 | 10.6 | 0.300 |
| 8.0 | 290 | 5.40 | 14.2 | 0.400 |
| 12.0 | 640 | 8.40 | 21.2 | 0.600 |
| 18.0 | 1450 | 12.60 | 31.9 | 0.900 |
| 24.0 | 2550 | 16.00 | 42.2 | 1.200 |
| 48.0 | 10250 | 33.50 | 84.7 | 2.400 |
| 110.0 | 31000 | 73.01 | 147.0 | 5.500 |

Temperature Influence

Operating voltages for step excitation. Minimum operating voltage is referred to +20 °C/+68 °F ambient temperature; maximum operating voltage is referred to +40 °C/+104 °F ambient temperature.

| t °C | t °F | K1 | K2 |
|------|------|------|------|
| 0 | 32 | 0.92 | 1.15 |
| 10 | 50 | 0.96 | 1.12 |
| 20 | 68 | 1.00 | 1.09 |
| 30 | 86 | 1.04 | 1.05 |
| 40 | 104 | 1.08 | 1.00 |
| 50 | 122 | 1.12 | 0.94 |
| 60 | 140 | 1.16 | 0.88 |
| 70 | 158 | 1.20 | 0.81 |

Values of minimum and maximum operating voltage in respect to ambient temperature (t) may be obtained applying following formulas:

$$V_{\min t} = K1 \cdot V_{\min 20}$$

$$V_{\max t} = K2 \cdot V_{\max 40}$$

Contact Characteristics

| | |
|---|-----------------------------|
| Rating | 8 A |
| Material (standard version) ¹⁾ | Ag CdO |
| Current (for AC) | |
| Rated current | 8 A |
| Max. switching current | 10 A |
| Voltage | |
| Rated voltage | 250 VAC - 50 Hz |
| Max. switching voltage | 440 VAC (max 1500 VA) |
| Max. switching voltage (VDE 0435) | 380 VAC |
| Power | |
| Max. switch. power with resistive load in AC | 2000 VA |
| Max. switch. power with resistive load in DC | See diagram 1 |
| Min. switching current ³⁾ | 100 mA at 24 VDC |
| Life | |
| Expected life at: | |
| 8 A-250 VAC - cos φ = 1 | 100000 cycles |
| 5 A-250 VAC - cos φ = 0.4 | 100000 cycles |
| Mechan. life at max. switching frequency of 18.000 cycles/h | 30 x 10 ⁶ cycles |

General Data

| | |
|---|--|
| Operating time at rated voltage | ≤ 9 ms |
| Operating bounce time | ≤ 1 ms |
| Release time | ≤ 3 ms |
| Release bounce time | ≤ 3 ms |
| Ambient temperature ²⁾ | - 40 °C to +70 °C |
| Vibration resistance | 2,5 mm p.p. 5 ÷ 45 Hz 10 G, 45 ÷ 100 Hz |
| Shock resistance | 10 G, 11 ms |
| Inside protection according to IEC 144 | IP 67 sealed |
| Weight | 10 g |
| Working class/type of service | C / Continuous |

¹⁾If required, the contacts can be supplied with flash gilded silver contacts for storage purpose (24 VDC/10mA), as well as with gold plated silver contacts for very low switching levels, in the range of 10 mA and 10 mV. AgNi contacts for DC loads and AgSnO₂ contacts for heavy loads are also available.

²⁾Supplying the relay coil at the maximum voltage given in the table "Temperature Influence", the maximum ambient temperature value decreases from 70° to 40°C.

³⁾Typical value

Insulation

| | |
|---|-------------------------|
| Insulation Resistance at 500 VDC | 2 x 10 ⁷ M Ω |
| Test voltage (1 min.) Open contacts Coil/Contacts | 1000 VAC 4000 VAC |
| Insulation group according to VDE 0110 Contact/Coil IGR Open/Contact IGR | C/660 C/250 |













Special loads - Motor loads

| | AC1 | (IEC 947-5) | | Motor loads | | | |
|----------------|---------|------------------|----------------|-------------|---------|--------------------|---------|
| | 250 VAC | AC 15 250 VAC | DC13 24 VDC | AgCdO | | AgSnO ₂ | |
| | | | | 115 VAC | 250 VAC | 115 VAC | 250 VAC |
| M15 001 | 8A | 2.5A | 5A | 1/8 HP | 1/3 HP | 1/3 HP | 3/4 HP |

Dimensions

Pin View


Wiring Diagrams

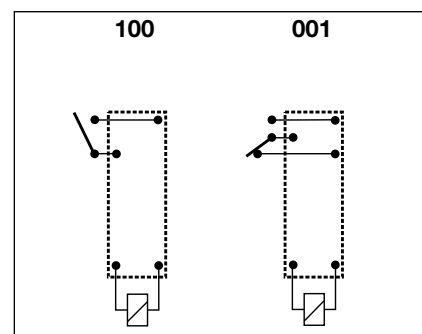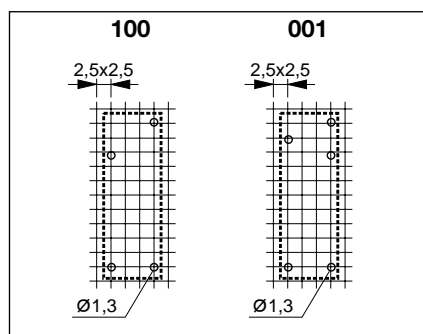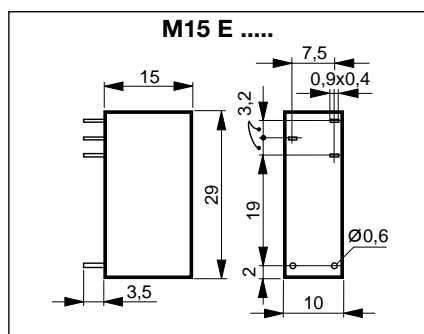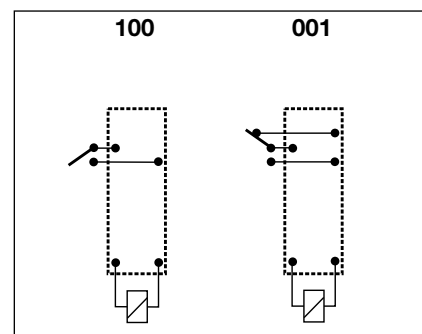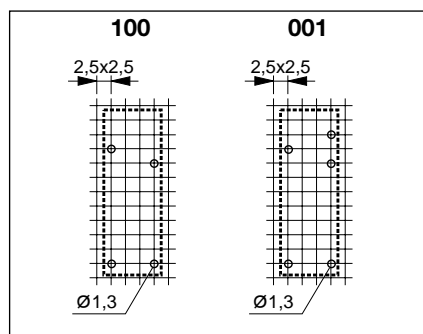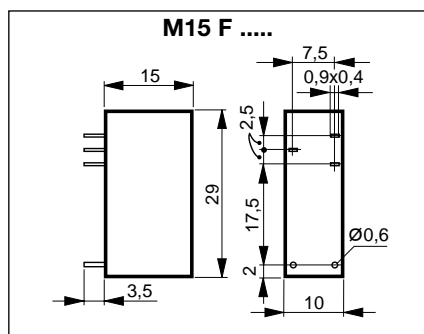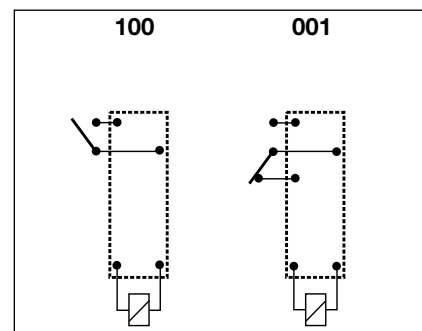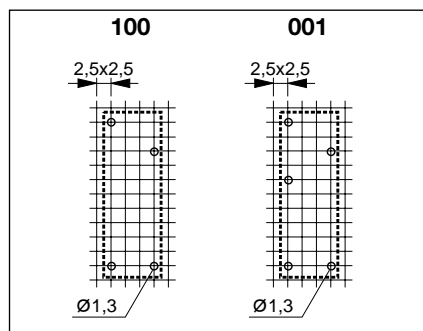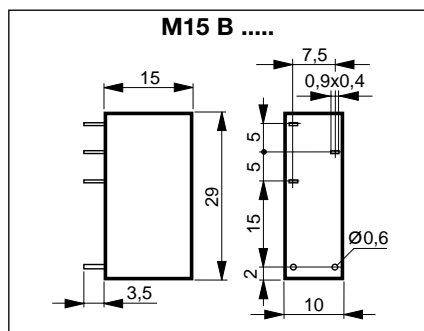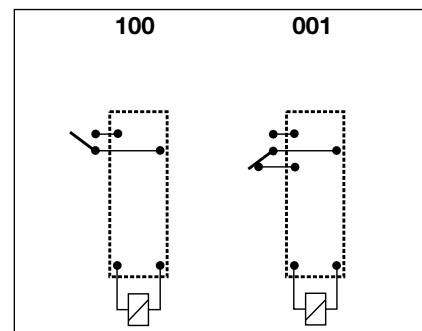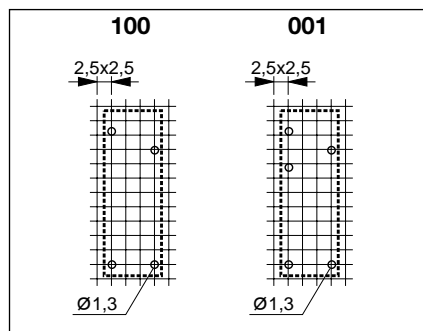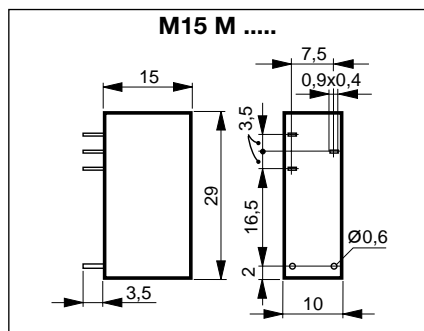


View from solder side.

Diagrams

1 Max. switching power DC

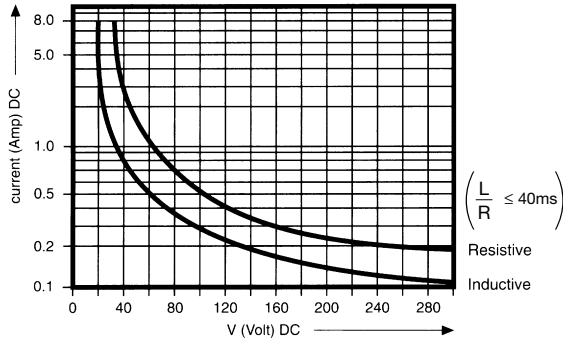


2 Expected switching cycles/switching current at 250 VAC. For resistive loads and repetition rate 360 cycles/h.

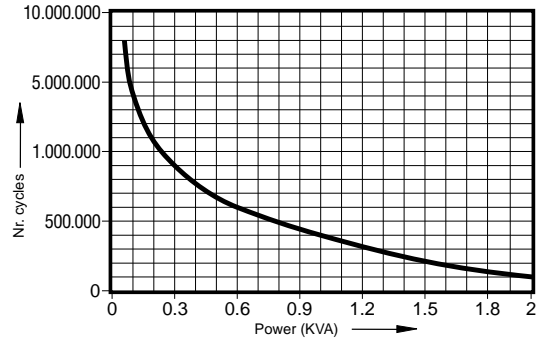

Diagrams

3 Reduction of expected life against load power factor $\cos \varphi$


For all types

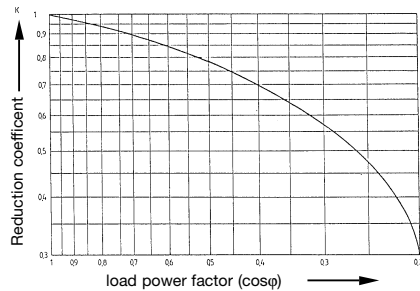

Application Hints

Use of sealed relays

The M15 relay types are completely sealed (according to IEC 68 part 2 - 17 {DIN 40046} QC 2 - test). They are flux proof and are suited for automated soldering (wave soldering) as well as for immersion washing. If maximum utilization of the switching capacity is required, it is recommended to open the relay after completion of the soldering/washing process by breaking out the corresponding pin as indicated.

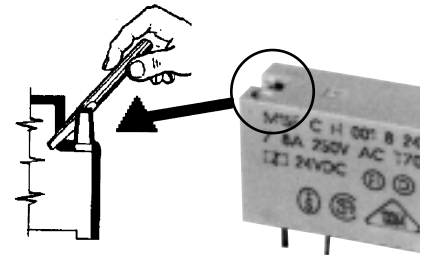

Product safety

Operations outside the stated ratings shown in this catalogue may result in a possible failure or unsafe operating conditions.

Approvals



ITALY



U.S.A.



CANADA



GERMANY



SWITZERLAND



SWEDEN



DENMARK



NORWAY



FINLAND

The approvals are not generally applicable to all relay versions of a particular type.

For further information please apply for relevant data sheets ref. **3.84.00.10.X**