


Jun.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

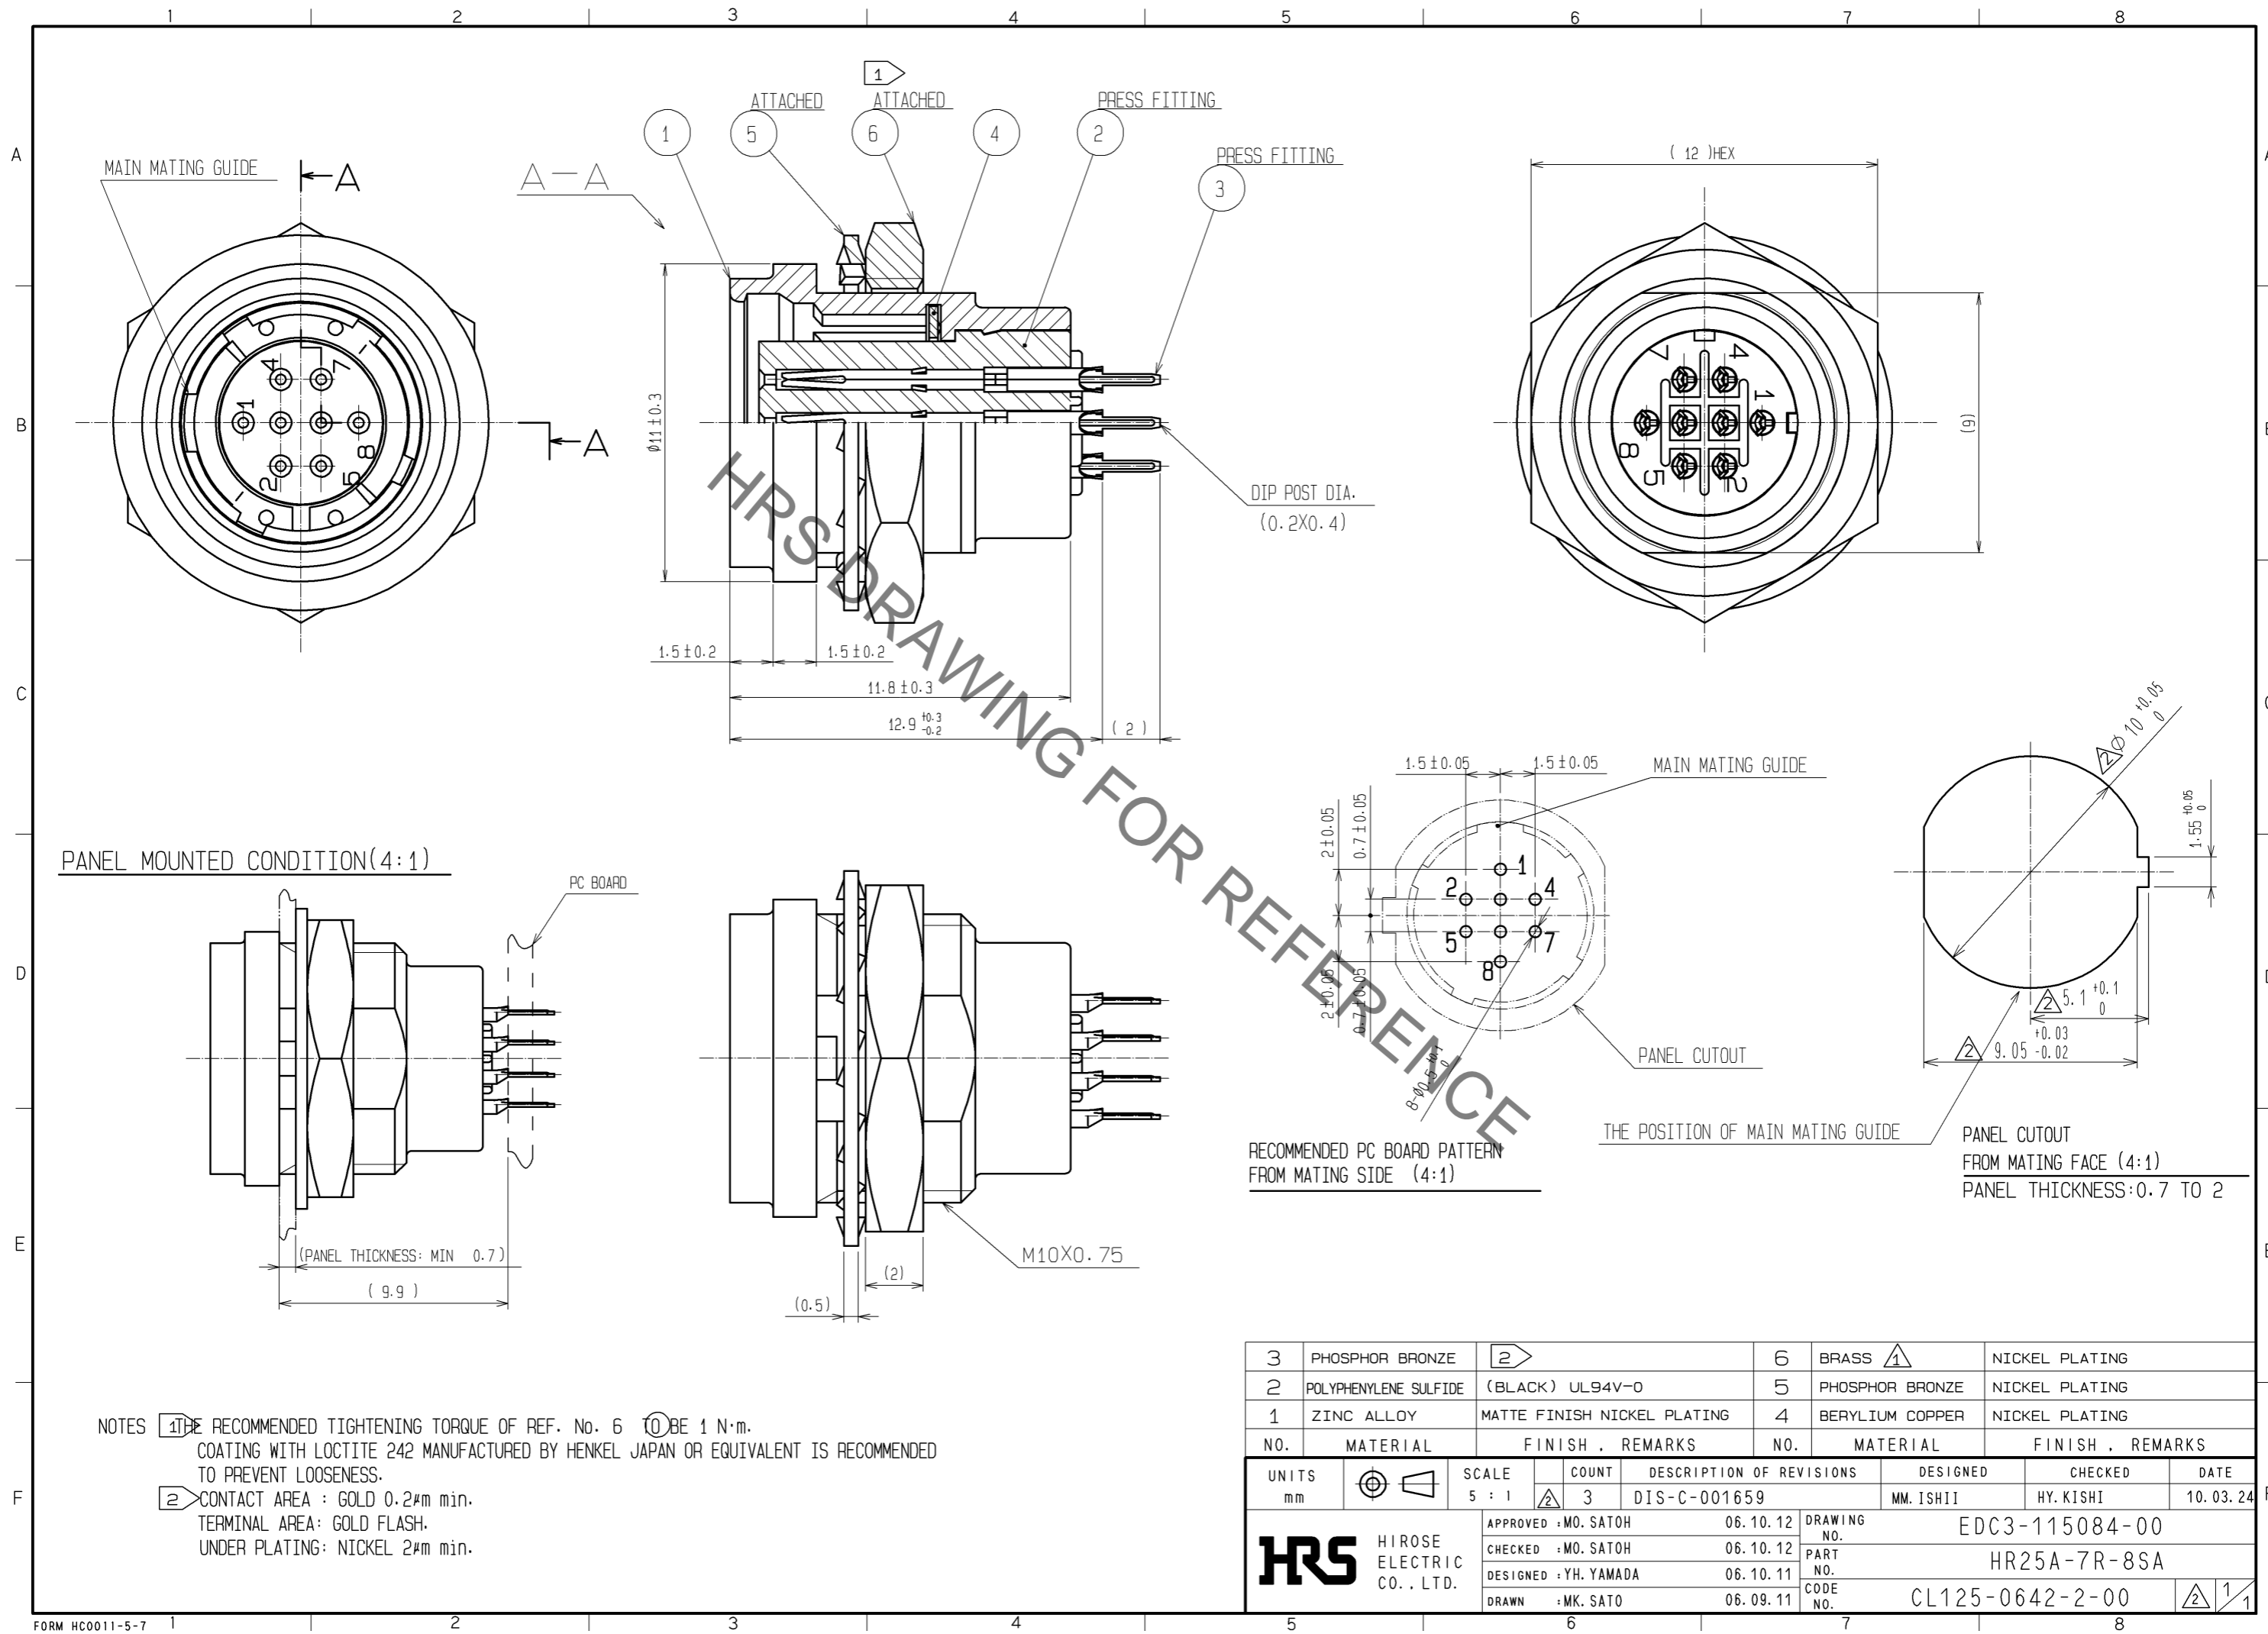

NOTES

① THE RECOMMENDED TIGHTENING TORQUE OF REF. No. 6 TO BE 1 N·m.
 COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.

② CONTACT AREA : GOLD 0.2 μ m min.
 TERMINAL AREA: GOLD FLASH.
 UNDER PLATING: NICKEL 2 μ m min.

3	PHOSPHOR BRONZE	②	6	BRASS	①	NICKEL PLATING
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	5	PHOSPHOR BRONZE		NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	4	BERYLIUM COPPER		NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS	
UNITS	ϕ \square	SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED
mm		5 : 1	② 3	DIS-C-001659		MM. ISHII
APPROVED : MO. SATOH		06.10.12	DRAWING NO.		EDC3-115084-00	
CHECKED : MO. SATOH		06.10.12	PART NO.		HR25A-7R-8SA	
DESIGNED : YH. YAMADA		06.10.11	CODE NO.		CL125-0642-2-00	
DRAWN : MK. SATO		06.09.11			② 1/1	