


**USDR-M | metric thread**

Metal connector, safety-type, straight, turnable metric outer thread, incl. ferrule [brass], sealing [TPE] and O-ring [NBR]

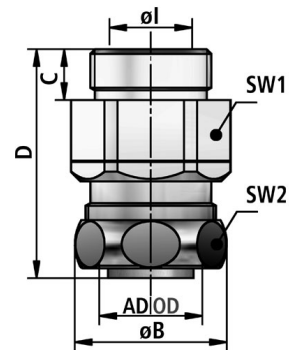

**Material:** nickel-plated brass

**Temperature:** -40°C ... +125°C

**Protection class [acc. to EN 60529]:** IP00



FLEXA No.	OD [mm]	Threadtype	Conduit ID	Conduit OD	Ø 1 [mm]	Ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	Weight [kg/100]	PU [pcs.]
5013.327.012	10,0	M12 x 1,5	8,0	10,0	6,5	19,0	10,0	28,0	15	17	2,400	10
5013.327.016	14,0	M16 x 1,5	11,0	14,0	9,0	23,0	10,0	30,0	21	21	5,000	10
5013.327.020	17,0	M20 x 1,5	14,0	17,0	11,0	27,0	10,0	30,0	24	25	6,400	10
5013.327.025	21,0	M25 x 1,5	18,0	21,0	14,5	31,0	11,0	31,0	30	29	9,500	10
5013.327.032	27,0	M32 x 1,5	23,0	27,0	19,5	39,0	13,0	38,0	36	36	14,900	10
5013.327.040	36,0	M40 x 1,5	31,0	36,0	27,5	48,0	13,0	42,0	46	45	23,900	2
5013.327.050	45,0	M50 x 1,5	40,0	45,0	35,5	57,0	14,0	50,0	55	54	36,200	2
5013.327.063	56,0	M63 x 1,5	51,0	56,0	45,0	70,0	14,0	54,0	70	66	61,000	2

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.