


## RQGK-M | metric thread

## Connectors FLEXAquick for ROHRflex corrugated plastic tubing

Plastic connector, quick-type, straight, metric nickel-plated brass outer thread, integrated snap-in sleeve with sealing, high density

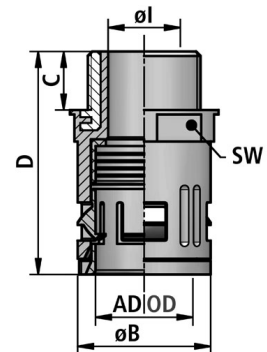

**Material:** PA plastics | nickel-plated brass 58

**Temperature:** -40°C ... +120°C

**Protection class [acc. to EN 60529]:** IP 69K



FLEXA No.	OD [mm]	Colour	Threadtype	ø I [mm]	ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
5107.010.212	10,0	Black	M12 x 1,5	7,0	20,0	10,0	38,5	18	1,080	50
5107.410.212	10,0	Black	M12 x 1,5	7,0	20,0	5,0	33,5	18	0,800	50
5107.013.212	13,0	Black	M12 x 1,5	7,0	24,0	10,0	40,0	22	1,500	50
5107.413.212	13,0	Black	M12 x 1,5	7,0	24,0	5,0	35,0	22	1,500	50
5107.413.216	13,0	Black	M16 x 1,5	8,5	24,0	5,0	35,0	22	1,500	50
5107.013.216	13,0	Black	M16 x 1,5	8,5	24,0	12,0	42,0	22	1,660	50
5107.015.216	15,8	Black	M16 x 1,5	10,0	27,0	12,0	43,5	25	1,940	50
5107.415.216	15,8	Black	M16 x 1,5	10,0	27,0	5,0	36,5	25	1,800	50
5107.015.220	15,8	Black	M20 x 1,5	11,0	27,0	12,0	43,5	25	2,020	50
5107.415.220	15,8	Black	M20 x 1,5	11,0	27,0	6,0	37,5	25	1,695	50
5107.021.220	21,2	Black	M20 x 1,5	15,0	29,5	12,0	50,0	28	2,360	50
5107.421.220	21,2	Black	M20 x 1,5	15,0	29,5	6,0	44,0	28	2,000	50
5107.021.225	21,2	Black	M25 x 1,5	16,0	33,0	13,0	50,0	31	3,240	25
5107.421.225	21,2	Black	M25 x 1,5	16,0	33,0	7,0	44,0	31	2,300	25
5107.028.225	28,5	Black	M25 x 1,5	18,0	37,0	13,0	53,0	35	3,840	25
5107.428.225	28,5	Black	M25 x 1,5	18,0	37,0	7,0	47,0	35	3,200	25
5107.028.232	28,5	Black	M32 x 1,5	20,0	41,0	14,0	54,0	39	5,080	25
5107.428.232	28,5	Black	M32 x 1,5	20,0	41,0	8,0	48,0	39	4,000	25
5107.034.232	34,5	Black	M32 x 1,5	24,0	44,0	14,0	58,0	42	5,760	25
5107.434.232	34,5	Black	M32 x 1,5	24,0	44,0	8,0	52,0	42	4,800	25
5107.034.240	34,5	Black	M40 x 1,5	27,5	48,0	17,0	64,0	46	6,000	25
5107.434.240	34,5	Black	M40 x 1,5	27,5	48,0	8,0	55,0	46	5,400	25
5107.042.240	42,5	Black	M40 x 1,5	32,0	58,0	17,0	76,0	55	9,050	10
5107.442.240	42,5	Black	M40 x 1,5	32,0	58,0	8,0	67,0	55	7,700	10
5107.042.250	42,5	Black	M50 x 1,5	37,5	63,0	17,0	76,0	60	14,500	10
5107.442.250	42,5	Black	M50 x 1,5	37,5	63,0	9,0	68,0	60	13,700	10
5107.054.250	54,5	Black	M50 x 1,5	39,0	68,0	17,0	88,0	65	14,500	10
5107.454.250	54,5	Black	M50 x 1,5	39,0	68,0	9,0	80,0	65	15,000	10
5107.054.263	54,5	Black	M63 x 1,5	49,0	74,0	17,0	88,0	70	23,000	10



FLEXA No.	OD [mm]	Colour	Threadtype	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
5107.454.263	54,5	Black	M63 x 1,5	49,0	74,0	10,0	81,0	70	22,700	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.