

SSV/AP-0E

cylindrical photosensors




Micro Detectors

Italian Sensors Technology



Indicative image

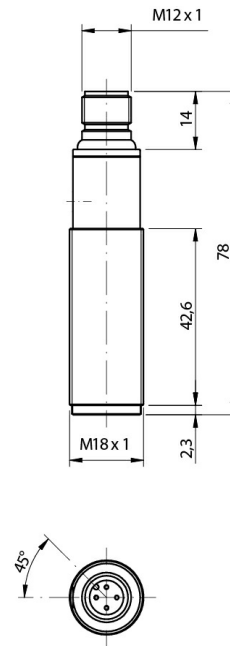

Detection properties

Nominal sensing distance	3m
Thermal drift of Sr	≤10% Sr
Repeat Accuracy	5%
minimum detectable object	Ø 1mm
Sensitivity adjustment	No

Application

Function Principle	Through beam
Emitter/Receiver	Receiver
Optic position	Axial

Outputs

Output type	PNP
-------------	-----

Output Function	NO
Switching frequency	250Hz

Electrical data

Operating Voltage	10-30Vdc
No-Load supply current	≤20mA
Load current	≤100mA
Leakage current	≤10μA
Output voltage drop	2,5V max. IL =100 mA
Max ripple content	10%
LED indicators	Yellow (output state)
Time delay before availability	≤200ms
Short-circuit protection	Yes
Reverse Polarity Protection	Yes
Emission	Red (660nm)
Interference to external light	5000lux (incandescent lamp), 10000lux (sunlight)
Impulsive Overvoltage Protection	Yes

Mechanical data

Dimensions	M18 x 1 /L =78mm
Weight	30g
Housing Material	PBT
Connections	M12 4pin Plug
Active Head Material	PMMA
Tightening torque	1Nm
Operating temperature	- 25°C...+ 70° C (Without freeze)


Test/Approvals

Approvals	CE, cULus
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67


Accessories

Supplied Accessories	nuts M18 x 1, screwdriver
----------------------	---------------------------

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

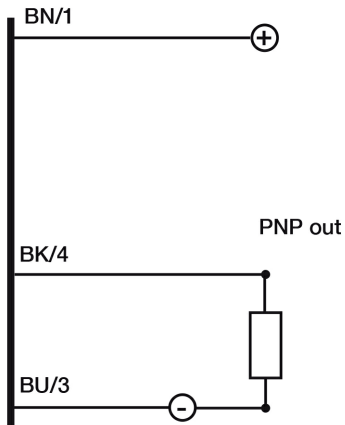

CONNECTOR

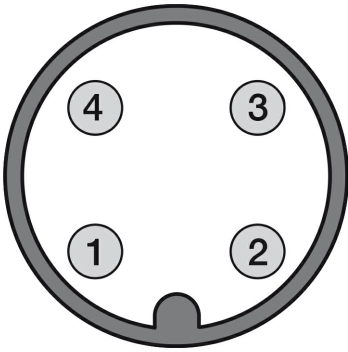

M.D. Micro Detectors S.p.A.

Strada S. Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

15/08/2019 07:30:36