

MDL GPS/GLONASS 3V0~5V0 SMA PLUG RG-174 5m 6 GPSGLONASS03D-S6-01-A

1. Application:

This application shall apply for antenna unit which shall be used with an engine for an automobile. (for impedance 50Ω)

2. Appearance:

Antenna Unit (with radome, connector, and cable – refer to an attached drawing)

Dimensions	37.5*34.5*12.5mm	;	Radome	#D
Weight	90g (typ)	;	Connector	SMA PLUG
Cable	RG 174 5m	;	Magnet	YES
Anti-slip pad	NO	;	Label	YES
Double side adhesive	NO			

3. Operating Condition:

Temperature -40 to +90°C

4. Storage Condition:

Temperature -40 to +90°C

Humidity 65±20 % RH

5. Electrical Specification:

* All value are defined at 25±15°C, 65±20 % RH, power handling 1 u watt, air pressure 960 ±100 HPA unless otherwise noted.

* Patch characteristics are measured with 70x70 mm ground plane in an anechoic chamber.

5-1 Patch

Characteristics	Specification
Frequency Domain	1575MHz~1615MHz
Center Frequency	1593±5 MHz
Bandwidth (10dB return loss)	43 MHz typ
Average Gain	2.0 dBic typ.
Polarization	R.H.C.P.

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± X.X = ± X.XX =
 ANGLES = ± HOLE DIA = ±



INPAQ TECHNOLOGY CO., LTD.

SCALE :

UNIT : mm

DRAWN BY : 趙彥年

CHECKED BY : 楊奇峰

DESIGNED BY : 莊意堂

APPROVED BY : 曾源標

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : MDL GPS/GLONASS 3V0~5V0 SMA PLUG
 RG-174 5m 6 GPSGLONASS03D-S6-01-A

DOCUMENT
 NO.

ENS000046440

SPEC REV.
 P0


5-2 Filter / LNA

Characteristics		Specification
Frequency Domain		1575MHz~1615MHz
Center Frequency		1593 MHz
Gain	3.0V±0.1V	27±3 dB
	5.0V±0.1V	32±3 dB
Noise Figure		2.0 dB Max
Filter Outband attenuation		30dB typ. fo±50MHz 50dB typ. fo±100MHz (fo=1593MHz)
Output V.S.W.R		2.0 max
Operation Voltage		DC=3.0V~5.0V
Current	3.0V±0.1V	7±3 mA
Current	5.0V±0.1V	13±3 mA

5-3 Overall Specification <Through Antenna, LNA, without cable loss>

Characteristics		Specification
Frequency Domain		1575MHz~1615MHz
Center Frequency		1593 MHz
Average Gain	3.0V±0.1V	29 dBic typ(for ground 70x70mm)
	5.0V±0.1V	34 dBic typ(for ground 70x70mm)
Output Impedance		50 ohm
Output VSWR		2.0 typ
Operation Voltage		DC=3.0V~5.0V
Current	3.0V±0.1V	7±3 mA
	5.0V±0.1V	13±3 mA

6. Antenna Dimensions:

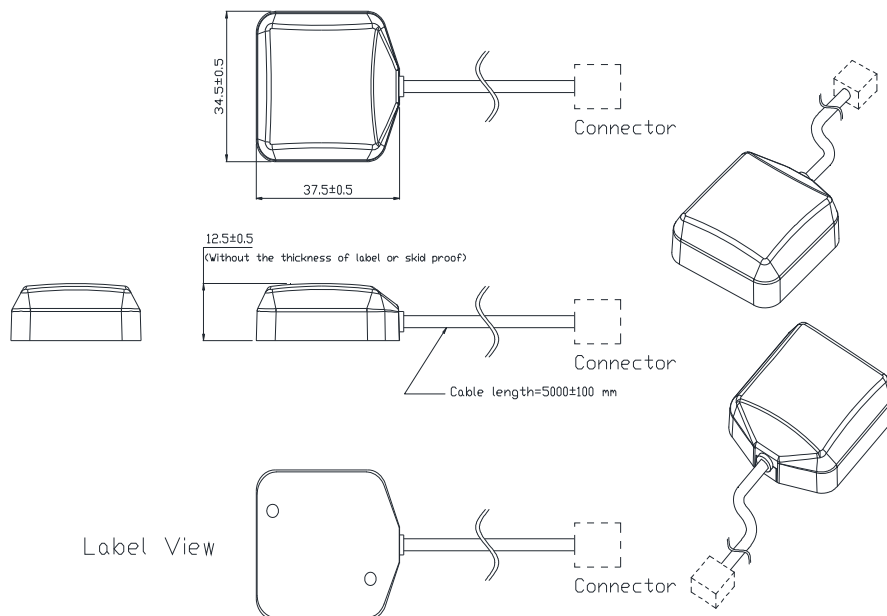

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± X.X = ± X.XX = ±
 ANGLES = ± HOLE DIA = ±



INPAQ TECHNOLOGY CO., LTD.

SCALE :

UNIT : mm

DRAWN BY : 趙彥年

CHECKED BY : 楊奇峰

DESIGNED BY : 莊意堂

APPROVED BY : 曾源標

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : MDL GPS/GLONASS 3V0~5V0 SMA PLUG
 RG-174 5m 6 GPSGLONASS03D-S6-01-A

DOCUMENT NO.

ENS000046440

SPEC REV.
 P0

Connector appearance : SMA PLUG



UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± X.X = ± X.XX =
ANGLES = ± HOLE DIA = ±



INPAQ TECHNOLOGY CO., LTD.

SCALE :

UNIT : mm

DRAWN BY : 趙彥年

CHECKED BY: 楊奇峰

DESIGNED BY : 莊意堂

APPROVED BY : 曾源標

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

**TITLE : MDL GPS/GLONASS 3V0~5V0 SMA PLUG
 RG-174 5m 6 GPSGLONASS03D-S6-01-A**

**DOCUMENT
 NO.**

ENS000046440

**SPEC REV.
 P0**