


IF YOU NEED ANY HELP IN DETERMINING WHAT FUSE YOU NEED CONTACT NATIONAL FUSE PRODUCTS AT 1-800-328-0496 OR EMAIL SALES@NATIONALFUSE.COM



■ 溶断時間-電流特性曲線 Melting Time-Current Characteristics Curves

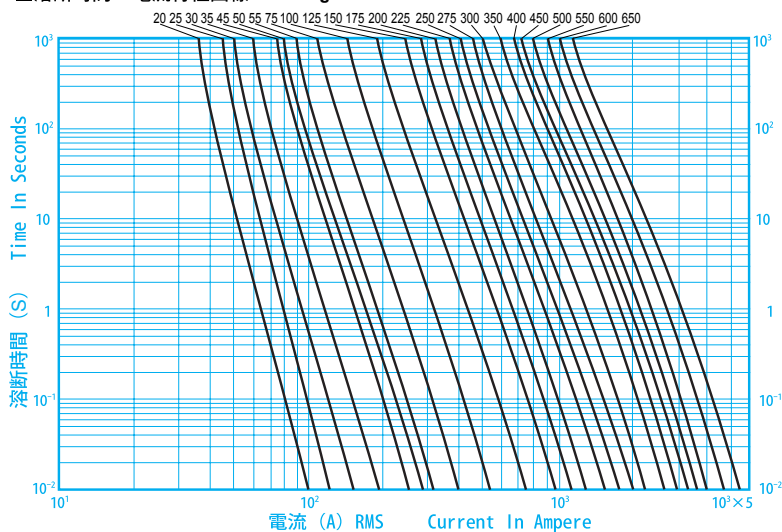

●仕様 (UL・スタンダード共通) Specifications

Type		定格電流	溶断 I <sup>2</sup> t	全しゃ断 I <sup>2</sup> t	Total I <sup>2</sup> t (A <sup>2</sup> S)	電力損失 (W)	接続導体 mm <sup>2</sup>	外形寸法 Dimensions (m/m)										質量	パツ	Fig	
Without indicator	With indicator	Ampere Rating	Pre-arc I <sup>2</sup> t (A <sup>2</sup> S)	at AC600V-100KA		Power Loss	Connect Conductor	A	B	C	D	E	F	G	H	W	T	g	pcs		
600FH-20	600FH-20S	20A	20		300	4	24														
600FH-25	600FH-25S	25A	30		500	5	24														
600FH-30	600FH-30S	30A	50		700	6	24	76	62	46	27	21	8	6.5	27	14	2	60	10	1	
600FH-35	600FH-35S	35A	70		1,200	6	24														
600FH-50	600FH-50S	50A	160		1,600	8	24														
600FH-55	600FH-55S	55A	200		2,000	10	24														
600FH-75	600FH-75S	75A	380		3,500	15	100														
600FH-100	600FH-100S	100A	650		6,000	20	100	95	75	52	37	32	12	8.5	37	22	3	170	10	1	
600FH-125	600FH-125S	125A	1,300		9,000	25	100														
600FH-150	600FH-150S	150A	2,000		14,000	30	100														
600FH-175	600FH-175S	175A	2,600		22,000	30	150														
600FH-200	600FH-200S	200A	3,600		28,000	30	150	102	80	52	42	38	12	10.5	42	25	3.5	265	5	1	
600FH-225	600FH-225S	225A	4,700		34,000	35	150														
600FH-250	600FH-250S	250A	6,000		41,000	40	150														
600FH-275	600FH-275S	275A	9,000		51,000	45	240														
600FH-300	600FH-300S	300A	10,000		65,000	45	240	109	84	52	50	46	15	10.5	50	34	3.5	370	5	1	
600FH-350	600FH-350S	350A	17,000		97,000	55	240														
600FH-400	600FH-400S	400A	20,000		125,000	60	240														
600FH-450	600FH-450S	450A	25,000		150,000	70	240	102	80	52	42	38	12	10.5	46	25	7	495	4	2	
600FH-500	600FH-500S	500A	32,000		180,000	80	300														
600FH-550	600FH-550S	550A	43,000		230,000	80	300														
600FH-600	600FH-600S	600A	54,000		300,000	85	360	109	84	52	50	46	15	10.5	54	34	7	730	3	2	
600FH-650	600FH-650S	650A	68,000		390,000	90	360														

- 600FH 400A以上のヒューズを使用する場合は600SPFの方が経済的です。
- 警報ヒューズとマイクロスイッチはオプションです。
- ULご注文の際には、品名の末尾にULと記入して下さい。

- Total I<sup>2</sup>t: AC600V-100KA
- Micro switch and/or indicator: Optional
- When ordering a UL product, please put "UL" at the end of the ampere rating.

◆外形図 Outline Dimensions (m/m)

fig 1

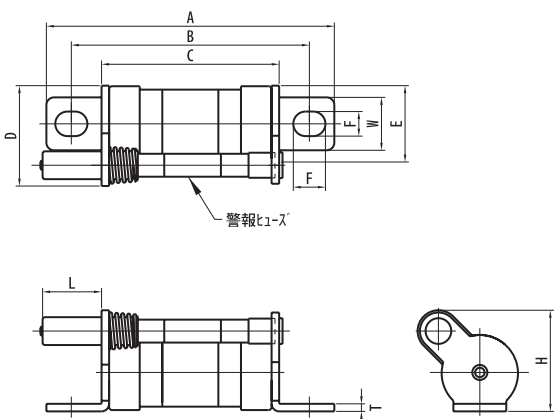


fig 2

